


GoTo USA Focused Delivery Program Pneumatics




Pneumatics GoTo Catalog

Bosch Rexroth is pleased to present pneumatic products as part of our GoTo Focused Delivery Program. The GoTo program provides you with fast delivery of the industry's most widely used pneumatic products, and lets you "go to" quick reference internet pages for more information, technical specifications and ordering details.

For additional information on the GoTo Program and a complete list of other quality Rexroth products available in the focused delivery program go to:

www.boschrexroth-us.com/GoTo

Bosch Rexroth Corporation, Pneumatics Distributor List

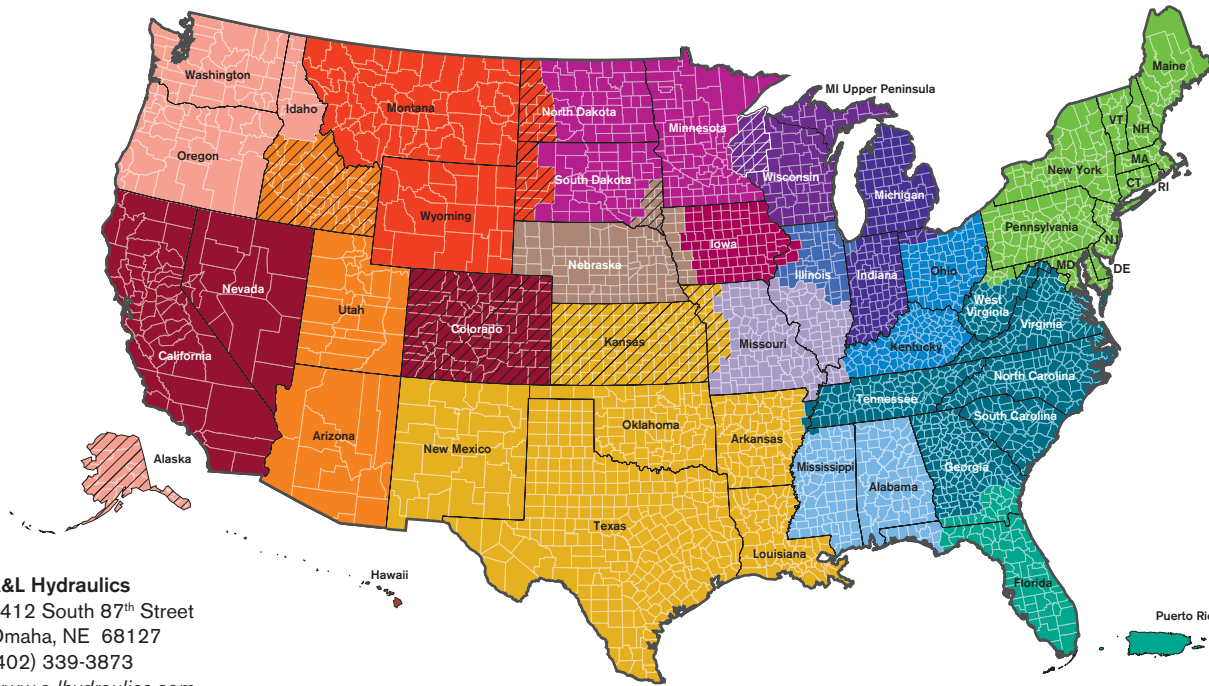

A&L Hydraulics
 4412 South 87th Street
 Omaha, NE 68127
 (402) 339-3873
www.a-lhydraulics.com

Airline Hydraulics
 3557 Progress Drive
 Bensalem, PA 19020
 (800) 999-7378
www.airlinehyd.com

CMA/Flodyne/Hydradyne
 1000 Muirfield Drive
 Hanover Park, IL 60133
 (630) 563-3600
www.cmaf.com

Fluid System Components, Inc.
 1700 Suburban Drive
 DePere, WI 54115
 (920) 337-0234
www.fscinc.com

Gulf Controls Company, LLC
 5201 Tampa West Boulevard
 Tampa, FL 33634
 (800) 282-9125
www.gulfcontrols.com

Hitech Automation, Inc.
 914 S. Highway Drive
 Fenton, MO 63026
 (636) 305-9988
www.hitech-automation.com

Hydraulic Controls, Inc.
 4700 San Pablo Avenue
 Emeryville, CA 94608
 (510) 658-8300
www.hydraulic-controls.com

Hydrotech, Inc.
 10052 Commerce Park Drive
 Cincinnati, OH 45246
 (513) 881-7000
www.hydrotech.com

Innotek Corporation
 9140 Zachary Lane North
 Maple Grove, MN 55369
 (763) 493-2810
www.innotek-ep.com

Iowa Fluid Power, Inc.
 1610 Blairs Ferry Road NE
 Cedar Rapids, IA 52402
 (800) 333-7004
www.ifpusa.com

John Henry Foster Co.
 4700 Lebourget Drive
 St. Louis, MO 63134
 (314) 427-0600
www.jhf.com

Livingston & Haven, LLC
 11529 Wilmar Boulevard
 Charlotte, NC 28273
 (704) 588-3670
www.lhtech.com

Morrell, Inc.
 3333 Bald Mountain Road
 Auburn Hills, MI 48326
 (248) 373-1600
www.morrellinc.com

Motion Tech Automation, Inc.
 7166 4th Street North
 Oakdale, MN 55128
 (651) 730-9010
www.motiontech.com

Northwest Motion, Inc.
 815 7th Avenue NW
 Issaquah, WA 98027
 (425) 837-9150
www.nwmotion.com

Valin (Formerly Pacific Power Tech)
 18977 NE Portal Way
 Portland, OR 97230
 (855) 797-6387
www.pacificpowertech.com

Womack Machine Supply Co.
 1417 Forestdale Boulevard
 Birmingham, AL 35214
 (205) 798-9440
www.womackmachine.com

Womack Machine Supply Co.
 13835 Senlac Drive
 Farmers Branch, TX 75234
 (800) 569-9800
www.womackmachine.com

Womack Machine Supply Co.
 1615 Yeager Avenue
 La Verne, CA 91750
 (909) 593-7304
www.womackmachine.com

Womack Machine Supply Co.
 3102 West Broadway
 Missoula, MT 59807
 (406) 728-7860
www.womackmachine.com

Womack Machine Supply Co.
 8227 South 4300 West
 West Jordan, UT 84088
 (801) 566-4333
www.womackmachine.com

GoTo Focused Delivery Program

The GoTo Focused Delivery Program streamlines everything to make it easier for you to get a selection of our most popular Rexroth products faster. You'll benefit from quicker access to product information, reliable lead times that meet or beat the expectations of the market, simplified pricing and enhanced

customer service. Go to our website at:

www.boschrexroth-us.com/GoTo for information on GoTo products from among all of Rexroth's technologies. It's the fastest and easiest way to get started on your next application.

Distributed by:

**For our complete product portfolio please visit our website at:
www.boschrexroth-us.com and select "Products and Solutions"
 or call 1.800.REXROTH (739-7684)**

GoTo Program Delivery Conditions

- Current GoTo program content and guidelines are specified at: **www.boschrexroth-us.com/GoTo**
 - How to Order: Please state clearly for each line item on the purchase order that GoTo lead times are required.
 - Orders for products exceeding the current program quantity limits may be acknowledged with extended delivery.
 - Items listed in this catalog will be shipped from your local distributor or Bosch Rexroth location within the time frame stated in this catalog. For urgent delivery requirements, please check with your local sales office.
 - Order via the Rexroth Distributors listed on the inside front cover.
- All items subject to prior sale. It is advisable to confirm critical delivery requirements at time of order. All sales subject to Bosch Rexroth Corporation Terms & Conditions of sales, which you can read at:
www.boschrexroth-us.com/terms
- Bosch Rexroth reserves the right to make program changes at any time without notice.

WARNING!

Failure, improper selection or improper use of the products and/or systems described herein or of related items may cause personal injury or property damage.

This document and other information from Bosch Rexroth Corporation and its divisions provide products and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the products or systems in Rexroth's Data Sheets. Due to the variety of operating conditions and applications for these products or systems, the user, through his own analysis and testing, is solely responsible for making the final selection of the products and systems, and assuring that all performance, safety and warning requirements are met.

The products described herein, including without limitation, product features, specifications, designs and pricing are subject to change at anytime without notice.

Table of Contents

	Page No.
Air Preparation	
Series MU1 Pressure Regulator	7
Series NL1 Air Preparation	8
Series AS2, 3 and 5 Air Preparation	9
Series NL-C (Combi) Air Preparation	10
Vacuum Products	11
Pneumatic Valves	
Series 579 Directional Control Valves	12
Series 581 ISO 5599/1 Directional Control Valves	13
Series 740 Directional Control Valves	14
Series 840 Directional Control Valves	15
Ceram™ ISO 5599/1 Directional Control Valves	16
Series AP Directional Control Valves	17
Series ST Directional Control Valves	18
Series HF03-LG Directional Control Valve Manifolds	19
Series LS04 Directional Control Valves	20
Series TC08 and TC15 Directional Control Valves	21
Series CD04 Directional Control Valves	22
Rotair® Block Directional Control Valves	23
Series ED02 and ED05 Electro-Pneumatic Pressure Control Valves	24

Liability:

In no event can the manufacturer accept warranty or liability claims for damages resulting from improper use or misuse of the equipment or as a result of changes made to the equipment other than those authorized by the manufacturer. The manufacturer will accept no claim in which non-original spare parts have been used.

©2013, Bosch Rexroth Corporation

All rights are held by ROBERT BOSCH GMBH and BOSCH REXROTH CORPORATION, also regarding patent claims.

We reserve the right to make technical changes at any time without notice. Errors and omissions expected.

Table of Contents (continued)

	Page No.
Pneumatic Actuators	
Series GSP Grippers	25
Series M Mini Cylinders	26
Series MNI Metric ISO 6432 Mini Cylinders	27
Series PRA and TRB ISO 15552 Cylinders-	28
Series RTC Rodless Cylinders	29
TaskMaster® NFPA Compatible Cylinders	30
Accessories	
Series NCT Non-Contact Transfer Units	31
Series PE5 Pressure Switches	32
Flow Controls, Fittings, Tubing and Silencers - Inch and Metric	33
Part Numbers	35

GoTo Focused Delivery Program: Series MU1

Series MU1 Pressure Regulator



Series MU1 air pressure regulators are 1/8" NPT and 1/4" NPT inch ported units. The compact design and die cast zinc body suits many different applications. Series MU1 are diaphragm type, self relieving, and three pressure ranges are offered in the GoTo program.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToMU

Features:

- Diaphragm type pressure regulator, self relieving
- Three pressure ranges available
- Detented adjustment knob
- Panel mount nut included
- 1/8" NPT gauge port (order gauge separately)
- Accessories: gauges and mounting bracket

Model Codes and Descriptions for GoTo Program:

- Series: MU1
- Type: RGS = Pressure regulator
- Ports: N018 = 1/8" NPT
N014 = 1/4" NPT
- Gauge: GAN = without Gauge
- Pressure range: 035 = 2 to 50 psi
070 = 3 to 100 psi
100 = 6 to 145 psi
- Model code example: MU1-RGS-N018-GAN-100

Technical Data:

- Ports: 1/8" NPT or 1/4" NPT
- Flow: 12.3 SCFM
- Supply pressure: 0 to 360 PSI
- Secondary pressure ranges:
 - 2 to 50 PSI
 - 3 to 100 PSI
 - 6 to 145 PSI
- Temperature range 14°F to +122°F
- Die Cast body and Buna-N(NBR) seals

GoTo Focused Delivery Program: Series NL1

Series NL1 Air Preparation



Series NL1 compact FRLs are 1/8" NPT inch ported air preparation units and are fully modular and customizable. Choose from automatic or semi automatic drains, and 5 micron and 0.01 micron filtration. The NL1 series complements the larger AS2, AS3 and AS5 family of FRL's.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToNL

Features:

- Easy to assemble, no tools required
- Pleasing color and compact dimensions
- Diaphragm type pressure regulator, self relieving
- Semi-automatic or automatic drain
- Polycarbonate bowl
- Customize your system with lockout valves, distribution blocks, filter-regulator combinations and dump valves
- See model codes for descriptions and accessories

Model Codes and Descriptions for GoTo Program:

- Series: NL1
- Type: ACD = Combination FRL, piggyback FR+L
BAV = Manual valve, lockable
DIS = Distributor block
FLC = Coalescing filter, 0.01 micron
FLS = Standard filter, 5 micron
FRE = Filter regulator, piggyback
LBM = Lubricator, micro-mist
RGS = Standard regulator
- Ports: N018 = 1/8" NPT
G018 = 1/8" BSPP
- Gauge: GAU = With gauge
- Bowl: PNB = Polycarbonate
- Drain: AO = Automatic drain (N.O.), drains w/o pressure
HO = Semi automatic drain
- Filtration: 5.00 = 5 micron
0.01 = 0.01 micron filtration, (standard on coalescing)
- Operators: 24 = 24VDC Pilot Valve
110 = 110VAC Pilot Valve
- Part specific: NC2 = 2-way (for distributor blocks)
- Mounts: MBR-...-W02 = Mounting bracket kit
MBR-...-W04 = Block assembly (joiner) kit
- Model Code Example:
NL1-FRE-N018-GAU-100-PNB-AO-05.00

Note: Not all NL1 devices are on GoTo, see index pages for a complete list of part numbers included.

Technical Data:

- Flow: 21 SCFM
- Supply pressure: 7 to 232 psi for HO drain
21 to 232 psi for AO drain
- Pressure regulation: to 145 psi
- Temperature range: 14°F to +140°F
- Filter porosity: 5 micron standard and 0.01 micron for coalescing
- Die cast body and Buna-N(NBR) seals
- Reservoir capacity: Filter 16 cm³ (0.54 U.S. Fl.oz.)
Lubricator 35 cm³ (1.18 U.S. Fl.oz.)

See index Page 35 for GoTo product and accessory part numbers.

GoTo Focused Delivery Program: Series AS

Series AS Air Preparation



The Series AS FRL family spans port sizes from 3/8" through 1" and includes individual filters, regulators and lubricators plus many other components which are modular in design, allowing both standard and custom combinations. Customize your system with lockout valves, distribution blocks, filter-regulator combinations, soft start valves, etc.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToAS

Features:

- High flow design
- Light weight and smooth outer contours by use of polymer materials
- Patented system for oil filling simplifies maintenance
- Diaphragm type pressure regulator, self relieving
- Lockable regulator knob
- Polyamide bowl guard with bayonet catch
- Semi-automatic or automatic drain
- Disassembly of individual components from the front for easy maintenance
- Accessories: mounting end plates, back plate or straps and DIN Form C connector for electric dump valve

Model Codes and Descriptions for GoTo Program:

- Series: AS2 (3/8"), AS3 (1/2"), AS5 (1")
- Type: ACD = Combination FRL, piggyback FR+L
BAV = Manual valve (lockout option)
DIS = Distributor block
FLC = Coalescing filter, 0.01 micron
FLS = Standard filter, 5 micron
FRE = Filter regulator, piggyback
LBS = Lubricator, oil drop, w/push button fill
RGS = Standard regulator
SOV = 3/2 dump valve
- Ports: N038 = 3/8" NPT G038 = 3/8" BSPP
N012 = 1/2" NPT G012 = 1/2" BSPP
N100 = 1" NPT G100 = 1" BSPP
- Gauge: GAU = With gauge
- Secondary press. for regulator:
080 = 8 bar (116 psi) in a combination unit
100 = 10 bar (145 psi) standalone unit
- Bowl: PBP = Polycarbonate, with polyamide guard
- Drain: AO = Automatic drain (N.O.), drains w/o pressure
HO = Semi automatic drain
- Filtration: 5.00 = 5 micron
0.01 = 0.01 micron filtration, (std. on coalescing)
- Operators: 24 = 24VDC Pilot Valve DO16
110 = 110VAC Pilot Valve DO16
- Part specific: LA = Lubricator auto fill (type LBS only)
NC3 = 3-way (type DIS only)
4-ST = Metal locking mechanism (BAV only)
- Mounts: MBR-...-W01 = Mounting bracket, metal
MBR-...-W03 = Mounting strap (also a joiner)
MBR-...-W04 = Block assembly (joiner) kit
MBR-...-W05 = Mtg. flange kit w/threaded ports
MBR-...-W06 = Control panel nut
- Model Code Example:
AS2-FRE-N038-GAU-080-PBP-AO-05.00

Note: Not all AS devices are on GoTo, see index pages for a complete list of part numbers included.

Technical Data:

- AS2 3/8" @ 95 SCFM; AS3 1/2" @ 183 SCFM; AS5 1" @ 511 SCFM
- Supply pressure: 7 to 232 PSI for HO drains, 21 to 232 PSI for AO drains
- Pressure regulation: to 145 PSI
- Temperature range: 14°F to +122°F
- Filter porosity: 5um standard and 0.01um for Coalescing
- Polyamide body, ABS covers and Buna-N (NBR) seals
- Reservoir capacity: Filter 28 cm³ (0.95 U.S. Fl.oz.), Lubricator 40 cm³ (1.69 U.S. Fl.oz.)

See index Pages 36-38 for GoTo product and accessory part numbers.

GoTo Focused Delivery Program: Series NL-C (Combi)

Series NL-C (Combi) Air Preparation



The Combi line consists of combination air preparation units, each providing filtration, regulation and lubrication of compressed air. Two sizes are available, with NPTF ports ranging from 1/4" through 3/4". The polycarbonate bowl—with metal bowl guard as standard—is compartmentalized, with a condensate reservoir section and separate lubricant reservoir section. A semi-automatic drain (which opens automatically upon depressurization) with manual release function and hose barb connection at the drain stem are standard.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToCombi

Features:

- All-in-one FRL design
- Includes gauge, mounting bracket and metal bowl guard
- Transparent polycarbonate bowl for ease of monitoring the levels of condensate and lubricant in the bowl
- Rugged die-cast zinc construction

Technical Data:

- Maximum Inlet Pressure: 16 bar (232 psi)
- Outlet pressure adjustment range: 0.5 to 10 bar (7 psi to 145 psi)
- Temperature range: 0°C to 50°C (32 F to 120F)
- Filter porosity: 40 micron

Two body sizes:

- Size A versions with 1/4" or 3/8" NPTF threads
- Size B versions with 1/2" or 3/4" NPTF threads

Materials of Construction:

- Die cast Zinc body
- NBR seals
- Brass drain stem
- Polycarbonate bowl
- Galvanized steel mounting bracket

GoTo Focused Delivery Program: Vacuum Products

Vacuum Products



Bosch Rexroth offers an extensive line of Vacuum Products. We are pleased to add an introductory selection of these products to our GoTo product offering. Product families represented include the EBS line of vacuum ejectors for decentralized vacuum applications powered by compressed air, the FSR line of vacuum cups for general vacuum-based product handling applications and the VFC family of inline vacuum filters for protection of vacuum components from external contaminants.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToVacuum

Features:

- EBS: Lightweight compact vacuum ejectors with push-to-connect fittings for a variety of applications
- FSR: Versatile, flexible flat vacuum cup for use with level or curved surfaces of varying roughness
- VFC: Inline vacuum filter with easily replaceable filter element

Technical Data:

- EBS: 4mm to 10mm push-to-connect interface (in GoTo); ejectors with other connection types are available
vacuum flow rates up to 215 l/min
maintains vacuum pressures over 80% of total vacuum (24" Hg gauge)
- FSR: Female threaded ports M5 - G3/8 (in GoTo); cups with other connection types are available
FSR smaller than 100mm in GoTo are capable of operation in -10°C to $+70^{\circ}\text{C}$ ambient temperature ($+14^{\circ}\text{F}$ to $+158^{\circ}\text{F}$)
100mm FSR is capable of -20°C to $+170^{\circ}\text{C}$ (-4°F to $+338^{\circ}\text{F}$)
- VFC: 80 micron particle filtration, filter element is replaceable

Please visit our international website for details and additional products:
<http://www.boschrexroth.com/pneumatics-catalog>

GoTo Focused Delivery Program: Series 579

Series 579 Directional Control Valves



The 3/2 function Series 579 directional control valve with unique poppet design offers trouble free service. Polymer body allows a rugged and corrosion resistant valve. Dove tail design allows combining of valves easily without tools. Integrated pneumatic tube fittings save time and money.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoTo579

Features:

- Designed for non-lubricated service
- Light weight
- Space savings
- Works well in either harsh or normal environments
- Locking or non-locking manual overrides
- Single or stacking valves
- Integrated push in 1/4" tube fitting
- Can be mounted on DIN rail
- Single and collectable exhaust
- Accessories: coils, electrical connectors, silencers

Model Codes and Descriptions for GoTo Program:

- Series: V579
- Type: IN = Inlet valve
STK = Stacking valve
END = End valve
SGL = Single valve
- Function: 32NC = 3/2 normally closed
- Ports: 14 = 1/4" Push-in fitting
- Voltage: 012DC = 12 VDC
024DC = 24 VDC
110VAC = 110 VAC
- Pilot: INT = Internal supply
- Model Code Example:
V579-SGL-32NC-14-024DC-INT


Note: Not all 579 valves are on GoTo, see index pages for a complete list of part numbers included.

Technical Data:

- Flow rate 0.52 C_v
- Working pressure: 29 to 116 psi @ 122° F, to 145 psi @ 104°F
- Minimum pilot pressure: 29 psi
- Working temperature: 5°F to 122° F
- Valve functions: 3/2 normally closed (in GoTo), 3/2 normally open and 5/2 SS also available
- Voltage available: 12 VDC, 24 VDC and 110 VAC (in GoTo), other voltages also available
- U.L. recognized coils
- Valve body made of polyamide
- Protection: IP65 (NEMA 4)

GoTo Focused Delivery Program: Series 581

Series 581 ISO 5599-1 Directional Control Valves



Series 581 directional control valves meet ISO 5599-1 and are interchangeable with many other manufacturers. The 581, in ISO sizes 1, 2 and 3 offers higher flow rates as compared other ISO valves within the same size. Unique spool and sleeve assembly is isolated from vibration and outside forces for long life. Construction allows field convertibility for internal or external pilot control. Valves come with CNOMO operators, **coils to be ordered separately**. Subbases also ordered separately.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoTo581

Features:

- Long service life of over 100 million cycles
- Simple to repair - unitized spool / sleeve and gasket in body repair kit
- Designed for non-lubricated service, Teflon® glide rings "loaded" by Buna-N O-Rings
- Locking / Non-locking manual overrides
- Flow control kit available for field installation
- Valves come without coils for maximum flexibility to meet a variety of applications
- Accessories: coils, NPT and ISO-G ported single subbases and manifolds, sandwich pressure regulators, electrical connector

Model Codes and Descriptions for GoTo Program:

- Series: 581 = 5599-1 ISO valve
- Size: 1 = ISO I
2 = ISO II
3 = ISO III
- Function: 1 = 5/2 2-position, single sol., spring return
2 = 5/2 2-position, double solenoid
4 = 5/3 3-position closed center
5 = 5/3 3-position open center
7 = 5/3 3-position supply center
- Operator: 7 = CNOMO single solenoid w/operator
9 = CNOMO double solenoid w/operator
- Options: 0 = Without flow controls, internal pilot
- Voltage: 0 = Without solenoid
- Electrical: 5 = CNOMO with locking/non-locking override
- Model Code Example: 581-117-005
- In addition to the valves with a 30mm CNOMO operator, one valve with a 22mm Form B operator is offered on GoTo. It is a 5/2 2-position, single sol., spring return valve less solenoid valve, Model Code 581-111-000

Note: Not all 581 valves are on GoTo, see index pages for a complete list of part numbers included.

Technical Data:

- Flow rates: ISO 1: 5/2 1.4 C_v, 5/3 1.1 C_v
ISO 2: 5/2 2.7 C_v, 5/3 2.1 C_v
ISO 3: 5/2 4.8 C_v, 5/3 4.1 C_v
- Working pressure: to 150 psi
- Working temperature: -4°F to 140°F
- Valve functions: 5/2 SS & DS, and 5/3 CC, SC, and OC for ISO 1, 2 and 3. Size 4 also available
- Voltage available: 24 VDC and 120 VAC for select valve functions, coils available for 12 VDC, 24 VDC, and 120 VAC
- Minimum pilot pressure: 5/2 SS and 5/3, 40 psi
5/2 DS, 23 PSI
- Protection: IP 65 (NEMA 4)

See index Pages 39-41 for GoTo valves, coils and other accessory part numbers.

GoTo Focused Delivery Program: Series 740

Series 740 Directional Control Valves



Unique diaphragm/poppet design directional control valve for fast response, long life and trouble free service. Polymer body results in rugged and corrosion resistant valve. Integrated pneumatic tube fittings save time and money. Use as inline valve, or assemble with snap together manifold system. Specific models with coils are available on GoTo. In addition, for inventory flexibility, a 10mm version is included in GoTo, and the coils are ordered separately. See the index pages for specific part numbers included in GoTo.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoTo740

Features:

- Expected life of over 20 million cycles
- Designed for non-lubricated service
- Works well in either harsh or normal environments
- Locking or non-locking manual overrides
- Adjustable integrated flow control in valve body
- Single solenoid valves in 24VDC and 120VAC in both standard and Corrosion Resistant (stainless steel hardware) versions
- 10mm valve available without coils for maximum flexibility to meet a variety of applications (coils available separately)
- Inline or snap together manifold system

Technical Data:

- Flow rates: 0.7 C_v
- Working pressure: 20 to 150 psi
- Working temperature: 5°F to 122°F
- Valve functions: 5/2 SS & DS (in GoTo), 5/3 CC and OC also available
- Voltage available: 12 VDC, 24 VDC and 120 VAC (12 VDC for less coil versions only)
- Minimum pilot pressure requirement: 5/2 and 5/3, 20 PSI
- Protection: IP65 (NEMA 4)

Note: Not all 740 valves are on GoTo, see index pages for a complete list of part numbers included.

GoTo Focused Delivery Program: Series 840

Series 840 Directional Control Valves



Unique poppet design directional control valve for fast response, long life and trouble free service. Polymer body results in a rugged and corrosion resistant valve. Integrated pneumatic tube fittings save time and money. Use as an inline valve, or use snap together manifold system. Series 840 valves come complete with coils. See the index pages for specific part numbers included in GoTo.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoTo840

Features:

- Designed for non-lubricated service
- Compact and lightweight (only 2.6 oz. and less than 3 cubic inches of space)
- Works well in either harsh or normal environments
- Locking or non-locking manual overrides
- Available modular wireway
- Integrated fittings for 1/4" tubing
- Inline valve or snap together manifold system
- Accessories: manifolds and additional fittings

Technical Data:

- Flow rates: 0.2 C_v
- Working pressure: 23 to 120 psi
- Working temperature: 5°F to 122°F
- Valve functions: 5/2 SS and 5/2 DS
- Voltage available: 12 VDC, 24 VDC and 120 VAC
- Minimum pilot pressure requirement: 20 psi
- Body made of polyacetal
- Protection: IP65 (NEMA 4)

Note: Not all 840 valves are on GoTo, see index pages for a complete list of part numbers included.

GoTo Focused Delivery Program: Ceram

Ceram™ ISO 5599-1 Directional Control Valves



ISO 5599-1 type valves, interchangeable with many other manufacturers. Unique ceramic plates form a nearly perfect, indestructible seal. The Ceram is more tolerant of dirty air and harsh conditions than any directional control valve available. Offers higher flow rates as compared other ISO valves within the same size. Construction allows field convertibility for internal or external pilot control. Specific models of ISO sizes 1, 2 and 3 are included in GoTo. In addition, for inventory flexibility, some ISO sizes 1 and 2 valves with CNOMO operators less coil are included in GoTo, and coils for these are ordered separately. Subbases are also ordered separately.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToCeram

Features:

- Long service life of over 150 million cycles
- Designed for non-lubricated service
- Near diamond hard ceramic sliding plates provide sealing and are guaranteed for life of the valve
- Works well in either harsh or normal environments
- Perfect for neglected air supply systems, i.e. contaminated with dirt, rust, moisture, carbon black, etc
- Locking or non-locking manual overrides
- Valves with and without coils available for maximum flexibility to meet a variety of applications
- Accessories: NPT and ISO-G single subbase and manifolds, sandwich pressure regulators and flow controls

Model Codes and Descriptions for GoTo Program:

- Series: Ceram = 5599-1 ISO valve
- Size: SZ1 = ISO I
SZ2 = ISO II
SZ3 = ISO III
- Pilot: IP = Internal pilot
- Function: SS = 5/2 2-position, single sol., spring return
DS = 5/2 2-position, double solenoid
CC = 5/3 3-position, closed center
OC = 5/3 3-position, open center
AP = Air Pilot (Size 1 only)
- Electrical: LESS COIL = CNOMO with locking/non-locking override, no coil
With coil, 24 VDC or 120 VAC
- Model Code Example:
CERAM SZ1 IP SS LESS COIL, GT-010061-00040

Note: Not all CERAM valves are on GoTo, see index pages for a complete list of part numbers included.

Technical Data:

- Flow rates: ISO 1, 1.1 C_v
ISO 2, 2.4 C_v
ISO 3, 4.3 C_v
- Working pressure: Vacuum to 150 psi
- Working temperature: 5°F to 150°F
- Valve functions: 5/2 SS & DS, and 5/3 CC and OC
- Voltages available: 24 VDC; 120 VAC
(12 VDC, 24 & 240 VAC for less coils version only)
- Minimum pilot pressure:
ISO 1 & 2: 5/2 SS & 5/2 DS, 29 psi
5/3, 44 psi
ISO 3: 5/2 SS & 5/2 DS, 36 psi
5/3, 44 psi
- Protection: IP65 (NEMA 4)
- Size 4 also available

See index Pages 43-44 for GoTo valves and accessory part numbers.

GoTo Focused Delivery Program: Series AP

Series AP Directional Control Valves



Mechanically actuated valves in poppet design with NPT or ISO G metric ports. An aluminum body makes it a rugged valve with compact dimensions. All versions have mounting holes in the body to simplify installation.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToAP

Features:

- Designed for non-lubricated service
- Compact design
- Poppet valve works well in normal and harsh environments
- Ports of 1/8"NPT on the panel mount, with Black Pushbutton or Grey Rotary Switch operators
- G1/8 ports on plunger and pushbutton versions
- Pedal operated version features 1/4" NPT ports

Technical Data:

- Flow rates: 0.25C_v (1/8")
0.60C_v (1/4")
- Working pressure: 0 to 145 psi
- Working temperature: 32°F to 176°F
- Body made of aluminum
- Valve functions and operators:
 - 3/2NC panel mount (1/8"NPT)
 - 2/2NC and 3/2NC with plunger (G1/8)
 - 3/2NC with pushbutton (G1/8)
 - 4/2 pedal operated (1/4"NPT)

Note: Not all AP valves are on GoTo, see index pages for a complete list of part numbers included.

GoTo Focused Delivery Program: Series ST

Series ST Directional Control Valves



Mechanically actuated directional control valves with ISO G metric ports. All Stainless Steel body and spool make it a rugged valve with compact dimensions, suitable for wash down applications and corrosive environments. All versions have mounting holes in the body to simplify installation.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToST

Features:

- All stainless steel design
- Compact design
- G1/8 ports

Technical Data:

- Flow rates: 0.28C_v
- Working pressure: -14 to +145 psi
- Working temperature: 5°F to 176°F
- Body and spool made of stainless steel
- G1/8 ports
- Valve functions and operators:
 - 5/2: Panel mount, Roller, and Detented Lever
 - 3/2: Roller and Plunger

Note: Not all ST valves are on GoTo, see index pages for a complete list of part numbers included.

GoTo Focused Delivery Program: Series HF03-LG

Series HF03-LG Valves and Manifolds



HF03-LG directional control valve manifold system offers lateral plug-in connection for subbases and a smooth, lightweight polymer design. The smooth surfaces are important in industries such as food and packaging. Configure complete valve manifolds online (GoTo program limitations listed below) and get a unique part number and optional CAD drawing. Manifolds are delivered pre-assembled and tested.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToHF03-LG

Features:

- Configurable to meet many applications
- D-sub connector for up to 24 coils (25-pin) or 32 coils (44-pin), or serial bus connection for up to 32 coils (limit of 24 in **GoTo**) and 48 I/O
- Low 0.35 watt power consumption for each coil
- Direct or DIN rail mounting
- Sandwich pressure regulator for #1 port available
- Field expandable by one valve subbase
- CAD files available
- Accessories: DIN rail mounting kit, silencers, individual subbases with tie rods for 5/16" tube, 1/8" NPT or G ports, blanking plate, isolator plugs, cables

Model Codes and Descriptions for GoTo Program:

- Series: HF03-LG
- Version:

11 = 25-pin D-sub conn.	45 = BDC SERCOS III
33 = ASi 8DI/8DO aux.	64 = CMS Profibus
37 = ASi 8DO	67 = CMS DeviceNet
40 = BDC Profibus	68 = CMS Ethernet I/P
41 = BDC DDL	82 = CMS DDL
- Ports: 8mm or 5/16" push-in fitting
1/8" NPT or F1/8 threads
- Override: With turn and detent manual override, all valve functions
With non-locking push manual override, valve functions identified by *
- I/O Modules: CMS 8-out, 4xM12 or 8xM8
CMS 8-in, 4xM12 or 8xM8
- Control Units: 8-out or 16-out, 25-pin D-sub; 8 out, 8xM8; 2-out, 2xM12
- Function: 5/2 2-position, single sol., spring return
5/2 2-position, double solenoid
5/2 2-position, single sol., air spring ret.
5/3 3-position closed center
2x3/2 normally closed + normally closed
2x3/2 normally open + normally open
2x3/2 normally closed + normally open
2x3/2 normally open + normally closed
Blanking plate
R-P-S Supply/Exhaust module
- Limitations: Maximum 12-stations per manifold

Technical Data:

- Flow rate: 0.7 C_v
- Pressure range: 36 to 150 psi
- Temperature range: 32°F to 122°F
- All valve functions: 2x3/2 (split spool), 5/2 SS, DS, and 5/3
- Nominal voltage: 24 VDC (-15%/+20%)
- Push-in fitting Ø 8 mm or 5/16", 1/8" NPTF or G1/8 thread connection
- External pilot for vacuum and low pressure applications optional
- Protection class: IP65 (NEMA 4)
- Other options and accessories also available

See index Pages 45-46 for GoTo valves and accessory part numbers.

GoTo Focused Delivery Program: Series LS04

Series LS04 Directional Control Valves



The extremely compact Series LS04 pneumatic is an inline directional control valve with polymer body and integrated push-in fittings. Small and light enough to mount directly to dynamic applications. The GoTo program includes specific models from the AF (all functions) and XS (extra small) versions.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToLS04

Features:

- Lightweight
- Extremely compact, narrow body (only 0.426" wide)
- Multiple mounting holes
- Fast switching times
- Integrated 1/8", 1/4", 4mm and 6mm tube fittings
- Non-locking manual overrides
- Designed for non-lubricated service
- Accessories: M8 electrical connector, silencers

Model Codes and Descriptions for GoTo Program:

- Series: LS04
- Function: 5/2SR = 5/2 2-pos. single sol., spring ret.
5/2DS = 5/2 2-position, double solenoid
3/2CC = 2x3/2 norm. closed + norm. closed
5/3CC = 5/3 3-position closed center
- Voltage: 24V = 24 VDC
- Type: AF = All function—inline, XS = Extra small inline
- Override: I = Without detent manual override
- Connection: M8 = 3-pin M8 connection
MO = 2-pin connector
- Ports: D1/8 = 1/8" push-in fitting
D1/4 = 1/4" push-in fitting
D4 = 4mm push-in fitting
D6 = 6mm push-in fitting
- Model Code Example: LS04-5/2SR-24V-AF-M8-D1/4

Note: Not all LS04 valves are on GoTo, see index pages for a complete list of part numbers included.

Technical Data:

- Flow rates: XS version 0.2 C_v
AF version 1/8", 0.25 C_v
AF version 1/4", 0.33 C_v, 6mm 0.37 C_v
- Working pressure: 44 to 116 psi
- Working temperature: 32°F to 122°F
- Port size: 1/8", 1/4", 4mm and 6mm tube connections
- Valve Functions: 2x3/2 (split spool), 5/2 SS & DS, and 5/3
- Voltage: 24 VDC with protective circuit and yellow LED
- Polyamide body
- Protection: IP65 (NEMA 4) with M8 connector

See index Page 47 for GoTo valves and accessory part numbers.

GoTo Focused Delivery Program: Series TC

Series TC08 and TC15 Valves



Compact pneumatic directional control valves with polymer body and metal threaded inserts. The GoTo program includes 1/8" (TC08) or 1/4" (TC15) valves with NPT and ISO-G porting as inline versions, and NPT only as manifold components for up to 12 stations.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToTC

Features:

- Lightweight
- Narrow body
- Multiple mounting holes
- Designed for non-lubricated service
- Works well in either harsh or clean environments
- Inline or manifold versions
- Detent manual overrides
- Accessories: external pilot end plate, single station sub-base with tie rods for expansion, DIN Form C connector

Model Codes and Descriptions for GoTo Program:

- Series: TC08 = TC08 series
TC15 = TC15 series
- Function: 2x3/2 NC/NC = dual 3/2 norm. closed/norm. closed
2x3/2 NO/NO = dual 3/2 norm. open/norm. open
2x3/2 NC/NO = dual 3/2 norm. closed/norm. open
5/2SR = 5/2 2-pos. single sol., spring ret.
5/2AS = 5/2 2-position, air spring return
5/2DS = 5/2 2-position, double solenoid
5/3CC = 5/3 3-position closed center
5/3E/C = 5/3 3-position exhaust center
5/3PC = 5/3 3-position pressure center
- Ports: N018 = 1/8" NPTF
N014 = 1/4" NPTF
G1/8 = G 1/8 (BSPP)
G1/4 = G 1/4 (BSPP)
- Voltage: 110AC = 110 VAC
024DC = 24 VDC
- Type: IP = Inline valve, internal pilot
EP = Inline valve, external pilot
MVS = Manifold valve system
- Model Code Example: TC08-5/2SR-NO18-024DC-IP

Note: Not all TC valves are on GoTo, see index pages for a complete list of part numbers included.

Technical Data:

- Flow rates: TC08, 0.8 C_v
TC15, 1.5 C_v
- Working pressure: 44 to 145 psi
- Working temperature: 14°F to 122°F
- Port size: TC08: 1/8" NPTF or G 1/8
TC15: 1/4" NPTF or G 1/4
- All valve functions: 5/2 SS & DS, and 5/3
- Voltage available: 24 VDC, 120 VAC, double air pilot
- Protection: IP65 (NEMA 4)

See index Pages 47-49 for GoTo valves and accessory part numbers.

GoTo Focused Delivery Program: Series CD04

Series CD04 Directional Control Valves



Inline pneumatic directional control valves with 1/8" PTF ports, which offer high flow in a compact valve. The GoTo program includes electrically actuated, pneumatically actuated and manually/mechanically actuated valves.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToCD04

Features:

- Compact, lightweight design
- Multiple actuation options
- Standard 22mm Form B electrical connection
- Rotatable coil
- Suitable for vacuum or dual pressure applications
- "Zero overlap" spool
- Reverse porting possible on 3-way versions
- Suitable for non-lubricated or lubricated air

Model Codes and Descriptions for GoTo Program:

- 1/8" PTF threads
- 3/2 Spring return electrical versions: 24 VDC, 110 VAC
- 5/2 Spring return electrical versions: 12 VDC, 24 VDC, 110 VAC
- 5/2 Double solenoid electrical version: 110 VAC
- 3/2 and 5/2 Single Air Pilot
- 3/2 Manual/Mechanical versions: Plunger and Roller
- 5/2 manual/Mechanical version: Roller

Note: Not all CD04 valves are on GoTo, see index pages for a complete list of part numbers included.

Technical Data:

- 1/8" PTF Port Size on GoTo (PTF = NPT short threads), G1/8 also available
- $C_v = 0.9$
- 3 and 4 Way, 2 Position on GoTo, 3 Position also available
- Electrically actuated with 12 VDC, 24 VDC, 110 VAC operators, or basic valves with no coil for other voltages
- Pneumatically actuated with single air pilot on GoTo, double air pilot also available
- Manually/mechanically actuated with roller and plunger on GoTo, pushbutton and lever actuators also available

GoTo Focused Delivery Program: Rotair®

Rotair® Block Pneumatic Directional Control Valves



Inline 4-way, 5-ported manual/mechanical pneumatic directional control valves with 1/8", 1/4", and 3/8" NPTF ports, offer high flow in a robust design. The GoTo program includes 1/4" NPTF ported valves in both 2- and 3-position spool configurations.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToRotairBlock

Features:

- Compact, robust design
- Detented handle operation
- Suitable for non-lubricated or lubricated air

Model Codes and Descriptions for GoTo Program:

- 1/4" NPTF port threads
- 5/2 detented spool configuration
- 5/3 exhaust open center spool configuration
- 5/3 closed center spool configuration

Note: Not all Rotair Block valves are on GoTo, see index pages for a complete list of part numbers included.

Technical Data:

- 1/8", 1/4", and 3/8" NPTF port sizes
- Working pressure = 0 to 150 psi
- Cv = 1.0 (1/8"), 1.1 (1/4") and 1.2 (3/8")
- Temperature range = -10°F to +175°F
- 4-way, 2- and 3- position, 5 ported spool configurations
- Detented, handle operated manual/mechanical valve
- Zinc die cast body
- 1/8" and 3/8" NPTF in 2-position, 3-position exhaust open center, and 3-position closed center spool configurations also available

GoTo Focused Delivery Program: Series ED

Series ED02 and ED05 E/P Pressure Control Valves



Direct acting poppet style, electro-pneumatic (E/P) pressure control valves with closed loop control. Use to change output pressure or force proportional with an electrical input. Compact ED02 version is only 30mm wide. Also in the GoTo program is the higher flow ED05 model.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToED

Features:

- Single M12 connection for power and input
- 0 to 10 VDC or 4 – 20 mA input control
- +/- 20% supply voltage variance (24 VDC)
- Multiple mounting holes
- Works well in either harsh or clean environments
- See catalog for performance data
- Accessories: M12 electrical connector, tie rod kits for ED02

Model Codes and Descriptions for GoTo Program:

- Series: ED
- Type: ED02 = 3.5 SCFM
ED05 = 35.3 SCFM
- Minimum pressure output: 000 = 0 bar, 0 psi
- Maximum pressure output: 000 = 10 bar, 145 psi
- Nominal input/output values: 010 = 0-10 VDC
420 = 4-20 mA
- Connection: 1M12A = M12, 5 pin
- Model Code Example: ED02-000-100-010-1M12A

Note: Not all ED02 and ED05 valves are on GoTo, see index pages for a complete list of part numbers included.

Technical Data:

- Flow rates: ED02, 3.5 SCFM
ED05, 35.3 SCFM
- Working pressure: 0 to 145 psi
- Working temperature: 32°F to 158°F
- Port size: ED02: Universal threads for 1/8" NPT or G1/8
ED05: Universal threads for 1/4" NPT or G1/4
- Air filtration: 50 micron
- Hysteresis: < 1 psi
- Protection: IP65 (NEMA 4)

GoTo Focused Delivery Program: Series GSP

Series GSP Grippers



Included in the GoTo program are selected type GSP-P parallel grippers from our Series GSP product offering. Series GSP-P grippers (size 40 and below) are compatible with the Easy-2-Combine system for assembly and handling and provide a precise, lightweight solution for handling of loads up to 9.25 pounds (mass). An internal magnet allows for gripper position sensing using Rexroth's ST4 and ST4-2P series of reed and solid state (PNP and NPN) position sensors.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToGSP

Features:

- Grip tolerance 0.02mm (0.001")
- Total gripping forces over 250 lbf possible
- Lightweight aluminum body
- Lubricated for the life of the product
- Internal magnet for position sensing
- 4mm C-slots (quantity 4 per gripper) for position sensors
- Versions for higher loads and longer strokes available

Model Codes and Descriptions for GoTo Program:

- Series: GSP
- Type: P = parallel gripper
- Size codes/recommended load mass:
 - 10 = 6mm total stroke, <0.64 lbm
 - 16 = 10mm total stroke, <1.32 lbm
 - 20 = 12mm total stroke, <2.64 lbm
 - 25 = 16mm total stroke, <4.19 lbm
 - 40 = 26mm total stroke, <9.25 lbm

Note: Not all GSP-P grippers are on GoTo, see index pages for a complete list of part numbers included.

Technical Data:

- Function: Double acting parallel gripper (no spring bias)
- Working pressure: 29 to 116 psi (2 to 8 bar)
- Working temperatures from 41°F to 140° F (5 to 60° C)
- Port size: M3 (body size 10)
M5 (body sizes 16, 20 and 25)
G1/8 (body size 40)

GoTo Focused Delivery Program: Series M

Series M Mini Cylinders



The Series M double acting mini cylinder with rolled crimp design provides durable leak proof service and long life. Threaded nose and rear clevis provides mounting and application flexibility. Can be interchanged with other manufacturers, a crossover listing is available online.

Note: For specific version/bore/stroke combinations included in GoTo program, see the full list of part numbers listed in the index pages.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToMseries

Features:

- Stainless steel cylinder body
- Die cast aluminum end caps
- Stainless steel piston rods on all GoTo bores exc. 2"
- Oil impregnated rod bushing

Model Codes and Descriptions for GoTo Program:

- Series: M = Double acting mini cylinder
- Bore size: 4 = 7/16"
5 = 9/16"
7 = 3/4"
8 = 7/8"
10 = 1-1/16"
15 = 1-1/2"
20 = 2"
- Versions: DXP = Pivot and nose mount, no pivot pin
D = Front nose mount
DP = Rear pivot mount
- Strokes: 05 = 0.50"
10 = 1.00"
15 = 1.50"
20 = 2.00"
30 = 3.00"
40 = 4.00"
50 = 5.00"
- Model Code Example: M-15DXP-10 (Note: not all version/bore/stroke combinations are included in GoTo, see index pages for a complete list of part numbers included.)

Technical Data:

- Bore sizes available: 7/16", 9/16", 3/4", 7/8", 1 1/16", 1 1/2" and 2"
- Working pressures: 23 to 250 psi
- Working temperatures: -10°F to 165°F
- Strokes from 1/2" to 5", see part number and description for specific bore/strokes included in GoTo

GoTo Focused Delivery Program: Series MNI

Series MNI Metric Mini Cylinders (ISO 6432)



The Series MNI mini-ISO cylinder conforms to ISO 6432, ensuring interchangeability between manufacturers who conform to the same standard. With stainless steel rod and barrel, anodized aluminum end covers, brass piston and Buna-N seals, it provides a rugged construction ensuring years of trouble-free operation. Included in GoTo are bore sizes range from 12mm to 25mm, with strokes 10mm, 25mm, 50mm, 80mm, 100mm and 160mm. A comprehensive array of a mounts and rod accessories are available.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToMNI

Features:

- Stainless steel cylinder body
- Die cast anodized aluminum end caps
- Stainless steel piston rod
- Brass piston
- Available with or without magnetic piston
- Buna-N seals
- Conforms to ISO 6432
- Cylinder mounting nut and piston rod nut included
- Accessories: mounting, rod clevis

Model Codes and Descriptions for GoTo Program:

- Series: MNI = Double acting mini cylinder
- Bore sizes: 012 = 12mm
016 = 16mm
020 = 20mm
025 = 25mm
- Version: Double acting
- Strokes: 10mm, 25mm, 50mm, 80mm, 100mm, 160mm
- Piston: With or without magnet

Note: Not all MNI bore and stroke sizes are on GoTo, see index pages for a complete list of part numbers included.

Technical Data:

- Bore sizes available: 12mm, 16mm, 20mm and 25mm (other bores sizes available not on GoTo)
- Working pressures: 14.5 to 145 psi
- Working temperatures: -13°F to 176°F
- Strokes available: 10, 25, 50, 80, 100mm and 160mm (other strokes available not on GoTo)
- Piston rod diameter/rod thread: 12mm & 16mm (6mm, M6), 20mm (8mm, M8), 25mm (10mm, M10 x 1.25)
- Port sizes: 12mm (M5), 16mm (M5), 20mm and 25mm (G1/8)

GoTo Focused Delivery Program: Series PRA and TRB

Series PRA and TRB ISO 15552 Cylinders



Series PRA and TRB double acting air cylinders have aluminum bodies providing a clean and robust design. The PRA is a profile (non-tie rod) version, the TRB has tie rods with a round tube. Ideal cushioning maximizes speed and load carrying capabilities. Interchangeable with many other manufacturers of ISO 15552 cylinders. Configure complete cylinders (from 32mm to 125mm bore sizes) online within limitations listed below.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToPRA

Features:

- Ideal Cushioning
- Anodized aluminum body
- Die cast aluminum end caps
- Stainless steel piston rod
- Multiple guiding accessories available
- Available with metric or inch porting/rod threads
- Adjustable cushions
- Magnetic piston for proximity switch sensing
- Switch installation on all 4 sides
- Flush proximity groove on 2 sides on PRA
- Accessories: mounting, rod clevis, proximity switches

Model Codes and Descriptions for GoTo Program:

- Series: PRA = Profile ISO cylinder
TRB = Tie rod ISO cylinder
- Function: DA = Double acting
- Bore sizes: 032 = 32mm (1-1/4")
040 = 40mm (1-1/2")
050 = 50mm (2")
063 = 63mm (2-1/2")
080 = 80mm (3-1/8")
100 = 100mm (4")
125 = 125mm (5")
- Stroke: TRB up to 500 mm; PRA up to 1000 mm,
32 – 100 mm in 1 mm increments; for inch version last digit
is 1/8" increments
- Threads: 0 = Metric, 1 = Inch
- Cushioning: 2 = With adjustable pneumatic cushioning
- Piston: 2 = With magnet
- Piston rod: 1 = Standard single rod
4 = Single, extended for HU1
5 = Single, extended for LU6
6 = Single, extended for LU1/LU2
- Seals: 1 = Standard PUR
- Scraper: 1 = Standard
- Cylinder type: BAS = Basic
- Model Code Example:
PRA-DA-050-0200-1-2-2-1-1-1-BAS,
other options as listed on configuration file (double
acting, 50mm bore, 20 inch stroke, NPT ports,
w/cushions, w/magnet, standard rod & seals)

Technical Data:

- Bore sizes from 32 to 125 mm (1 1/4" to 5")
- Working pressures from 23 to 150 psi
- Working temperatures from -4°F to 176°F
- Polyurethane seals and scraper
- Grade 431 stainless steel piston rod
- Strokes in 1mm increments up to 1000 mm, 1/8" increments up to 40"
- ISO-G (BSPP) porting and metric rod threads, or NPT porting with inch rod threads

See index Pages 54-59 for GoTo cylinders and accessory part numbers.

GoTo Focused Delivery Program: Series RTC

Series RTC Rodless Cylinders



The Series RTC rodless cylinders feature an extruded aluminum body and oval piston providing a clean and robust design. Unique shape of Inner sealing band made from stainless steel wire reinforced polyurethane provides virtually zero leakage. Stainless steel outer band protects against dirt and dust. Ideal cushioning maximizes speed and load carrying capabilities. The internal guide, compact guide and heavy duty versions are included in the GoTo program with the limitations listed below. Configure complete cylinders online. Note: not all bore sizes are available for all guide versions.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToRTC

Features:

- One piece piston and shuttle for maximum load capacity
- Oval-shaped piston for lower height and greater resistance to side load
- Anodized aluminum body and end caps
- Magnetic piston for position sensing
- Adjustable "Ideal Cushioning"
- Can be ported on one end
- Flush proximity groove on two sides
- NPT or ISO-G (BSPP) ports
- Inch or metric strokes
- Accessories: mounting, proximity switches

Model Codes and Descriptions for GoTo Program:

- Series: RTC
- Function: DA
- Bore sizes: 016 = 16mm (5/8")
025 = 25mm (1")
032 = 32mm (1-1/4")
040 = 40mm (1-1/2")
050 = 50mm (2")
063 = 63mm (2-1/2")
080 = 80mm (3")
- Stroke: 0000 = Full inch & 1/8", up to 118" *
0000 = Metric in mm, up to 3000 mm*
- Guide: BV (internally guided), RR (RexMover replacement), RI (Series 170 replacement), CG (compact guide), HD (heavy duty guide)
- Inch/Metric: I = inch, M = metric
- Mounting: M00 = Without mounting
MF1 = End cover mounting
M40 = End cover & foot mounting
M41 = Foot mounting
- Shuttle: S00 = Without mounting
S42 = Angle bracket
S44 = Articulating mounting
- Ports: B = BSPP (ISO-G); 5 = M5, 7 = M7, N = NPT (options 5 and 7 are for 16mm bore size only)
- Lubrication: L = Low speed
- Seals: P = Polyurethane
- Sensors: 00 = Without
RA3 = ST4 reed, 3 meter PUR cable
RB3 = ST4 reed, 0.8 meter PUR cable, type B
PA3 = ST4 PNP, 3 meter PUR cable
PB3 = ST4 PNP, 0.8 meter PUR cable, type B
NA3 = ST4 NPN, 3 meter PUR cable
NB3 = ST4 NPN, 0.8 meter PUR cable, type B
- Cushions: P0 – Adjustable pneumatic
F1-F6 – Fixed position, hyd. shock absorbers
H1-H6 – Adj. position, hyd. shock absorbers
- Model Code Example:
RTC-DA-032-1000-BV-MM00S00BLP000P0P0,
32 bore, 1000mm stroke, internal guide, metric ports, no mount, w/o shuttle mount, ISO G ports, low speed grease, polyurethane seals, no sensors, cushioned both ends
- * **Note:** 3000 mm (118") max. stroke not available in all bore sizes and guide versions.

Technical Data:

- Bore sizes from (16 to 80 mm) 5/8" to 3"
- Working pressure: 30 to 120 psi; Working temperatures: 14°F to 140°F
- Velocities: up to 21 ft/sec, varies by bore size
- Online sizing tool to verify application requirements

See index Pages 60-61 for GoTo cylinders and accessory part numbers.

GoTo Focused Delivery Program: TaskMaster

TaskMaster® Pneumatic Cylinders



TaskMaster TM8 cylinders are NFPA dimensionally compatible*, lightweight double acting aluminum air cylinders with a clean profile aluminum body. Bore sizes from 1 1/2" to 4" are available on the GoTo program with limitations listed below. Many standard cylinders are listed in the index pages, others can be configured cylinders online within the parameters shown below.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToTaskMaster

Features:

- Smooth head and cap design eliminates gathering of foreign material
- Hard anodized extruded aluminum tube for lightweight, high strength, & maximum corrosion resistance
- Rod cartridge can be removed without disassembly of cylinder
- Twelve popular NFPA mounting options available
- Three integral mounts (head, cap and MS4), plus ten additional NFPA mountings available
- Magnetic piston for position sensing
- Ports at position 1, Cushions at position 2
- KK2 male rod thread
- Accessories: mounting, clevis rod ends and proximity switches

Model Codes and Descriptions for GoTo Program:

- Series: TMT = TaskMaster, NFPA compatible TM8*
- Bore sizes/rod size/KK2 thread:
 - 1-1/2", 0.625, 1/2-20M
 - 2", 0.625, 1/2-20M
 - 2-1/2", 0.625, 1/2-20M
 - 3-1/4", 1.00", 7/8-14M
 - 4", 1.00", 7/8-14M
- Stroke: 1" to 26" in 1/8" increments
- Mount: STD = Single rod
- Head & Cap: Ports in Position 1 (NPT)
 - C = Cushion position 2 (both ends)
 - Blank = no cushions
- Rod material: STD = High strength steel, chrome plated
- Seals: STD = Buna
- Rod thread: A = Standard
- Thread length: W = Standard
- Mount: MS4 = Standard
- Model Code Example:
 - 2x8.125 CSTD-TMTC 0.625 7/16-20M,
 - other options as listed on configuration file
 - (2" bore, 8-1/8" stroke, cushioned both ends)

Technical Data:


- 1.5" – 4" bore sizes, NPT porting
- Pressure rating: 200 psi
- Temperature range: 0°F to 160°F
- Teflon-coated piston, polyurethane rod seals plus factory pre-lubrication.
- Chrome plated steel piston rod, 1" size is case hardened
- Pressure loaded double lip rod seal/ wiper
- Graphite rod bearing
- Stroke lengths up to 26 inches on GoTo

*"A" and "W" dimensions in most cases are slightly different than NFPA standard, ports are 1/8" less than NFPA standard.

See index Pages 61-63 for GoTo cylinders and accessory part numbers.

GoTo Focused Delivery Program: Series NCT

Series NCT Non-Contact Transfer Units

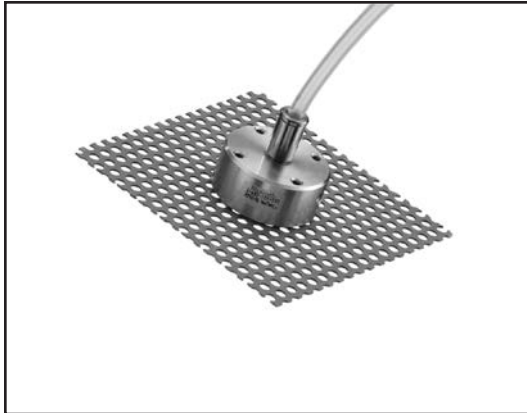

The NCT is used to lift porous, rough or delicate objects – many application where vacuum products do not suffice. It does not need to create a perfect seal like vacuum cups to lift objects. Instead, the NCT uses lifting force developed by positive airflow (Bernoulli principle) to handle components, with no vacuum generator required.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToNCT

Features:

- Four sizes: 20, 30, 40 and 60mm diameters
- Reduce air consumption by optimizing air requirements
- Lifting capacity up to 2 pounds each (60mm), combine multiple units to lift and move heavier loads
- Aluminum body with stainless steel center
- Replaceable silicone friction pads
- Center or side porting
- Mounting holes for installation of user tooling
- Examples of objects NCT can handle: porous, rough surfaces, delicate, sensitive, hot or cold, food, bags, film, irregular shapes, dirty, dusty or wet objects

Technical Data:

Series	Lift force (lbs) @ 73psi	Air consumption (scfm)	Diameter in. (mm)	Working Pressure PSI	Temperature Range °F	Port Size
NCT20	0.20	3.53	0.79 (20)	15 to 105	14 to 122	M5 (10-32)
NCT30	0.29	3.53	1.18 (30)			
NCT40	0.45	3.88	1.57 (40)			
NCT60	1.35	7.42	2.36 (60)			

Note: Lift force is higher when used above 73 psi (105 psi maximum), and when multiple units are used.

GoTo Focused Delivery Program: Series PE5

Series PE5 Pressure and Vacuum Switch



The Series PE5 piezoresistive pressure sensor unit with analog and or digital outputs can be mounted to NL1, AS2, AS3 or AS5 distribution blocks or used stand-alone. They can measure PSI, bar, kPa, or inHg. Pressure, vacuum and transducer variants are available.

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToPE5

Features:

- Single M12 connection for power and outputs
- Large, easy-to-read LCD
- Integrated DIN rail clip
- Adjustable hysteresis
- Works well in either harsh or clean environments
- Accessories: M12 electrical connector, wall mount bracket, fittings

Model Codes and Descriptions for GoTo Program:

- Series: PE5 = Pressure switch, electronic
- Output: P2 = 2 x PNP
PP = 1 x PNP + 1 x analog
- Ports: DA04 = 4mm (5/32") push-in fitting
G014 = G1/4 (BSPP)
- Min. pressure sensed: 000 = 0 bar, 0 psi
V10 = -1 bar/-14.5 psi
- Max. pressure sensed: 000 = 0 bar, 0 psi
100 = 10 bar, 145 psi
- Connection: M012 = M12 connection, 4 pin
- Model Code Example:
PE5-P2-G014-000-100-M012

Note: Not all PE5's are on GoTo, see index pages for a complete list of part numbers included.

Technical Data:

- Working pressure: Vacuum, 0 to 145 psi
- Working temperature: 32°F to 140°F
- Port size: 4mm (5/32") push-in fitting
G1/4 (BSPP)
- Supply voltage: 17 to 30 VDC
- Switching time: < 5 ms
- Repeatability: +/- 2%
- Protection: IP65 (NEMA 4)

GoTo Focused Delivery Program: Series QR1

Flow Controls, Fittings, Tubing & Silencers (Inch & Metric)



Pneumatic fittings, pipe adapters (metric to inch) and tubing as well as silencers, right angle flow controls and other functional fittings compose Rexroth's pneumatic connectivity offering within the GoTo program. Series QR1 push-in fittings for pneumatic tubing are available in the GoTo program with threads M5, 10-32 UNF and 1/8 - 1/2" NPT and BSPP formats and push-in connections for tubing of diameters 1/8" through 1/2" and 6mm to 12mm. QR1 fittings are priced per piece but must be ordered in package quantity multiples as shown in the descriptions in the catalog index. Pneumatic tubing in a variety of sizes and colors, right angle flow controls with push-in or thread-only connections and silencers are now included in the GoTo program..

For complete engineering and design information:
GoTo www.boschrexroth-us.com/GoToQR1

Features:

- Oval shaped release ring makes QR1 easier to use than fitting with standard round shaped rings
- Lightweight, space saving, polymer design
- Economically priced
- Thread sealant on NPT threads saves installation time
- Nickel plated brass threads
- Stainless steel internal locking ring
- Optimum sealing with captive o-ring
- Styles include straights, elbows, tees, Ys, reducers, bulkheads, blanking plugs and elbow flow controls
- Tubing available as an accessory in 1/8", 5/32" (4mm), 1/4", 5/16" (8mm), 3/8", 1/2", 6mm, 10mm and 12mm

Model Codes and Descriptions for GoTo Program:

- Series: QR1, inch version
- Type: DWA = Elbow flow control
 RBS = Blanking plug
 RED = Reducer, straight push-in
 RMT = Plug connector reducing 3-fold
 RPN = Straight tube to male
 RSK = Union connector, straight
 RSM = Bulkhead union
 RSR = Reducing union
 RTK = Tee tube to tube
 RVK = Elbow union
 RVT = Male elbow, thread/push-in
 RY2 = Y – push-in
 RYK = Y – tube to tube
- Tube: D532 = 5/32" O.D. 006 = 6mm O.D.
 D014 = 1/4" O.D. 010 = 10mm O.D.
 D018 = 1/8" O.D. 012 = 12mm O.D.
 D516 = 5/16" O.D. BU = Blue
 D038 = 3/8" O.D. NT = Natural translucent
 D012 = 1/2" O.D. 105 = 1.05mm wall
 125 = 1.25mm wall
 150 = 1.50mm wall
- Threads: 1032 = 10-32 UNF M005 = M5 x 0.8mm
 N018 = 1/8" NPT G018 = G1/8 (BSPP)
 N014 = 1/4" NPT G014 = G1/4 (BSPP)
 N038 = 3/8" NPT G038 = G3/8 (BSPP)
 N012 = 1/2" NPT G012 = G1/2 (BSPP)
- Model Code Example:
 QR1-DWA-D014-N018,
 (elbow flow control, 1/4" tube, 1/8" NPT)

Technical Data:

Fittings:



- Pressure range: 95% vacuum to 150 psi
- Temperature range: 32°F to 140°F
- Release ring – POM
- Tooth lock washer – stainless steel
- Housing – Polymer (Polybutylene Terephthalate)
- Form ring – Buna-N
- Threads – nickel plated brass
- Flow control body – nickel plated brass

Tubing:

- Pressure range: 95% vacuum to 150 psi
- Temperature range: -22°F to 175°F (TU1 series)
 -40°F to 165°F (other)
- Materials: Polyurethane

See index Pages 64-68 for GoTo product (plus package quantities) and accessory part numbers.

GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
				
	Series MU1 Pressure Regulator			
7	MU1-RGS-N014-GAN-035 1/4" NPT regulator, 50 PSI	R432002643	5	1
7	MU1-RGS-N014-GAN-070 1/4" NPT regulator, 100 PSI	R432002644	5	1
7	MU1-RGS-N014-GAN-100 1/4" NPT regulator, 145 PSI	R432002645	5	1
7	MU1-RGS-N018-GAN-035 1/8" NPT regulator, 50 PSI	R432002640	5	1
7	MU1-RGS-N018-GAN-070 1/8" NPT regulator, 100 PSI	R432002641	5	1
7	MU1-RGS-N018-GAN-100 1/8" NPT regulator, 145 PSI	R432002642	5	1
7	PG1-ROB-N018-SAS-D40-P0-100PSI 100 PSI gauge	R412010062	5	1
7	PG1-ROB-N018-SAS-D40-P0-160PSI 160 PSI gauge	R412010063	5	1
7	PG1-ROB-N018-SAS-D40-P0-200PSI 200 PSI gauge	R412010064	5	1
				
	Series NL1 Air Preparation			
8	NL1-ACD-N018-GAU-100-PNB-AO-05 1/8" FRL, 5 micron, float drain	R432002532	5	1
8	NL1-ACD-N018-GAU-100-PNB-HO-05 1/8" FRL, 5µ, semi-auto drain	R432002531	5	1
8	NL1-BAV-G018 1/8" BSPP ball valve	0821300772	2	1
8	NL1-BAV-N018 1/8" ball valve	R432002528	5	1
8	NL1-DIS-N018-NC2 1/8" porting block	R432002648	5	1
8	NL1-FLC-G018-PNB-HO-00.01 1/8" BSPP coalescing filter, 0.01µ, semi-auto drain	0821303716	2	1
8	NL1-FLC-N018-PNB-HO-00.01 1/8" coalescing filter, 5µ, semi-auto drain	R432002520	5	1
8	NL1-FLS-G018-PNB-HO-05 1/8" BSPP filter, 5µ, semi-auto drain	0821303710	2	1
8	NL1-FLS-N018-PNB-AO-05.00 1/8" filter, 5 micron, float drain	R432002509	5	1
8	NL1-FLS-N018-PNB-HO-05.00 1/8" filter, 5 micron, semi-auto drain	R432002508	5	1
8	NL1-FRE-G018-GAU-100-PNB-HO-05 1/8" BSPP filter-regulator, 5µ, semi-auto drain	0821300750	2	1
8	NL1-FRE-N018-GAU-100-PNB-AO-05 1/8" filter-regulator, 5µ, float drain	R432002495	5	1
8	NL1-FRE-N018-GAU-100-PNB-HO-05 1/8" filter-reg., 5µ, semi-auto drain	R432002492	5	1
8	NL1-LBM-G018-PNB 1/8" BSPP micro-mist lubricator	0821301702	2	1
8	NL1-LBM-N018-PNB 1/8" micro mist lubricator	R432002529	5	1
8	NL1-MBR-X000-W02 Mounting bracket for NL1-RGS, -FRE	1821331013	5	1
8	NL1-MBR-X000-W03 Mounting bracket kit (max 1 per assembly)	1821336024	5	1
8	NL1-MBR-X000-W04 NL1 modular joiner kit	1827009636	5	1
8	NL1-MBR-X000-W06 Mounting nut for NL1-RGS, -FRE, brass	1829234070	5	1
8	NL1-RGS-G018-GAU-100 1/8" BSPP regulator 145 PSI with gauge	0821302730	2	1
8	NL1-RGS-N018-GAU-100 1/8" regulator, 145 PSI	R432002489	5	1
8	NL1-SOV-N018-024 1/8" dump valve, 24V DC	R432002651	5	1
8	NL1-SOV-N018-110 1/8" dump valve, 110V AC	R432002652	5	1




GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
	 Series AS2, AS3, and AS5 Air Preparation			
9	AS2-ACD-N038-GAU-080-PBP-AO-05 3/8" FRL, 5 micron, float drain	R432000699	5	1
9	AS2-ACD-N038-GAU-080-PBP-HO-05 3/8" FRL, 5 micron, semi-auto drain	R432000698	5	1
9	AS2-BAV-G038-MAN 3/8" BSPP ball valve	R412006257	2	1
9	AS2-BAV-N038-MAN-4-ST 3/8" NPT ball valve	R432002359	5	1
9	AS2-DIS-G038-NC3 3/8 BSPP porting block	R412006251	5	1
9	AS2-DIS-N038-NC3 3/8" NPT AS2 porting block	R432000659	5	1
9	AS2-FLC-G038-PBP-HO-00.01 3/8" BSPP coalescing filter, 0.01μ, semi-auto drain	R412006045	2	1
9	AS2-FLC-N038-PBP-HO-00.01 3/8" coalescing filter, 0.01μ, semi-auto drain	R432000530	5	1
9	AS2-FLS-G038-PBP-HO-05 3/8" BSPP filter, 5μ, semi-auto drain	R412006009	2	1
9	AS2-FLS-N038-PBP-AO-05 3/8" NPT filter, 5 micron, float drain	R432000507	5	1
9	AS2-FLS-N038-PBP-HO-05 3/8" NPT filter, 5 micron, semi-auto drain	R432000506	5	1
9	AS2-FRE-G038-GAU-080-PBP-HO-05 3/8" BSPP filter-regulator, 5μ, semi-auto drain	R412006209	2	1
9	AS2-FRE-N038-GAU-080-PBP-AO-05 3/8" filter-regulator, 5μ, float drain	R432000645	5	1
9	AS2-FRE-N038-GAU-080-PBP-HO-05 3/8" filter-reg., 5μ, semi-auto drain	R432000644	5	1
9	AS2-LBS-G038-PBP-LA 3/8" BSPP oil-drop lubricator	R412006231	2	1
9	AS2-LBS-N038-PBP-LA 3/8" NPT oil-drop lubricator	R432000654	5	1
9	AS2-MBR-G014-W05 Mounting flange kit 1/4" BSPP	R412006366	5	1
9	AS2-MBR-G038-W05 Mounting flange kit 3/8" BSPP	R412006367	5	1
9	AS2-MBR-N014-W05 Mounting flange kit 1/4" NPT	R432000729	5	1
9	AS2-MBR-N038-W05 Mounting flange kit 3/8" NPT	R432000730	5	1
9	new AS2-MBR-X000-W01-NPT Mounting bracket kit (for 1 or more modules)	R432031071	5	1
9	AS2-MBR-X000-W03 Mounting strap kit (for 2 or more modules)	R412006370	5	1
9	AS2-MBR-X000-W04 Joiner kit (for 2 or more modules)	R412006371	5	1
9	AS2-MBR-X000-W06 Panel mount nut (for regulator/filter-regulator)	R412006372	6	2
9	AS2-RGS-G038-GAU-100 3/8" BSPP regulator 10 bar with gauge	R412006121	2	1
9	AS2-RGS-N038-GAU-100 3/8" NPT regulator	R432000581	5	1
9	AS2-SOV-G038-024 3/8" BSPP dump valve, 24V DC	R412006269	2	1
9	AS2-SOV-N038-024 3/8" NPT dump valve, 24V DC	R432000673	5	1
9	AS2-SOV-N038-110 3/8" NPT dump valve, 110V AC	R432000674	5	1
9	AS2-SSV-G038-FIA 3/8" BSPP soft start valve	R412006273	2	1
9	AS2-SSV-N038-FIA 3/8" NPT soft start valve	R432000677	5	1
9	AS3-ACD-N012-GAU-080-PBP-AO-05 1/2" FRL, 5 micron, float drain	R432002009	5	1
9	AS3-ACD-N012-GAU-080-PBP-HO-05 1/2" FRL, 5 micron, semi-auto drain	R432002008	5	1
9	AS3-BAV-G012-MAN 1/2" BSPP ball valve	R412007261	2	1
9	AS3-BAV-N012-MAN 1/2" NPT ball valve	R432002176	5	1
9	AS3-DIS-G012-NC3 1/2 BSPP porting block	R412007251	5	1
9	AS3-DIS-N012-NC4 1/2" NPT porting block	R432002004	5	1


GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
9	AS3-FLC-G012-PBP-HO-00.01 1/2" BSPP coalescing filter, 0.01μ, semi-auto drain	R412007045	2	1
9	AS3-FLC-N012-PBP-HO-00.01 1/2" coalescing filter, 0.01μ, semi-auto drain	R432001921	5	1
9	AS3-FLS-G012-PBP-HO-05 1/2" BSPP filter, 5μ, semi-auto drain	R412007009	2	1
9	AS3-FLS-N012-PBP-AO-05 1/2" NPT filter, 5 micron, float drain	R432001907	5	1
9	AS3-FLS-N012-PBP-HO-05 1/2" NPT filter, 5 micron, semi-auto drain	R432001906	5	1
9	AS3-FRE-G012-GAU-080-PBP-HO-05 1/2" BSPP filter-regulator, 5μ, semi-auto drain	R412007209	2	1
9	AS3-FRE-N012-GAU-080-PBP-AO-05 1/2" filter-reg, 5 micron, float drain	R432001992	5	1
9	AS3-FRE-N012-GAU-080-PBP-HO-05 1/2" filter-reg, 5μ, semi-auto drain	R432001991	5	1
9	AS3-LBS-G012-PBP-LA 1/2" BSPP oil-drop lubricator	R412007231	2	1
9	AS3-LBS-N012-PBP-LA 1/2" NPT oil-drop lubricator	R432002002	5	1
9	AS3-MBR-G012-W05 Mounting flange kit 1/2" BSPP	R412007367	5	1
9	AS3-MBR-G038-W05 Mounting flange kit 3/8" BSPP	R412007366	5	1
9	AS3-MBR-N012-W05 Mounting flange kit 1/2" NPT	R432002018	5	1
9	AS3-MBR-N038-W05 Mounting flange kit 3/8" NPT	R432002017	5	1
9	new AS3-MBR-X000-W01-NPT Mounting bracket kit (for 1 or more modules)	R432031072	5	1
9	AS3-MBR-X000-W03 Mounting strap kit (for 2 or more modules)	R412007370	5	1
9	AS3-MBR-X000-W04 Joiner kit (for 2 or more modules)	R412007371	5	1
9	AS3-MBR-X000-W06 Panel mount nut (for regulator/filter-regulator)	R412007372	5	1
9	AS3-RGS-G012-GAU-100 1/2" BSPP regulator 10 bar with gauge	R412007121	2	1
9	AS3-RGS-N012-GAU-100 1/2" regulator	R432001953	5	1
9	AS3-SOV-G012-024 1/2" BSPP dump valve, 24V DC	R412007269	2	1
9	AS3-SOV-N012-024 1/2" dump valve, 24V DC	R432002184	5	1
9	AS3-SOV-N012-110 1/2" dump valve, 110V AC	R432002185	5	1
9	AS3-SSV-G012-FIA 1/2" BSPP soft start valve	R412007273	2	1
9	AS3-SSV-N012-FIA 1/2" NPT soft start valve	R432002188	5	1
9	AS5-ACD-N100-GAU-080-PBP-AO-05 1" FRL, 5 micron, float drain	R432002707	5	1
9	AS5-ACD-N100-GAU-080-PBP-HO-05 1" FRL, 5 micron, semi-auto drain	R432002708	5	1
9	AS5-BAV-G100-MAN 1" BSPP ball valve	R412009261	2	1
9	AS5-BAV-N100-MAN 1" NPT ball valve	R432002727	5	1
9	AS5-DIS-G100-NC3 1" BSPP porting block	R412009251	5	1
9	AS5-DIS-N100-NC2 AS5 porting block	R432002730	5	1
9	AS5-FLC-G100-PBP-HO-00.01 1" BSPP coalescing filter, 0.01μ, semi-auto drain	R412009045	2	1
9	AS5-FLC-N100-PBP-HO-00.01 1" coalescing filter, 0.01μ, semi-auto drain	R432002742	5	1
9	AS5-FLS-G100-PBP-HO-05 1" BSPP filter, 5μ, semi-auto drain	R412009009	2	1
9	AS5-FLS-N100-PBP-AO-05.00 1" filter, 5 micron, float drain	R432002763	5	1
9	AS5-FLS-N100-PBP-HO-05.00 1" filter, 5 micron, semi-auto drain	R432002765	5	1
9	AS5-FRE-G100-GAU-080-PBP-HO-05 1" BSPP filter-regulator, 5μ, semi-auto drain	R412009209	2	1
9	AS5-FRE-N100-GAU-080-PBP-AO-05 1" filter-reg, 5 micron, float drain	R432002804	5	1
9	AS5-FRE-N100-GAU-080-PBP-HO-05 1" filter-reg, 5μ, semi-auto drain	R432002805	5	1
9	AS5-LBS-G100-PBP-LA 1" BSPP oil-drop lubricator	R412009231	2	1

GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
9	AS5-LBS-N100-PBP-LA 1" NPT oil-drop lubricator	R432002813	5	1
9	AS5-MBR-G034-W05 Mounting flange kit 3/4" BSPP	R412009366	5	1
9	AS5-MBR-G100-W05 Mounting flange kit 1" BSPP	R412009367	5	1
9	AS5-MBR-N034-W05 Mounting flange kit 3/4" NPT	R432002817	5	1
9	AS5-MBR-N100-W05 Mounting flange kit 1" NPT	R432002818	5	1
9	new AS5-MBR-X000-W01-NPT Mounting bracket kit (for 1 or more modules)	R432031073	5	1
9	AS5-MBR-X000-W03 Mounting strap kit (for 2 or more modules)	R412009370	5	1
9	AS5-MBR-X000-W04 Joiner kit (for 2 or more modules)	R412009371	5	1
9	AS5-MBR-X000-W06 Panel mount nut (for regulator/filter-regulator)	1829234071	5	1
9	AS5-RGS-G100-GAU-100 1" BSPP regulator 10 bar with gauge	R412009121	2	1
9	AS5-RGS-N100-GAU-100 1" NPT regulator	R432002883	5	1
9	AS5-SOV-G100-024 1" BSPP dump valve, 24V DC	R412009269	2	1
9	AS5-SOV-N100-024 1" NPT dump valve, 24V DC	R432002891	5	1
9	AS5-SOV-N100-110 1" NPT dump valve, 110V AC	R432002892	5	1
9	AS5-SSV-G100-FIA 1" BSPP soft start valve	R412009273	2	1
9	AS5-SSV-N100-FIA 1" NPT soft start valve	R432002910	5	1
9	Silencer for AS5 ball valve, 3/4" NPT, metal threaded	R432012059	10	1
9	Silencer for AS5 dump valve, 3/8" NPT, metal threaded	R432012058	10	1
				
	Series NL-C (Combi) Air Preparation			
10	Size "A" Combi with 1/4" NPTF Ports	0821300054	5	1
10	Size "A" Combi with 3/8" NPTF Ports	0821300055	5	1
10	Size "B" Combi with 1/2" NPTF Ports	0821300064	5	1
10	Size "B" Combi with 3/4" NPTF Ports	0821300065	5	1
				
	Vacuum Products			
11	EBS Inline Vacuum Ejector 4mm ø supply, 4mm ø vacuum	R412007448	3	1
11	EBS T-Form Vacuum Ejector 6mm ø supply, 8mm ø vacuum	R412007452	3	1
11	EBS T-Form Vacuum Ejector 8mm ø supply, 10mm ø vacuum	R412007454	3	1
11	FSR vacuum cup, 100mm diameter, G3/8 female thread connection	7321000000	3	1
11	FSR vacuum cup, 30mm diameter, M5 female thread connection	7320301000	3	1
11	FSR vacuum cup, 50mm diameter, G1/8 female thread connection	7320501000	3	1
11	FSR vacuum cup, 75mm diameter, G1/4 female thread connection	7320751000	3	1
				
	Series 579 Valves			
12	VFC Inline vacuum filter, G1/4 female thread connection	0821305182	3	1
12	579 3/2 End NC 12VDC 1/4": 3/2 normally closed end valve	5792500310	5	1
12	579 3/2 End NC 24VDC 1/4" : 3/2 normally closed end valve	5792500320	5	1


GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
12	579 3/2 Inlet NC 12VDC 1/4": 3/2 normally closed inlet valve	5790400310	5	1
12	579 3/2 Inlet NC 24VDC 1/4": 3/2 normally closed inlet valve	5790500320	5	1
12	579 3/2 Single valve NC 110VAC 1/4" : 3/2 normally closed	5794405370	5	1
12	579 3/2 Single valve NC 24VDC 1/4" : 3/2 normally closed	5794400320	5	1
12	579 3/2 Stacking NC 12VDC 1/4": 3/2 normally closed stacking valve	5791500310	5	1
12	579 3/2 Stacking NC 24VDC 1/4": 3/2 normally closed stacking valve	5791500320	5	1
12	Exhaust port silencer for 579 NC valve, 1/ pack	5790005312	5	1
12	Form C connector, 120 VAC lighted, no cable, for 579, 840 and TC valves	R432011981	10	1
12	Form C connector, 24VDC lighted, no cable, for 579, 840 and TC valves	R432011982	10	1
12	Form C connector, 250VAC/300VDC non lighted, no cable, 579, 840, TC	8941012202	10	1
12	Kit, 1/2 conduit connector for 579 valve	R432008830	5	1
12	Kit, end cap & wireway assembly, for 579 valve	R432008829	5	1
12	Kit, wireway segment, for 579 valve	R432008679	8	3
12	M5 Sintered silencer for 579 pilot (order multiple is 10 pcs.)	1827000006	10	1
				
	Series 581 ISO 5599/1 Valves			
13	new 581 size 1 5/2 double solenoid without coil, 22mm operator V581-5/2DS-NONE-I1-2P22-HBX-PA-X-C-T0	5811220000	5	1
13	new 581 size 1 5/3 closed center 24VDC, 22mm operator V581-5/3CC-024DC-I1-2P22-HB1-PA-X-C-T0	5811420110	5	1
13	new 581 size 2 5/2 double solenoid without coil, 22mm operator V581-5/2DS-NONE-I2-2P22-HBX-PA-X-C-T0	5812220000	5	1
13	new 581 size 2 5/2 single solenoid 110VAC, 22mm operator V581-5/2SR-110AC-I2-1P22-HB1-PA-X-C-T0	5812110310	5	1
13	new 581 size 2 5/2 single solenoid without coil, 22mm operator V581-5/2SR-NONE-I2-1P22-HBX-PA-X-C-T0	5812110000	5	1
13	new 581 size 2 5/3 closed center 24VDC, 22mm operator V581-5/3CC-024DC-I2-2P22-HB1-PA-X-C-T0	5812420110	5	1
13	new 581 size 2 5/3 closed center without coil, 22mm operator V581-5/3CC-NONE-I2-2P22-HBX-PA-X-C-T0	5812420000	5	1
13	581-1 CC CNOMO INT w/o FC,SOL,CONN : 149005, 5/3 closed ctr.	5811490050	5	1
13	581-1 DS CNOMO INT w/o FC,SOL,CONN : 129005, 5/2 double sol.	5811290050	5	1
13	581-1 OC-CNOMO INT w/o FC,SOL,CONN : 159005, 5/3 open center	5811590050	5	1
13	581-1 PC CNOMO INT w/o PILOT,FC,SOL,CONN:178000, 5/3 supp. ctr.	5811780000	5	1
13	581-1 PC-CNOMO INT w/o FC,SOL,CONN : 179005, 5/3 supply center	5811790050	5	1
13	581-1 SS 22mm INT w/o FC, SOL, CONN : 111000, 5/2 single sol.	5811110000	5	1
13	581-1 SS CNOMO INT w/o FC,SOL,CONN : 117005, 5/2 single sol.	5811170050	5	1
13	581-1 SS CNOMO INT w/o FC,SOL,CONN : 117035, 5/2 sgl. sol., 110 VAC	5811170350	5	1
13	581-1 SS CNOMO INT w/o FC,SOL,CONN : 117065, 5/2 sgl. sol., 24 VDC	5811170650	5	1
13	581-2 CC CNOMO INT w/o FC,SOL,CONN : 249005, 5/3 closed center	5812490050	5	1
13	581-2 DS CNOMO INT w/o FC,SOL,CONN : 229005, 5/2 double sol.	5812290050	5	1
13	581-2 OC CNOMO INT w/o FC,SOL,CONN : 259005, 5/3 open center	5812590050	5	1
13	581-2 PC CNOMO INT w/o FC,SOL,CONN : 279005, 5/3 supply center	5812790050	5	1


GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
13	581-2 SS CNOMO INT w/o FC,SOL,CONN : 217005, 5/2 single sol.	5812170050	5	1
13	581-3 CC CNOMO INT w/o FC,SOL,CONN : 349005, 5/3 closed ctr.	5813490050	5	1
13	581-3 DS CNOMO INT w/o FC,SOL,CONN : 329005, 5/2 double sol.	5813290050	5	1
13	581-3 OC CNOMO INT w/o FC,SOL,CONN : 359005, 5/3 open ctr.	5813590050	5	1
13	581-3 PC CNOMO INT w/o FC,SOL,CONN : 379005, 5/3 supply center	5813790050	5	1
13	581-3 SS CNOMO INT w/o FC,SOL,CONN : 317005, 5/2 single sol.	5813170050	5	1
13	Coil 22mm form B 110 VAC coil, 50/60 Hz	1824210237	10	1
13	Coil 22mm form B 24 VDC coil, 4.8 W	1824210243	10	1
13	Coil 22mm form B Industry 110 VAC coil, 50 Hz	0498317103	10	1
13	Coil 22mm form B Industry 24 VDC coil, 5 W	0498317502	10	1
13	Coil form A 110 VAC coil, 50/60 Hz	5428457072	10	1
13	Coil form A 12 VDC coil, Series 581	R432011988	10	1
13	Coil form A 120 VAC coil, Series 581	R432011985	10	1
13	Coil form A 24 VAC coil, Series 581	R432011990	10	1
13	Coil form A 24 VDC coil, 2.1 W	5420507022	10	1
13	Coil form A 24 VDC coil, Series 581	R432011989	10	1
13	Coil form A 240 VAC coil, Series 581	R432011986	10	1
13	Form A Din connector, 120 VAC lighted, no cable	1834484102	10	1
13	Form A Din connector, 120 VAC lighted, no cable, 1/2" Conduit	R432008421	10	1
13	Form A Din connector, 120 VAC lighted, no cable, Series 581	R432013726	15	2
13	Form A Din connector, 12VDC lighted, no cable, Series 581	R432013729	15	2
13	Form A Din connector, 24VDC lighted, no cable, Series 581	R432013730	15	2
13	Form A Din connector, non lighted, no cable, 1/2" Conduit	R432015626	15	2
13	Form A Din connector, non lighted, no cable, Series 581	8941000302	10	1
13	ISO1 End plate kit, 3/8"NPT, Series 581 Valve	R432015316	5	1
13	ISO1 End plate kit, G3/8, Series 581 valve	1825503145	5	1
13	ISO1 Flow control insert kit, Series 581	5811001000	5	1
13	ISO1 Manifold segment, bottom ported, G1/4, Series 581 valve	1825503144	5	1
13	ISO1 Manifold segment, side ported 1/4"NPT, Series 581 valve	R432015314	5	1
13	ISO1 Regulator w/Cont @ 2 & 4 : non plug-in dual regulator, 581	0821302051	5	1
13	ISO1 Regulator w/Cont @ Port 1 : non plug-in single regulator, 581	0821302048	5	1
13	ISO1 Single subbase, side ported, 1/4"NPT	R432015524	5	1
13	ISO1 Single subbase, side ported, 3/8"NPT	R432015488	5	1
13	ISO1 Single subbase, side ported, G1/8	1825503143	5	1
13	ISO2 End plate kit, 3/4"NPT, Series 581 valve	R432015319	5	1
13	ISO2 Flow control insert kit, Series 581	5812001000	5	1
13	ISO2 Manifold segment, side ported 1/2"NPT, Series 581 valve	R432015318	5	1
13	ISO2 Regulator w/Cont @ 2 & 4 : non plug-in dual regulator, 581	0821302067	5	1
13	ISO2 Regulator w/Cont @ Port 1 : non plug-in single regulator, 581	0821302064	5	1
13	ISO2 Single subbase, side ported, 1/2"NPT	R432015307	5	1
13	ISO2 Single subbase, side ported, 3/8"NPT	R432031845	5	1
13	ISO2 Single subbase, side ported, G3/8	1825503146	5	1
13	ISO3 End plate kit, 1"NPT, Series 581 valve	R432015492	5	1


GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
13	ISO3 Flow control insert kit, Series 581	5813001000	5	1
13	ISO3 Manifold segment, bottom ported 3/4"NPT, 581 valve	R432015490	5	1
13	ISO3 Regulator w/Cont @ 2 & 4 : non plug-in dual regulator, 581	5747021032	5	1
13	ISO3 Regulator w/Cont @ Port 1 : non plug-in single regulator, 581	0821302050	5	1
13	ISO3 Single subbase, side ported, 1/2"NPT	R432015308	5	1
13	ISO3 Single subbase, side ported, 3/4"NPT	R432015309	5	1
13	ISO3 Single subbase, side ported, G1/2	1825503149	5	1
13	Sandwich flow control meter out, ISO1 Series 581 valve	R432015347	5	1
13	Sandwich flow control meter out, ISO2 Series 581 valve	R432015348	5	1
13	Sandwich flow control meter out, ISO3 Series 581 valve	R432008895	5	1
13	Silencer, 1/2 BSPP thread, Sintered Bronze, 2/pack	1827000003	10	1
13	Silencer, 1/2"NPT, metal threaded, Series 581	R432011952	10	1
13	Silencer, 1/4 BSPP thread, Sintered Bronze, 10/pack	1827000001	10	1
13	Silencer, 3/4"NPT, metal threaded, Series 581	R432012059	10	1
13	Silencer, 3/8 BSPP thread, Sintered Bronze, 5/pack	1827000002	10	1
13	Silencer, 3/8"NPT, metal threaded, Series 581	R432012058	10	1
	 Series 740 Valves			
14	new 740 Series 5/4 without coil, 6mm fittings V740-5/4CC-DI06-NONE-07-BASIC	5727855302	5	1
14	740 Valve 5/2 DS: 5/2 double solenoid, 110VAC	R432016659	5	1
14	740 Valve 5/2 DS: 5/2 double solenoid, 24VDC	R432016663	5	1
14	740 Valve 5/2 SS less Coil:5/2 single solenoid, 10mm push-in fittings	R432015405	5	1
14	740 Valve 5/2 SS: 5/2 single solenoid, 110VAC	5727495270	5	1
14	740 Valve 5/2 SS: 5/2 single solenoid, 24VDC	5727490220	5	1
14	740 Valve 5/2 SS: 5/2 single solenoid, corrosion resistant version, 110VAC	R432015590	5	1
14	740 Valve 5/2 SS: 5/2 single solenoid, corrosion resistant version, 24VDC	R432015593	5	1
14	740 Valve 5/2 SS:5/2 sgl sol,corrosion resistant,110VAC w/lighted conn	R432015613	5	1
14	740 Valve 5/2 SS:5/2 sgl sol,corrosion resistant,24VDC w/lighted conn	R432015615	5	1
14	Blanking Cap 3/8",5/16", or 8mm for Series 740	8919905502	10	1
14	Coil form A 110 VAC coil, 50/60 Hz	5428457072	10	1
14	Coil form A 12 VDC coil, Series 740	R432011988	10	1
14	Coil form A 120 VAC coil, Series 740	R432011985	10	1
14	Coil form A 24 VDC coil, 2.1 W	5420507022	10	1
14	Coil form A 24 VDC coil, Series 740	R432011989	10	1
14	Elbow fitting for manifold, 3/8"	R432015301	10	3
14	Elbow fitting for Series 740 manifold, 1/4"	R432015479	10	3
14	Exhaust tube nut & kit for Series 740: silencer kit	R432013850	8	3
14	Form A Din connector, 120 VAC lighted, no cable	1834484102	10	1
14	Form A Din connector, 120 VAC lighted, no cable, 1/2" Conduit	R432008421	10	1
14	Form A Din connector, 120VAC lighted, no cable	R432013726	15	2
14	Form A Din connector, 12VDC lighted, no cable	R432013729	15	2

GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
14	Form A Din connector, 24VDC lighted, no cable	R432013730	15	2
14	Form A Din connector, non lighted, no cable	8941000302	10	1
14	Form A Din connector, non lighted, no cable, 1/2" Conduit	R432015626	15	2
14	Kit, Manifold Supply Pressure for Series 740	R432015512	5	1
14	Kit, shear plug manifold for Series 740	R432013852	5	1
14	Kit, tube nut for 3/8 Tubing for Series 740	R432015287	5	1
14	Manifold blanking kit for Series 740	R432015511	5	1
14	Manifold bushing kit for Series 740	R432015330	5	1
14	Manifold, end segment for Series 740: (end segment)	R432013812	5	1
14	Manifold, inlet segment for Series 740: (supply port segment)	R432013811	5	1
14	Manifold, intermediate segment for Series 740: (station segment)	R432013813	10	3
14	Manifold, single-station for Series 740	R432015880	5	1
14	Reducer fitting 1/4" for Series 740	R432015475	8	3
				
	Series 840 Valves			
15	840 Valve-DBL SOL (110 VAC): 4/2 double solenoid, with coil	R432008664	5	1
15	840 Valve-DBL SOL (12 VDC): 4/2 double solenoid, with coil	R432008665	5	1
15	840 Valve-DBL SOL (24 VDC): 4/2 double solenoid, with coil	R432008666	5	1
15	840 Valve-SGL SOL (110 VAC): 4/2 single solenoid, with coil	5728409990	5	1
15	840 Valve-SGL SOL (12 VDC): 4/2 single solenoid, with coil	R432008662	5	1
15	840 Valve-SGL SOL (24 VDC): 4/2 single solenoid, with coil	5728409980	5	1
15	Blanking Cap for 840: lock nut M8x13-PA	8930715002	10	1
15	Elbow fitting for 840 manifold, 1/4"	R432015479	10	3
15	Elbow fitting for 840 manifold, 3/8"	R432015301	10	3
15	Elbow fitting valve 1/4" for 840	R432008328	8	3
15	new End cap for 840 valve wireway	R432008932	5	1
15	Form C connector, 120VAC lighted, no cable, for 840, 579 and TC valves	R432011981	10	1
15	Form C connector, 24VDC lighted, no cable, for 840, 579 and TC valve	R432011982	10	1
15	Form C connector, 250VAC/300VDC non lighted, no cable, 840, 579, TC	8941012202	10	1
15	Kit, 1/2" Conduit connector for 840 valve wireway	R432008830	5	1
15	M5 Sintered silencer 10/pkg for 840 pilot	1827000006	10	1
15	Manifold blanking kit for 840 valve	R432008420	5	1
15	Manifold bushing kit for 840: for dual pressure	5728400092	5	1
15	Segment, end manifold for 840: end segment	R432008412	5	1
15	Segment, inlet manifold for 840: inlet segment	R432008411	5	1
15	Segment, station manifold for 840 intermediate segment	R432008413	8	3
15	Silencer for 840 Valve: M8x1	5324002000	10	1
15	Silencer for manifold for 840: M12x1	5324002020	10	1
15	Single station manifold for 840: single station subbase	R432008744	5	1
15	Tube nut kit 1/4" for 840 valve, 2/pkg	R432015689	5	1
15	Tube nut kit 3/8" for 840 valve, 2/pkg	R432008514	5	1




GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
15	Wireway end cap assembly, 840 valve	R432008829	5	1
15	Wireway segment, 840 valve	R432008679	8	3
	 Ceram™ ISO 5599/1 Valves			
16	CERAM SZ1 AP (GT-010050-03333):5/2 double air pilot	R432006392	5	1
16	CERAM SZ1 AP (GT-010050-03340):5/2 single air pilot	R432006393	5	1
16	CERAM SZ1 CC (GT-010042-02626):5/3 closed ctr., int pilot, 120 VAC	R432006382	5	1
16	CERAM SZ1 CC (GT-010042-04141):5/3 closed ctr., int pilot, 24 VDC	R432006385	5	1
16	CERAM SZ1 CC less Coils (GT-010042-00000):5/3 closed ctr., int pilot	R432002473	5	1
16	CERAM SZ1 DS (GT-010062-02424):5/2 double sol., int pilot, 120 VAC	R432006471	5	1
16	CERAM SZ1 DS (GT-010062-03939):5/2 double sol., int pilot, 24 VDC	R432006474	5	1
16	CERAM SZ1 DS less Coils (GT-010062-00000):5/2 double sol., int pilot	R432002479	5	1
16	CERAM SZ1 OC (GT-010032-02626):5/3 open ctr., int pilot, 120 VAC	R432006365	5	1
16	CERAM SZ1 OC (GT-010032-04141):5/3 open ctr., int pilot, 24 VDC	R432006368	5	1
16	CERAM SZ1 OC less Coils (GT-010032-00000):5/3 open ctr., int pilot	R432002472	5	1
16	CERAM SZ1 SS (GT-010061-02440):5/2 single sol., int pilot, 120 VAC	R432006435	5	1
16	CERAM SZ1 SS (GT-010061-02451):5/2 sgl. sol., int pilot, 120 VAC, air spr. ret.	R432006436	5	1
16	CERAM SZ1 SS (GT-010061-03940):5/2 single sol., int pilot, 24 VDC	R432006441	5	1
16	CERAM SZ1 SS (GT-010061-03951):5/2 sgl. sol., int pilot, 24 VDC, air spr. ret.	R432006442	5	1
16	CERAM SZ1 SS less Coil (GT-010061-00040):5/2 single sol., int pilot	R432002477	5	1
16	CERAM SZ2 CC (GS-020042-02626):5/3 closed ctr., int pilot, 120 VAC	R432006076	5	1
16	CERAM SZ2 CC (GS-020042-04141):5/3 closed ctr., int pilot, 24 VDC	R432006079	5	1
16	CERAM SZ2 CC less Coils (GS-020042-00000):5/3 closed ctr., int pilot	R432002443		
16	CERAM SZ2 DS (GS-020062-02424):5/2 double sol., int pilot, 120 VAC	R432006156	5	1
16	CERAM SZ2 DS (GS-020062-03939):5/2 double sol., int pilot, 24 VDC	R432006158	5	1
16	CERAM SZ2 DS less Coils (GS-020062-00000):5/2 double sol., int pilot	R432002449	5	1
16	CERAM SZ2 OC less Coils (GS-020032-00000):5/3 open ctr., int pilot	R432002442	5	1
16	CERAM SZ2 SS (GS-020061-02440):5/2 single sol., int pilot, 120 VAC	R432006124	5	1
16	CERAM SZ2 SS (GS-020061-03940):5/2 single sol., int pilot, 24 VDC	R432006130	5	1
16	CERAM SZ2 SS less Coil (GS-020061-00040) 5/2 single sol., int pilot	R432002447	5	1
16	CERAM SZ3 CC (GS-030042-02626):5/3 closed ctr., int pilot, 120 VAC	R432006196	5	1
16	CERAM SZ3 CC (GS-030042-04141):5/3 closed ctr., int pilot, 24 VDC	R432006199	5	1
16	CERAM SZ3 DS (GS-030062-02424):5/2 double sol., int pilot, 120 VAC	R432006265	5	1
16	CERAM SZ3 DS (GS-030062-03939):5/2 double sol., int pilot, 24 VDC	R432006267	5	1
16	CERAM SZ3 SS (GS-030061-02440):5/2 single sol., int pilot, 120 VAC	R432006238	5	1
16	CERAM SZ3 SS (GS-030061-03940):5/2 single sol., int pilot, 24 VDC	R432006243	5	1
16	Coil form A 110 VAC coil, 50/60 Hz	5428457072	10	1
16	Coil form A 12 VDC coil, CERAM	R432011988	10	1
16	Coil form A 120 VAC coil, CERAM	R432011985	10	1
16	Coil form A 24 VAC coil, CERAM	R432011990	10	1

GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
16	Coil form A 24 VDC coil, 2.1 W	5420507022	10	1
16	Coil form A 24 VDC coil, CERAM	R432011989	10	1
16	Coil form A 240 VAC coil, CERAM	R432011986	10	1
16	Form A Din connector, 120 VAC lighted, no cable	1834484102	10	1
16	Form A Din connector, 120 VAC lighted, no cable, 1/2" Conduit	R432008421	15	2
16	Form A DIN connector, 120 VAC lighted, no cable, CERAM valve	R432013726	15	2
16	Form A DIN connector, 12VDC lighted, no cable, CERAM valve	R432013729	15	2
16	Form A DIN connector, 24VDC lighted, no cable, CERAM valve	R432013730	15	2
16	Form A Din connector, non lighted, no cable, 1/2" Conduit	R432015626	10	1
16	Form A DIN connector, non lighted, no cable, CERAM valve	8941000302	10	1
16	ISO1 End plate kit, 3/8"NPT, CERAM valve	R432015316	2	1
16	ISO1 End plate kit, G3/8	1825503145	2	1
16	ISO1 Manifold segment, bottom ported, G1/4	1825503144	5	1
16	ISO1 Manifold segment, side ported 1/4"NPT, CERAM valve	R432015314	5	1
16	ISO1 Regulator w/Cont @ 2 & 4: non plug-in dual regulator for CERAM	0821302051	5	1
16	ISO1 Regulator w/Cont @ Port 1: non plug-in single regulator for CERAM	0821302048	5	1
16	ISO1 Single subbase, side ported, 1/4"NPT, CERAM valve	R432015524	5	1
16	ISO1 Single subbase, side ported, 3/8"NPT, CERAM valve	R432015488	5	1
16	ISO1 Single subbase, side ported, G1/4, CERAM valve	1825503143	5	1
16	ISO2 End plate kit, 3/4"NPT, CERAM valve	R432015319	2	1
16	ISO2 Manifold segment, side ported 1/2"NPT, CERAM valves	R432015318	5	1
16	ISO2 Regulator w/Cont @ 2 & 4 :non plug-in dual regulator, CERAM	0821302067	5	1
16	ISO2 Regulator w/Cont @ Port 1 :non plug-in single regulator, CERAM	0821302064	5	1
16	ISO2 Single subbase, side ported, 1/2"NPT, CERAM valve	R432015307	5	1
16	ISO2 Single subbase, side ported, 3/8"NPT, CERAM valve	R432031845	5	1
16	ISO2 Single subbase, side ported, G3/8, CERAM valve	1825503146	5	1
16	ISO3 End plate kit, 1"NPT CERAM valve	R432015492	2	1
16	ISO3 Manifold segment, bottom ported 3/4"NPT, CERAM valves	R432015490	5	1
16	ISO3 Regulator w/Cont @ 2 & 4 : non plug-In dual regulator, CERAM	5747021032	5	1
16	ISO3 Regulator w/Cont @ Port 1 : non plug-In single regulator, CERAM	0821302050	5	1
16	ISO3 Single subbase, side ported, 1/2"NPT, CERAM valve	R432015308	5	1
16	ISO3 Single subbase, side ported, 3/4"NPT, CERAM valve	R432015309	5	1
16	ISO3 Single subbase, side ported, G1/2, CERAM valve	1825503149	5	1
16	Sandwich flow control meter out, ISO1 CERAM	R432015347	5	1
16	Sandwich flow control meter out, ISO2 CERAM	R432015348	5	1
16	Sandwich flow control meter out, ISO3 CERAM	R432008895	5	1
16	Silencer, 1/2 BSPP thread, Sintered Bronze, 2/pack	1827000003	10	1
16	Silencer, 1/2"NPT, metal threaded, CERAM valve	R432011952	10	1
16	Silencer, 1/4 BSPP thread, Sintered Bronze, 10/pack	1827000001	10	1
16	Silencer, 3/4"NPT, metal threaded, CERAM valve	R432012059	10	1
16	Silencer, 3/8 BSPP thread, Sintered Bronze, 5/pack	1827000002	10	1
16	Silencer, 3/8"NPT, metal threaded, CERAM valve	R432012058	10	1



GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
				
	Series AP Direction Control Valves			
17	Series AP 1/8"NPT 3/2 Normally Closed Panel Mount Valve	R450055453	3	1
17	Series AP G1/8 2/2 Normally Closed Valve with Plunger	0820404023	3	1
17	Series AP G1/8 3/2 Normally Closed Valve with Plunger	0820402101	3	1
17	Series AP G1/8 3/2 Normally Closed Valve with Pushbutton	0820402104	3	1
17	Series AP/ST Panel Mount Black Pushbutton Operator	R412012735	3	1
17	Series AP/ST Panel Mount Grey Rotary Switch Operator	R412012745	4	2
17	VVAP-4/2DM-PED : Series AP 1/4"NPT, 4/2 pedal operated valve	0820401017	5	1
				
	Series ST Directional Control Valves			
18	Series AP/ST Panel Mount Black Pushbutton Operator	R412012735	3	1
18	Series AP/ST Panel Mount Grey Rotary Switch Operator	R412012745	4	2
18	Series ST G1/8 3/2 Spring Return Valve with Plunger	0820402001	3	1
18	Series ST G1/8 3/2 Spring Return Valve with Roller	0820402002	3	1
18	Series ST G1/8 5/2 Detented Valve with Lever	0820403005	3	1
18	Series ST G1/8 5/2 Panel Mount Valve	R422002213	3	1
18	Series ST G1/8 5/2 Spring Return Valve with Roller	0820403002	3	1
				
	Series HF03-LG Valve Manifolds			
19	<i>new</i> 25-Pin D-Sub Cable, straight, 10m	R419500456	3	1
19	<i>new</i> 25-Pin D-Sub Cable, straight, 3m	R419500454	5	1
19	B-Design Control Unit, 16-outputs, 25-Pin D-Sub Connector	R412008702	2	1
19	B-Design Control Unit, 2-outputs, 2x M12 connectors	R412008705	2	1
19	B-Design Control Unit, 8-outputs, 25-Pin D-Sub Connector	R412008701	2	1
19	B-Design Control Unit, 8-outputs, 8x M8 connectors	R412008703	2	1
19	BDC B-Design DDL Bus Node (32-outputs)	R412008541	3	1
19	BDC B-Design Profibus DP Bus Node (32-outputs)	R412008537	3	1
19	BDC B-Design SERCOS III Bus Node	R412009516	3	1
19	Blanking plate for HF03-LG manifolds	1825A00085	5	1
19	Blocking disk for HF03-LG manifolds	1827A20285	7	2
19	CMS B-Design AS-i 8O/8I Bus Node	R412003486	2	1
19	CMS B-Design DDL Bus Node (24-outputs)	R412006880	3	1
19	CMS B-Design DeviceNet Bus Node (32-outputs)	R412008517	3	1
19	CMS B-Design Ethernet I/P Bus Node	R412012755	3	1
19	CMS B-Design Input Module, 8-inputs, 4x M12 connectors	R412000871	2	1
19	CMS B-Design Input Module, 8-inputs, 8x M8 connectors	R412003489	2	1
19	CMS B-Design Left End Plate	R412003490	3	1

GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
19	CMS B-Design Output Module, 8-outputs, 4x M12 connectors	R412000870	2	1
19	CMS B-Design Output Module, 8-outputs, 8x M8 connectors	R412005968	2	1
19	CMS B-Design Profibus DP Bus Node (32-outputs)	R412008516	3	1
19	DDL data cable, M12x1, 5-pin, A-coded, 2m length B-Design	8946054692	5	1
19	DeviceNet data IN plug, M12x1, 5-pin, A-coded, socket (female) B-Design	8942051602	5	1
19	DeviceNet data OUT plug, M12x1, 5-pin, A-coded, socket (male) B-Design	8942051612	5	1
19	DIN rail mounting kit for HF03-LG manifolds	1827010709	5	1
19	Ethernet/SERCOS, D-coded, M12 to M12, 5m, double ended cordset	R432033421	5	1
19	Ethernet/SERCOS, D-coded, M12 to RJ45, 5m, double ended cordset	R432033416	5	1
19	Exhaust silencer 1/2", push-in type, 5/pkg for HF03-LG manifolds	R412007714	10	1
19	Gauge for HF03 sandwich regulator: 4mm nipple type	R412009413	5	1
19	new HF03 2x 3/2 normally closed 24VDC HF03 - 3/2CC - 024DC	0820055101	5	1
19	new HF03 5/2 single solenoid 24VDC HF03 - 5/2SR - 024DC	0820055052	5	1
19	new HF03 5/3 closed center 24VDC HF03 - 5/3CC - 024DC	0820055601	5	1
19	new HF03 AS-I interface, bus powered 4 digital outputs PARTS SET ASI 4DO OHNE AUX	R412008679	5	1
19	new HF03 AS-I interface, bus powered 8 digital outputs PARTS SET ASI 8DO OHNE AUX	R412008682	5	1
19	HF03 Regulator with control @ Port 1: 7 to 150 psi	0821302200	5	1
19	HF03 subbase extension kit for one valve, 1/8"NPT	R412005783	5	1
19	HF03 subbase extension kit for one valve, 5/16" or 8mm tube	1827010606	5	1
19	HF03 Valve, L/NL MO, 5/2 DS: 5/2 double solenoid 24VDC, code "BR"	0820055501	5	1
19	HF03 Valve, L/NL MO, 5/2 SS w/AR: 5/2 air return 24VDC, code "CR"	0820055001	5	1
19	HF03 Valve, L/NL MO, 5/2 SS w/SR: 5/2 spring return 24VDC, code "AR"	0820055051	5	1
19	HF03 Valve, L/NL MO, NC/NO: 2x3/2 closed/open 24VDC, code "HR"	0820055301	5	1
19	HF03 Valve, L/NL MO, NO/NC: 2x3/2 open/closed 24VDC, code "JR"	0820055311	5	1
19	HF03 Valve, L/NL MO, NO/NO: 2x3/2 open 24VDC, code "HR"	0820055201	5	1
19	HF03 Valve, NL MO, 5/2 DS: 5/2 double solenoid 24VDC, code "BR"	0820055502	5	1
19	HF03 Valve, NL MO, 5/3 CC: 5/3 closed center 24VDC, code "DR"	0820055602	5	1
19	HF03 Valve, NL MO, NC/NC: 2x3/2 closed 24VDC, code "GR"	0820055102	5	1
19	HF03-LG TP Subbase: Manifold Base for RPS Supply/Exhaust Modules	1827010707	5	1
19	M12, 4-pin, 5m, straight cable with flying leads	1834484257	5	1
19	M8 3-Pin connector: straight 5m cable	1834484168	10	1
19	M8 to M12, 3-pin, 2m double ended cordset	8946203462	5	1
19	M8 to M8, 3-pin, 1m, double ended cordset	8946203702	5	1
19	M8, 3-pin, 3m, straight cable with flying leads	1834484166	10	1
19	Power plug, M12x1, 4-pin, A-coded, socket (female) B-Design	8941054324	5	1
19	Profibus data IN plug, M12x1, 5-pin, B-coded, socket (female) B-Design	8941054044	5	1
19	Profibus data OUT plug, M12x1, 5-pin, B-coded, socket (male) B-Design	8941054054	5	1
19	Profibus-DP, B-coded, M12 to M12, 5-pin, 5m, double ended cordset	R432033411	5	1
19	Series HF03-LG, configured valve manifold	Configurable	5	3
19	Supply plate for HF03-LG manifolds	1821A39033	5	1

GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
	 Series LS04 Valves			
20	2-pin Straight connector cable, 3m for LS04 valves	1834484266	10	1
20	Exhaust silencer 1/4", push-in connection, 5/ package for LS04 Valves	R412005727	10	1
20	LS04-3/2CC-024DC-AF-I-M8-1/4 INCH : 2x3/2 closed ctr. 24VDC M8	R422101033	5	1
20	LS04-3/2CC-024DC-AF-I-M8-1/8 INCH : 2x3/2 closed ctr. 24VDC M8	R422101032	5	1
20	LS04-3/2CC-024DC-AF-I-MO-Ø 6 : 2x3/2 closed ctr. 24VDC 2-pin conn.	R422100580	5	1
20	LS04-5/2DS-024DC-AF-I-M8-1/4 INCH : 5/2 double sol. 24VDC M8 conn.	R422101019	5	1
20	LS04-5/2SR-024DC-AF-I-M8-1/4 INCH : 5/2 spring ret. 24VDC M8 conn.	R422101013	5	1
20	LS04-5/2SR-024DC-AF-I-M8-1/8 INCH : 5/2 spring ret. 24VDC M8 conn.	R422101012	5	1
20	LS04-5/2SR-024DC-AF-I-MO-Ø 6 : 5/2 spring ret. 24VDC 2-pin conn.	R422100560	5	1
20	LS04-5/3CC-024DC-AF-I-M8-1/4 INCH : 5/3 closed ctr. 24VDC M8 conn.	R422101047	5	1
20	LS04-5/3CC-024DC-AF-I-M8-1/8 INCH : 5/3 closed ctr. 24VDC M8 conn.	R422101046	5	1
20	M8 Right angle connector cable, 3m for LS04 valves	1834484167	10	1
	 Series TC08 and TC15 Valves			
21	Form C connector, 120VAC lighted, no cable, for TC, 840, and 579 valves	R432011981	10	1
21	Form C connector, 24VDC lighted, no cable, for TC, 840 and 579 valves	R432011982	10	1
21	Form C connector, 250VAC/300VDC non lighted, no cable, TC, 840, 579	8941012202	10	1
21	Silencer, 1/4"NPT, metal threaded, for TC15	R432012060	10	1
21	Silencer, 1/8"NPT, metal threaded, for TC08	R432012062	10	1
21	TC08 1-station tie rod	1820A09969	6	1
21	TC08 10-station tie rod	1823053255	6	1
21	TC08 2-station tie rod	1823053247	6	1
21	TC08 2x3/2 NC/NC, 1/8"NPT, 110VAC, external pilot, manifold	R422102126	2	1
21	TC08 2x3/2 NC/NC, 1/8"NPT, 110VAC, internal pilot, inline	R422102102	2	1
21	TC08 2x3/2 NC/NC, 1/8"NPT, 24VDC, external pilot, manifold	R422102125	10	1
21	TC08 2x3/2 NC/NC, 1/8"NPT, 24VDC, internal pilot, inline	R422102101	3	1
21	TC08 2x3/2 NC/NO, 1/8"NPT, 24VDC, external pilot, manifold	R422102133	2	1
21	TC08 2x3/2 NC/NO, 1/8"NPT, 24VDC, internal pilot, inline	R422102109	2	1
21	TC08 2x3/2 NO/NO, 1/8"NPT, 110VAC, external pilot, manifold	R422102130	2	1
21	TC08 2x3/2 NO/NO, 1/8"NPT, 110VAC, internal pilot, inline	R422102106	2	1
21	TC08 2x3/2 NO/NO, 1/8"NPT, 24VDC, external pilot, manifold	R422102129	2	1
21	TC08 2x3/2 NO/NO, 1/8"NPT, 24VDC, internal pilot, inline	R422102105	2	1
21	TC08 4-station tie rod	1823053249	6	1
21	TC08 6-station tie rod	1823053251	6	1
21	TC08 8-station tie rod	1823053253	6	1
21	TC08 Inch additional supply & exhaust plate: 1/3/5 closed, MVS manifold	R422101298	5	1
21	TC08 Inch end plate kit external pilot for MVS manifold	R422101297	5	1
21	TC08 Inch end plate kit internal pilot for MVS manifold	R422101296	5	1




GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
21	TC08-5/2-G1/8-E : 5/2 double air pilot G1/8, inline	0820260003	5	1
21	TC08-5/2DS-G1/8-024VDC-I-C: 5/2 dbl sol G1/8 int pil.,inline,lckg.,form C	0820060501	5	1
21	TC08-5/2DS-N018-024DC-EP: 5/2 double sol. 1/8"NPT ext pilot, inline	R422101221	5	1
21	TC08-5/2DS-N018-024DC-IP: 5/2 double sol. 1/8"NPT int pilot, inline	R422101217	5	1
21	TC08-5/2DS-N018-024DC-MVS :5/2 double sol. 1/8"NPT ext pil., manifold	R422101161	5	1
21	TC08-5/2DS-N018-110AC-IP: 5/2 double sol. 1/8"NPT int pilot, inline	R422101218	5	1
21	TC08-5/2DS-N018-110AC-MVS: 5/2 double sol. 1/8"NPT ext pil., manifold	R422101162	5	1
21	TC08-5/2SR-G1/8-024VDC-E-C: 5/2 spr.ret, G1/8 ext.pil.inline,lckg,form C	0820060076	5	1
21	TC08-5/2SR-G1/8-024VDC-I-C: 5/2 spr.ret. G1/8 int pil.,inline,lckg,form C	0820060026	5	1
21	TC08-5/2SR-G1/8-024VDC-I-M8: 5/2 spr.ret.G1/8 int pil.,inline,non-lck,M8	0820060311	5	1
21	TC08-5/2SR-N018-024DC-EP: 5/2 spring ret. 1/8"NPT ext pilot, inline	R422101213	5	1
21	TC08-5/2SR-N018-024DC-IP: 5/2 spring return 1/8"NPT int pilot, inline	R422101209	8	2
21	TC08-5/2SR-N018-024DC-MVS: 5/2 spring ret. 1/8"NPT ext pil., manifold	R422101157	5	1
21	TC08-5/2SR-N018-110AC-EP: 5/2 spring ret. 1/8"NPT ext pilot, inline	R422101214	5	1
21	TC08-5/2SR-N018-110AC-IP: 5/2 spring return 1/8"NPT int pilot, inline	R422101210	5	1
21	TC08-5/2SR-N018-110AC-MVS: 5/2 spring ret. 1/8"NPT ext pil., manifold	R422101158	10	2
21	TC08-5/3CC-N018-024DC-IP: 5/3 closed center 1/8"NPT int pilot, inline	R422101225	5	1
21	TC08-5/3CC-N018-024DC-MVS: 5/3 closed ctr.1/8"NPT ext pil., manifold	R422101165	5	1
21	TC08-5/3CC-N018-110AC-IP: 5/3 closed center 1/8"NPT int pilot, inline	R422101226	5	1
21	TC08-5/3CC-N018-110AC-MVS: 5/3 closed ctr.1/8"NPT ext pil., manifold	R422101166	5	1
21	TC15 1-station tie rod	1823503999	6	1
21	TC15 10-station tie rod	1823053266	6	1
21	TC15 2-station tie rod	1823053258	6	1
21	TC15 2x3/2 NC/NC, 1/4"NPT, 110VAC, external pilot, manifold	R422102261	2	1
21	TC15 2x3/2 NC/NC, 1/4"NPT, 110VAC, internal pilot, inline	R422102237	2	1
21	TC15 2x3/2 NC/NC, 1/4"NPT, 24VDC, external pilot, manifold	R422102260	5	1
21	TC15 2x3/2 NC/NC, 1/4"NPT, 24VDC, internal pilot, inline	R422102236	3	1
21	TC15 2x3/2 NC/NO, 1/4"NPT, 24VDC, external pilot, manifold	R422102268	2	1
21	TC15 2x3/2 NO/NO, 1/4"NPT, 110VAC, external pilot, manifold	R422102265	2	1
21	TC15 2x3/2 NO/NO, 1/4"NPT, 24VDC, external pilot, manifold	R422102264	2	1
21	TC15 2x3/2 NO/NO, 1/4"NPT, 24VDC, internal pilot, inline	R422102244	2	1
21	TC15 4-station tie rod	1823053260	6	1
21	TC15 6-station tie rod	1823053262	6	1
21	TC15 8-station tie rod	1823053264	6	1
21	TC15 Inch additional supply & exhaust plate : 1/3/5 closed, MVS manifold	R422101302	5	1
21	TC15 Inch end plate kit external pilot for MVS manifold	R422101301	5	1
21	TC15 Inch end plate kit internal pilot for MVS manifold	R422101300	5	1
21	TC15-5/2-G1/4-E : 5/2 double air pilot G1/4, inline	0820258003	5	1
21	TC15-5/2DS-G1/4-024VDC-I-C: 5/2 dbl sol G1/4 int pil.,inline,lckg,form C	0820058501	5	1
21	TC15-5/2DS-N014-024DC-EP: 5/2 double sol. 1/4"NPT ext pilot, inline	R422101269	5	1
21	TC15-5/2DS-N014-024DC-IP :5/2 double sol. 1/4"NPT internal pilot inline	R422101265	5	1
21	TC15-5/2DS-N014-024DC-MVS :5/2 double sol. 1/4"NPT ext pil., manifold	R422101185	5	1
21	TC15-5/2DS-N014-110AC-IP :5/2 double solenoid 1/4"NPT int pilot inline	R422101266	5	1

GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
21	TC15-5/2DS-N014-110AC-MVS :5/2 double sol. 1/4"NPT ext pil., manifold	R422101186	5	1
21	TC15-5/2SR-G1/4-024VDC-I-C: 5/2 spr.ret. G1/4 int pil.,inline,lckg.,form C	0820058026	5	1
21	TC15-5/2SR-G1/4-024VDC-I-M8:5/2 spr.ret,G1/4 int pil,inline,non-lckg,M8	0820058311	5	1
21	TC15-5/2SR-N014-024DC-EP: 5/2 spring ret. 1/4"NPT ext pilot, inline	R422101261	5	1
21	TC15-5/2SR-N014-024DC-IP :5/2 spring return 1/4"NPT int pilot inline	R422101257	5	1
21	TC15-5/2SR-N014-024DC-MVS :5/2 spring ret. 1/4"NPT ext pil., manifold	R422101181	5	1
21	TC15-5/2SR-N014-110AC-EP: 5/2 spring ret. 1/4"NPT ext pilot, inline	R422101262	5	1
21	TC15-5/2SR-N014-110AC-IP :5/2 spring return 1/4"NPT int pilot inline	R422101258	5	1
21	TC15-5/2SR-N014-110AC-MVS :5/2 spring ret. 1/4"NPT ext pil., manifold	R422101182	5	1
21	TC15-5/3CC-N014-024DC-IP :5/3 closed center 1/4"NPT int pilot inline	R422101273	5	1
21	TC15-5/3CC-N014-024DC-MVS :5/3 closed ctr. 1/4"NPT ext pil., manifold	R422101189	5	1
21	TC15-5/3CC-N014-110AC-IP :5/3 closed center 1/4"NPT int pilot inline	R422101274	5	1
21	TC15-5/3CC-N014-110AC-MVS :5/3 closed ctr. 1/4"NPT ext pil., manifold	R422101190	5	1
	 Series CD04 Directional Control Valves			
22	CD04 3/2 Manual/Mechanical Valve with Plunger, 1/8"PTF	R412013026	5	1
22	CD04 3/2 Manual/Mechanical Valve with Roller, 1/8"PTF	R412013021	5	1
22	<i>new</i> CD04 3/2 normally closed roller operated G1/8 ports CD04-3/2NC-G018-ROL	5634010100	5	1
22	CD04 3/2 normally closed single solenoid G1/8 ports CD04-3/2NC-G018	5710200100	5	1
22	CD04 3/2 Single Air Pilot Valve, 1/8"PTF	R412013298	5	1
22	CD04 3/2 Spring Return, 110 VAC Valve, 1/8"PTF	R412012698	5	1
22	CD04 3/2 Spring Return, 24 VDC Valve, 1/8"PTF	R412012696	5	1
22	CD04 5/2 Double Solenoid, 110 VAC Valve, 1/8"PTF	R412013001	5	1
22	CD04 5/2 Manual/Mechanical Valve with Roller, 1/8"PTF	R412013028	5	1
22	<i>new</i> CD04 5/2 roller operated G1/8 ports CD04-5/2SR-G018-ROL	5634210100	5	1
22	CD04 5/2 Single Air Pilot Valve, 1/8"PTF	R412013299	5	1
22	<i>new</i> CD04 5/2 single solenoid G1/8 ports CD04-5/2SR-G018	5710300100	5	1
22	CD04 5/2 Spring Return, 110 VAC Valve, 1/8"PTF	R412012711	5	1
22	CD04 5/2 Spring Return, 12 VDC Valve, 1/8"PTF	R412012708	5	1
22	CD04 5/2 Spring Return, 24 VDC Valve, 1/8"PTF	R412012709	5	1
22	Form B connector, 110V AC lighted, no cable, CD04	1834484105	10	1
22	Form B connector, 230V AC/DC non lighted, no cable, CD04	1834484096	10	1
22	Form B connector, 24V DC lighted, no cable, CD04	1834484104	10	1
	 Rotair® Block Directional Control Valves			
23	Rotair Block 1/4"NPT 5/2 Detented Manual/Mechanical Valve	R432013831	5	1
23	Rotair Block 1/4"NPT 5/3 Detented Closed Center Manual/Mechanical Valve	R432013837	5	1
23	Rotair Block 1/4"NPT 5/3 Detented Exhaust Open Center Manual/Mechanical Valve	R432013834	5	1


GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
	 Series ED02 & ED05 E/P Pressure Control			
24	Connection cable for ED02 & ED05, 15 ft. (5.0 m)	R419800110	5	1
24	Connection cable for ED02 & ED05, 8.2 ft. (2.5 m)	R419800109	5	1
24	Din rail mounting kit for ED02	R414002583	5	1
24	ED02-000-060-010-1M12A : 0-6bar, 0-10VDC w/ 1xM12 connector	R414002403	3	1
24	ED02-000-100-010-1M12A : 0-10bar, 0-10VDC w/1xM12 connector	R414002413	3	1
24	ED02-000-100-420-1M12A : 0-10bar, 4-20mA w/1xM12 connector	R414002411	3	1
24	ED05-000-100-010-1M12A : 0-10bar, 0-10VDC with 1xM12 connector	R414002009	3	1
24	ED05-000-100-420-1M12A : 0-10bar, 4-20mA with 1xM12 connector	R414002008	3	1
24	Tie rod kit and o-rings for (3) ED02's	R414002580	5	1
24	Tie rod kit and o-rings for (4) ED02's	R414002581	5	1
	 Series GSP Grippers			
25	Pneumatic parallel gripper, GSP-P-16, M5 thread	R412000417	1	1
25	Pneumatic parallel gripper, GSP-P-20, M5 thread	R412000420	1	1
25	Pneumatic parallel gripper, GSP-P-25, M5 thread	R412000423	1	1
25	Pneumatic parallel gripper, GSP-P-40, G1/8 BSPP thread	R412000426	1	1
25	Single-Ended cable, 3 meter, M8 female connector, 3-pin, right angle	1834484167	10	1
25	Single-Ended cable, 3 meter, M8 female connector, 3-pin, straight	1834484166	10	1
25	Single-Ended cable, 5 meter, M8 female connector, 3-pin, right angle	1834484169	10	1
25	Single-Ended cable, 5 meter, M8 female connector, 3-pin, straight	1834484168	10	1
25	ST4-NP-K03U-024 ST4 NPN prox. switch, 3 meter PUR cable	R412004989	4	1
25	ST4-NP-M08R-030 ST4 NPN prox. Switch, 0.3 meter PUR cable, 3 pin quick	R412004988	4	1
25	ST4-PN-K03U-030 ST4 PNP prox. switch, 3 meter PUR cable	0830100642	4	1
25	ST4-PN-K05U-030 ST4 PNP prox. switch, 5 meter PUR cable	0830100643	4	1
25	ST4-PN-M08R-030 ST4 PNP prox. switch, 0.3 meter PUR cable, 3-pin quick	0830100441	4	1
25	ST4-R3-K03U-030 ST4 reed proximity switch, 3 meter PUR cable	0830100640	4	1
25	ST4-R3-K05U-030 ST4 reed proximity switch, 5 meter PUR cable	0830100641	4	1
25	ST4-R3-M08R-030 ST4 reed prox. switch, 0.3 meter PUR cable, 3-pin quick	0830100440	4	1
25	ST4-R3-M08T-030 ST4 reed prox. switch, 0.3 meter PUR cable, 3-pin M8	R412004577	4	1
	 Series M Mini Cylinders			
26	Foot bracket 1-1/4, 1-1/2 bores Series M	R432007834	5	1
26	Foot bracket 3/4, 7/8, 1-1/16 bores Series M	R432007833	5	1
26	Foot bracket, 2" bore Series M	R432007836	5	1
26	Foot bracket, 7/16, 9/16 bores Series M	R432007831	5	1
26	M-10D-Y05 1.06x0.5 cylinder, front nose mount, dbl. acting, st. steel rod	R432006660	5	1
26	M-10D-Y10 1.06x1.0 cylinder, front nose mount, dbl. acting, st. steel rod	R432006662	5	1
26	M-10D-Y15 1.06x1.5 cylinder, front nose mount, dbl. acting, st. steel rod	R432006666	5	1

GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
26	M-10D-Y20 1.06x2.0 cylinder, front nose mount, dbl. acting, st. steel rod	R432006670	5	1
26	M-10D-Y30 1.06x3.0 cylinder, front nose mount, dbl. acting, st. steel rod	R432006672	5	1
26	M-10D-Y40 1.06x4.0 cylinder, front nose mount, dbl. acting, st. steel rod	R432006675	5	1
26	M-10DP-Y05 1.06x0.5 cylinder, rear pivot mount, dbl. acting, st. steel rod	R432006717	5	1
26	M-10DP-Y10 1.06x1.0 cylinder, rear pivot mount, dbl. acting, st. steel rod	R432006720	5	1
26	M-10DP-Y15 1.06x1.5 cylinder, rear pivot mount, dbl. acting, st. steel rod	R432006726	5	1
26	M-10DP-Y20 1.06x2.0 cylinder, rear pivot mount, dbl. acting, st. steel rod	R432006732	5	1
26	M-10DP-Y30 1.06x3.0 cylinder, rear pivot mount, dbl. acting, st. steel rod	R432006738	5	1
26	M-10DP-Y40 1.06x4.0 cylinder, rear pivot mount, dbl. acting, st. steel rod	R432006740	5	1
26	M-10DXP-Y05 1.06x0.5 cylinder, pivot/nose mount, dbl. acting, st. steel rod	R432006770	5	1
26	M-10DXP-Y10 1.06x1 cylinder, pivot/nose mount, dbl. acting, st. steel rod	R432006771	5	1
26	M-10DXP-Y15 1.06x1.5 cylinder, pivot/nose mount, dbl. acting, st. steel rod	R432006774	5	1
26	M-10DXP-Y20 1.06x2 cylinder, pivot/nose mount, dbl. acting, st. steel rod	R432006777	5	1
26	M-10DXP-Y30 1.06x3 cylinder, pivot/nose mount, dbl. acting, st. steel rod	R432006783	5	1
26	M-10DXP-Y40 1.06x4 cylinder, pivot/nose mount, dbl. acting, st. steel rod	R432006786	5	1
26	M-10DXP-Y50 1.06x5 cylinder, pivot/nose mount, dbl. acting, st. steel rod	R432006787	5	1
26	M-12D-Y10 1.25x1.0 cylinder, front nose mount, dbl. acting, st. steel rod	R432006890	5	1
26	M-12D-Y20 1.25x2.0 cylinder, front nose mount, dbl. acting, st. steel rod	R432006895	5	1
26	M-12D-Y40 1.25x4.0 cylinder, front nose mount, dbl. acting, st. steel rod	R432006900	5	1
26	M-15D-Y10 1.5 x1.0 cylinder, front nose mount, dbl. acting, st. steel rod	R432007055	5	1
26	M-15D-Y15 1.5x1.5 cylinder, front nose mount, dbl. acting, st. steel rod	R432007060	5	1
26	M-15D-Y20 1.5x2.0 cylinder, front nose mount, dbl. acting, st. steel rod	R432007061	5	1
26	M-15D-Y30 1.5x3.0 cylinder, front nose mount, dbl. acting, st. steel rod	R432007064	5	1
26	M-15DP-Y05 1.5x0.5 cylinder, rear pivot mount, dbl. acting, st. steel rod	R432007105	5	1
26	M-15DP-Y10 1.5x1.0 cylinder, rear pivot mount, dbl. acting, st. steel rod	R432007106	5	1
26	M-15DP-Y15 1.5x1.5 cylinder, rear pivot mount, dbl. acting, st. steel rod	R432007110	5	1
26	M-15DP-Y20 1.5x2.0 cylinder, rear pivot mount, dbl. acting, st. steel rod	R432007115	5	1
26	M-15DP-Y30 1.5x3.0 cylinder, rear pivot mount, dbl. acting, st. steel rod	R432007118	5	1
26	M-15DP-Y40 1.5x4.0 cylinder, rear pivot mount, dbl. acting, st. steel rod	R432007120	5	1
26	M-15DXP-Y10 1.5x1 cylinder, pivot/nose mount, dbl. acting, st. steel rod	R432007163	5	1
26	M-15DXP-Y20 1.5x2 cylinder, pivot/nose mount, dbl. acting, st. steel rod	R432007170	5	1
26	M-15DXP-Y40 1.5x4 cylinder, pivot/nose mount, dbl. acting, st. steel rod	R432007174	5	1
26	M-20D-10 2.0x1.0 cylinder, front nose mount, dbl. acting, carbon steel rod	R432007276	5	1
26	M-20D-20 2.0x2.0 cylinder, front nose mount, dbl. acting, carbon steel rod	R432007281	5	1
26	M-20D-40 2.0x4.0 cylinder, front nose mount, dbl. acting, carbon steel rod	R432007284	5	1
26	M-4DP-05 0.44x 0.5 cylinder, rear pivot mount, dbl. acting, st. steel rod	R432007472	5	1
26	M-4DP-10 0.44x1.0 cylinder, rear pivot mount, dbl. acting, st. steel rod	R432007473	5	1
26	M-4DXP-05 0.44x0.5 cylinder, pivot/nose mount, dbl. acting, st. steel rod	R432007481	5	1
26	M-4DXP-10 0.44x1.0 cylinder, pivot/nose mount, dbl. acting, st. steel rod	R432007482	5	1
26	M-5D-Y05 0.56x0.5 cylinder, front nose mount, dbl. acting, st. steel rod	R432007519	5	1
26	M-5D-Y10 0.56x1.0 cylinder, front nose mount, dbl. acting, st. steel rod	R432007520	5	1
26	M-5D-Y15 0.56x1.5 cylinder, front nose mount, dbl. acting, st. steel rod	R432007523	5	1
26	M-5DXP-Y05 0.56x0.5 cylinder, pivot/nose mount, dbl. acting, st. steel rod	R432007531	5	1


GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
26	M-5DXP-Y10 0.56x1 cylinder, pivot/nose mount, dbl. acting, st. steel rod	R432007533	5	1
26	M-7D-Y05 0.75x0.5 cylinder, front nose mount, dbl. acting, st. steel rod	R432007612	5	1
26	M-7D-Y10 0.75x1.0 cylinder, front nose mount, dbl. acting, st. steel rod	R432007613	5	1
26	M-7D-Y15 0.75x1.5 cylinder, front nose mount, dbl. acting, st. steel rod	R432007615	5	1
26	M-7D-Y20 0.75x2.0 cylinder, front nose mount, dbl. acting, st. steel rod	R432007617	5	1
26	M-7D-Y30 0.75x3.0 cylinder, front nose mount, dbl. acting, st. steel rod	R432007619	5	1
26	M-7D-Y40 0.75x4.0 cylinder, front nose mount, dbl. acting, st. steel rod	R432007621	5	1
26	M-7DP-Y05 0.75x0.5 cylinder, rear pivot mount, dbl. acting, st. steel rod	R432007639	5	1
26	M-7DP-Y10 0.75x1.0 cylinder, rear pivot mount, dbl. acting, st. steel rod	R432007640	5	1
26	M-7DP-Y15 0.75x1.5 cylinder, rear pivot mount, dbl. acting, st. steel rod	R432007643	5	1
26	M-7DP-Y20 0.75x2.0 cylinder, rear pivot mount, dbl. acting, st. steel rod	R432007644	5	1
26	M-7DP-Y30 0.75x3.0 cylinder, rear pivot mount, dbl. acting, st. steel rod	R432007645	5	1
26	M-7DP-Y40 0.75x4.0 cylinder, rear pivot mount, dbl. acting, st. steel rod	R432007648	5	1
26	M-7DXP-Y05 0.75x0.5 cylinder, pivot/nose mount, dbl. acting, st. steel rod	R432007661	7	2
26	M-7DXP-Y10 0.75x1 cylinder, pivot/nose mount, dbl. acting, st. steel rod	R432007662	5	1
26	M-7DXP-Y15 0.75x1.5 cylinder, pivot/nose mount, dbl. acting, st. steel rod	R432007665	5	1
26	M-7DXP-Y20 0.75x2 cylinder, pivot/nose mount, dbl. acting, st. steel rod	R432007667	5	1
26	M-7DXP-Y30 0.75x3 cylinder, pivot/nose mount, dbl. acting, st. steel rod	R432007670	5	1
26	M-8DXP-Y10 0.88x1 cylinder, pivot/nose mount, dbl. acting, st. steel rod	R432007761	5	1
26	Mounting nut 1-1/4, 1-1/2 bores Series M	R432007844	5	1
26	Mounting nut 3/4, 7/8, 1-1/16 bores Series M	R432007843	5	1
26	Mounting nut 7/16, 9/16 bores Series M	R432007841	5	1
26	Mounting nut, 2" bore Series M	R432007846	5	1
26	Pivot bracket kit 1-1/2 bore Series M, includes pivot pin	R432007819	5	1
26	Pivot bracket kit 1-1/4 bore Series M, includes pivot pin	R432007818	5	1
26	Pivot bracket kit 3/4, 7/8, 1-1/16 bores Series M, includes pivot pin	R432007817	5	1
26	Pivot bracket kit 7/16, 9/16 bores Series M, includes pivot pin	R432007816	5	1
26	Pivot bracket kit, 2" bore Series M, includes pivot pin	R432007820	5	1
26	Rod clevis kit, #10-32, for 7/16, 9/16 bores Series M	R432007806	5	1
26	Rod clevis kit, 1/2"-20 for 2" bore Series M	R432007810	5	1
26	Rod clevis kit, 1/4"-20 for 3/4, 7/8 bores Series M	R432007807	5	1
26	Rod clevis kit, 5/16"-24 for 1-1/16 bore Series M	R432007808	5	1
26	Rod clevis kit, 7/16"-20 for 1-1/4, 1-1/2 bores Series M	R432007809	8	2
	Series MNI Metric Min Cylinders 			
27	Ball eye rod end for M10 thread for (25mm bore Series MNI)	1822124003	5	1
27	Ball eye rod end for M6 thread (for 16mm bore Series MNI)	1822124001	5	1
27	Ball eye rod end for M8 thread (for 20mm bore Series MNI)	1822124002	5	1
27	CB1-MNI-012-012-ST6 switch clamp for 12mm bore MNI	1827020297	4	1
27	CB1-MNI-016-016-ST6 switch clamp for 16mm bore MNI	1827020298	4	1
27	CB1-MNI-020-020-ST6 switch clamp for 20mm bore MNI	1827020299	4	1
27	CB1-MNI-025-025-ST6 switch clamp for 25mm bore MNI	1827020300	4	1
27	Clevis mount for 12 & 16mm bore ISO 6432 cylinders	1827001446	5	1

GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
27	Clevis mount for 20 & 25mm bore ISO 6432 cylinders	1827001445	5	1
27	Flange mount for 12 & 16mm bore ISO 6432 cylinders	1821036011	5	1
27	Flange mount for 20 & 25mm bore ISO 6432 cylinders	1821036010	5	1
27	Foot mount for 12 & 16mm bore ISO 6432 cylinders	1821332028	5	1
27	Foot mount for 20 & 25mm bore ISO 6432 cylinders	1821332027	5	1
27	MNI-DA-012-0010, dbl. acting 12mm bore x 10mm stroke, magnetic piston	0822331201	2	1
27	MNI-DA-012-0025, dbl. acting 12mm bore x 25mm stroke, magnetic piston	0822331202	2	1
27	MNI-DA-016-0010 Series MNI cyl., dbl. acting 16mm bore x 10mm stroke	0822032201	5	1
27	MNI-DA-016-0010, dbl. acting 16mm bore x 10mm stroke, magnetic piston	0822332201	2	1
27	MNI-DA-016-0025 Series MNI cyl., dbl. acting 16mm bore x 25mm stroke	0822032202	5	1
27	MNI-DA-016-0025, dbl. acting 16mm bore x 25mm stroke, magnetic piston	0822332202	2	1
27	MNI-DA-016-0050 Series MNI cyl., dbl. acting 16mm bore x 50mm stroke	0822032203	5	1
27	MNI-DA-016-0050, dbl. acting 16mm bore x 50mm stroke, magnetic piston	0822332203	2	1
27	MNI-DA-016-0080 Series MNI cyl., dbl. acting 16mm bore x 80mm stroke	0822032204	5	1
27	MNI-DA-016-0100 Series MNI cyl., dbl. acting 16mm bore x 100mm stroke	0822032205	5	1
27	MNI-DA-020-0010 Series MNI cyl., dbl. acting 20mm bore x 10mm stroke	0822033201	5	1
27	MNI-DA-020-0010, dbl. acting 20mm bore x 10mm stroke, magnetic piston	0822333201	2	1
27	MNI-DA-020-0025 Series MNI cyl., dbl. acting 20mm bore x 25mm stroke	0822033202	5	1
27	MNI-DA-020-0025, dbl. acting 20mm bore x 25mm stroke, magnetic piston	0822333202	2	1
27	MNI-DA-020-0050 Series MNI cyl., dbl. acting 20mm bore x 50mm stroke	0822033203	5	1
27	MNI-DA-020-0050, dbl. acting 20mm bore x 50mm stroke, magnetic piston	0822333203	2	1
27	MNI-DA-020-0080 Series MNI cyl., dbl. acting 20mm bore x 80mm stroke	0822033204	5	1
27	MNI-DA-020-0080, dbl. acting 20mm bore x 80mm stroke, magnetic piston	0822333204	2	1
27	MNI-DA-020-0100 Series MNI cyl., dbl. acting 20mm bore x 100mm stroke	0822033205	5	1
27	MNI-DA-020-0140 Series MNI cyl. dbl. acting 20mm bore x 140mm stroke	0822233030	5	1
27	MNI-DA-025-0010 Series MNI cyl., dbl. acting 25mm bore x 10mm stroke	0822034201	5	1
27	MNI-DA-025-0010, dbl. acting 25mm bore x 10mm stroke, magnetic piston	0822334201	2	1
27	MNI-DA-025-0025 Series MNI cyl. dbl. acting 25mm bore x 25mm stroke, adj. cushions	0822334502	5	1
27	MNI-DA-025-0025 Series MNI cyl., dbl. acting 25mm bore x 25mm stroke	0822034202	5	1
27	MNI-DA-025-0025, dbl. acting 25mm bore x 25mm stroke, magnetic piston	0822334202	2	1
27	MNI-DA-025-0050 Series MNI cyl. dbl. acting 25mm bore x 50mm stroke, adj. cushions	0822234003	5	1
27	MNI-DA-025-0050 Series MNI cyl., dbl. acting 25mm bore x 50mm stroke	0822034203	5	1
27	MNI-DA-025-0050, dbl. acting 25mm bore x 50mm stroke, magnetic piston	0822334203	2	1
27	MNI-DA-025-0080 Series MNI cyl., dbl. acting 25mm bore x 80mm stroke	0822034204	5	1
27	MNI-DA-025-0080, dbl. acting 25mm bore x 80mm stroke, magnetic piston	0822334204	2	1
27	MNI-DA-025-0100 Series MNI cyl., dbl. acting 25mm bore x 100mm stroke	0822034205	5	1
27	MNI-DA-025-0100, dbl. acting 25mm bore x 100mm stroke, magnetic piston	0822334205	2	1
27	MNI-DA-025-0160, dbl. acting 25mm bore x 160mm stroke, magnetic piston	0822334207	2	1
27	Rod clevis for M10 thread (for 25mm bore Series MNI)	1822122024	5	1
27	Rod clevis for M6 thread (for 16mm bore Series MNI)	1822122009	5	1
27	Rod clevis for M8 thread (for 20mm bore Series MNI)	1822122010	5	1

GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
27	Single-Ended cable, 3 meter, M8 female connector, 3-pin, right angle	1834484167	10	1
27	Single-Ended cable, 3 meter, M8 female connector, 3-pin, straight	1834484166	10	1
27	Single-Ended cable, 5 meter, M8 female connector, 3-pin, right angle	1834484169	10	1
27	Single-Ended cable, 5 meter, M8 female connector, 3-pin, straight	1834484168	10	1
27	ST6-NP-K05U-030 ST6 NPN proximity switch, 5 meter PUR cable	0830100634	10	1
27	ST6-PN-K05U-030 ST6 PNP prox. switch, 5 meter PUR cable	0830100632	10	1
27	ST6-PN-M08R-030 ST6 PNP prox. switch, 0.3 meter PUR cable, 3-pin quick	0830100489	10	1
27	ST6-PN-M08T-030 ST6 PNP prox. switch, 0.3 meter PUR cable, 3-pin M8	0830100435	10	1
27	ST6-PN-M08U-030 ST6 PNP prox. switch, 0.5 meter PUR cable, 3-pin M8	0830100437	10	1
27	ST6-PN-M12R-030 ST6 PNP prox. switch, 0.3 meter PUR cable, 3-pin M12	0830100433	10	1
27	ST6-R3-K03U-030 ST6 reed proximity switch, 3 meter PUR cable	0830100629	10	1
27	ST6-R3-K05U-030 ST6 reed proximity switch, 5 meter PUR cable	0830100630	10	1
27	ST6-R3-M08R-030 ST6 reed prox. switch, 0.3 meter PUR cable, 3-pin quick	0830100488	10	1
27	ST6-R3-M08T-030 ST6 reed prox. switch, 0.3 meter PUR cable, 3-pin M8	0830100434	10	1
	 Series PRA and TRB ISO 15552 Cylinders			
28	CB1-TRB-032-040-ST6 TRB switch bracket 32-40mm	1827020282	10	1
28	CB1-TRB-050-063-ST6 TRB switch bracket 50-63mm	1827020283	10	1
28	CB1-TRB-080-100-ST6 TRB switch bracket 80-100mm	1827020284	10	1
28	CB1-TRB-125-125-ST6 TRB switch bracket 125mm	1827020292	10	1
28	CM1-AA4-032-M2-A, pivot pin for 32mm bore MP2 mount	1823120020	5	1
28	CM1-AA4-040-M2-A, pivot pin for 40mm bore MP2 mount	1823120021	5	1
28	CM1-AA4-050-M2-A, pivot pin for 50mm bore MP2 mount	1823120022	5	1
28	CM1-AA4-063-M2-A, pivot pin for 63mm bore MP2 mount	1823120023	5	1
28	CM1-AA4-080-M2-A, pivot pin for 80mm bore MP2 mount	1823120024	5	1
28	CM1-AA4-100-M2-A, pivot pin for 100mm bore MP2 mount	1823120025	5	1
28	CM1-AA4-125-M2-A, pivot pin for 125mm bore MP2 mount	5236000092	5	1
28	CM1-AB7-032-M1-A, AB7 fixed bearing block for 32 bore	1825805275	5	1
28	CM1-AB7-040-M1-A, AB7 fixed bearing block for 40 bore	1825805276	5	1
28	CM1-AB7-050-M1-A, AB7 fixed bearing block for 50 bore	1825805277	5	1
28	CM1-AB7-063-M1-A, AB7 fixed bearing block for 63 bore	1825805278	5	1
28	CM1-AB7-080-M1-A, AB7 fixed bearing block for 80 bore	1825805279	5	1
28	CM1-AB7-100-M1-A, AB7 fixed bearing block for 100 bore	1825805280	5	1
28	CM1-AB7-125-M1-A, AB7 fixed bearing block for 125 bore	1825805281	5	1
28	CM1-MF1-032-M2-A, MF1 Flange for 32mm bore	1827001277	5	1
28	CM1-MF1-040-M2-A, MF1 Flange for 40mm bore	1827001278	5	1
28	CM1-MF1-050-M2-A, MF1 Flange for 50mm bore	1827001279	5	1
28	CM1-MF1-063-M2-A, MF1 Flange for 63mm bore	1827001499	5	1
28	CM1-MF1-080-M2-A, MF1 Flange for 80mm bore	1827001281	5	1
28	CM1-MF1-100-M2-A, MF1 Flange for 100mm bore	1827001282	5	1
28	CM1-MF1-125-M2-A, MF1 Flange for 125mm bore	1827004861	5	1

GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
28	CM1-MP2-032-M4-N-ISO15552, MP2 mount for 32 mm bore	1827001289	5	1
28	CM1-MP2-040-M4-N-ISO15552, MP2 mount for 40 mm bore	1827001290	5	1
28	CM1-MP2-050-M4-N-ISO15552, MP2 mount for 50 mm bore	1827001291	5	1
28	CM1-MP2-063-M4-N-ISO15552, MP2 mount for 63 mm bore	1827001500	5	1
28	CM1-MP2-080-M4-N-ISO15552, MP2 mount for 80 mm bore	1827001293	5	1
28	CM1-MP2-100-M4-N-ISO15552, MP2 mount for 100 mm bore	1827001294	5	1
28	CM1-MP2-125-M4-N-ISO15552, MP2 mount for 125 mm bore	1827004862	5	1
28	CM1-MP4-032-M4-N-ISO15552, MP4 rear eye for 32 bore	1827001283	5	1
28	CM1-MP4-040-M4-N-ISO15552, MP4 rear eye for 40 bore	1827001284	5	1
28	CM1-MP4-050-M4-N-ISO15552, MP4 rear eye for 50 bore	1827001285	5	1
28	CM1-MP4-063-M4-N-ISO15552, MP4 rear eye for 63 bore	1827020086	5	1
28	CM1-MP4-080-M4-N-ISO15552, MP4 rear eye for 80 bore	1827001287	5	1
28	CM1-MP4-100-M4-N-ISO15552, MP4 rear eye for 100 bore	1827001288	5	1
28	CM1-MP4-125-M4-N-ISO15553, MP4 rear eye for 125 bore	1827004866	5	1
28	CM1-MS1-032-M2-A, MS1 foot mount for 32 mm bore	1827001271	5	1
28	CM1-MS1-040-M2-A, MS1 foot mount for 40 mm bore	1827001272	5	1
28	CM1-MS1-050-M2-A, MS1 foot mount for 50 mm bore	1827001273	5	1
28	CM1-MS1-063-M2-A, MS1 foot mount for 63 mm bore	1827001498	5	1
28	CM1-MS1-080-M2-A, MS1 foot mount for 80 mm bore	1827001275	5	1
28	CM1-MS1-100-M2-A, MS1 foot mount for 100 mm bore	1827001276	5	1
28	CM1-MS1-125-M2-A, MS1 foot mount for 125 mm bore	1827001310	5	1
28	CM2-AP6-M010-M2-A, swivel rod eye for 32mm bore metric	1822124003	5	1
28	CM2-AP6-M012-M2-A, swivel rod eye for 40mm bore metric	1822124004	5	1
28	CM2-AP6-M016-M2-A, swivel rod eye for 50mm, 63mm bore	1822124005	5	1
28	CM2-AP6-M020-M2-A, swivel rod eye for 80mm, 100mm bore	1822124006	5	1
28	CM2-AP6-M027-M2-A, swivel rod eye for 125mm bore	1822124013	5	1
28	CM2-PM1-M010-M2-A, rod clevis w/pin for 32mm bore metric	1822122024	5	1
28	CM2-PM1-M012-M2-A, rod clevis w/pin for 40mm bore metric	1822122025	5	1
28	CM2-PM1-M016-M2-A, rod clevis w/pin for 50mm, 63mm bore	1822122005	5	1
28	CM2-PM1-M020-M2-A, rod clevis w/pin for 80mm,100mm bore	1822122004	5	1
28	CM2-PM1-M027-M2-A, rod clevis w/pin for 125mm bore metric	1827001493	5	1
28	CM2-PM5-M010-M2-A, PM5 rod aligner for 32 bore	1826409002	5	1
28	CM2-PM5-M012-M2-A, PM5 rod aligner for 40 bore	1826409003	5	1
28	CM2-PM5-M016-M2-A, PM5 rod aligner for 50 & 63 bore	1826409004	5	1
28	CM2-PM5-M020-M2-A, PM5 rod aligner for 80 & 100 bore	1826409005	5	1
28	CM2-PM5-M027-M2-A, PM5 rod aligner for 125 bore	1826409006	5	1
28	new Pivot pin, 1/2" for 32mm & 40mm bore inch rod clevis kit	R433012619	5	1
28	Pivot pin, 1/2" for 32mm and 40mm bore inch rod clevis kit	R433012621	5	1
28	Pivot pin, 3/4" for 50mm, 63mm, 80mm and 100mm bore inch rod clevis kit	R433012623	5	1
28	PRA-DA-032-0050-0-2-2-1-1-1-BAS 32 mm x 50 mm profile cyl. cushioned	0822120002	5	3
28	PRA-DA-032-0080-0-2-2-1-1-1-BAS 32 mm x 80 mm profile cyl. cushioned	0822120003	5	3
28	PRA-DA-032-0100-0-2-2-1-1-1-BAS 32 mm x 100 mm profile cyl. cushioned	0822120004	5	3
28	PRA-DA-032-0125-0-2-2-1-1-1-BAS 32 mm x 125 mm profile cyl. cushioned	0822120005	5	3

GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
28	PRA-DA-032-0160-0-2-2-1-1-1-BAS 32 mm x 160 mm profile cyl. cushioned	0822120006	5	3
28	PRA-DA-032-0200-0-2-2-1-1-1-BAS 32 mm x 200 mm profile cyl. cushioned	0822120007	5	3
28	PRA-DA-032-0250-0-2-2-1-1-1-BAS 32 mm x 250 mm profile cyl. cushioned	0822120008	5	3
28	PRA-DA-032-0320-0-2-2-1-1-1-BAS 32 mm x 320 mm profile cyl. cushioned	0822120009	5	3
28	PRA-DA-032-0400-0-2-2-1-1-1-BAS 32 mm x 400 mm profile cyl. cushioned	0822120010	5	3
28	PRA-DA-032-0500-0-2-2-1-1-1-BAS 32 mm x 500 mm profile cyl. cushioned	0822120011	5	3
28	PRA-DA-040-0025-0-2-2-1-1-1-BAS 40 mm x 25 mm profile cyl. cushioned	0822121001	5	3
28	PRA-DA-040-0050-0-2-2-1-1-1-BAS 40 mm x 50 mm profile cyl. cushioned	0822121002	5	3
28	PRA-DA-040-0080-0-2-2-1-1-1-BAS 40 mm x 80 mm profile cyl. cushioned	0822121003	5	3
28	PRA-DA-040-0100-0-2-2-1-1-1-BAS 40 mm x 100 mm profile cyl. cushioned	0822121004	5	3
28	PRA-DA-040-0125-0-2-2-1-1-1-BAS 40 mm x 125 mm profile cyl. cushioned	0822121005	5	3
28	PRA-DA-040-0160-0-2-2-1-1-1-BAS 40 mm x 160 mm profile cyl. cushioned	0822121006	5	3
28	PRA-DA-040-0200-0-2-2-1-1-1-BAS 40 mm x 200 mm profile cyl. cushioned	0822121007	5	3
28	PRA-DA-040-0250-0-2-2-1-1-1-BAS 40 mm x 250 mm profile cyl. cushioned	0822121008	5	3
28	PRA-DA-040-0320-0-2-2-1-1-1-BAS 40 mm x 320 mm profile cyl. cushioned	0822121009	5	3
28	PRA-DA-040-0400-0-2-2-1-1-1-BAS 40 mm x 400 mm profile cyl. cushioned	0822121010	5	3
28	PRA-DA-040-0500-0-2-2-1-1-1-BAS 40 mm x 500 mm profile cyl. cushioned	0822121011	5	3
28	PRA-DA-050-0025-0-2-2-1-1-1-BAS 50 mm x 25 mm profile cyl. cushioned	0822122001	5	3
28	PRA-DA-050-0050-0-2-2-1-1-1-BAS 50 mm x 50 mm profile cyl. cushioned	0822122002	5	3
28	PRA-DA-050-0080-0-2-2-1-1-1-BAS 50 mm x 80 mm profile cyl. cushioned	0822122003	5	3
28	PRA-DA-050-0100-0-2-2-1-1-1-BAS 50 mm x 100 mm profile cyl. cushioned	0822122004	5	3
28	PRA-DA-050-0125-0-2-2-1-1-1-BAS 50 mm x 125 mm profile cyl. cushioned	0822122005	5	3
28	PRA-DA-050-0160-0-2-2-1-1-1-BAS 50 mm x 160 mm profile cyl. cushioned	0822122006	5	3
28	PRA-DA-050-0200-0-2-2-1-1-1-BAS 50 mm x 200 mm profile cyl. cushioned	0822122007	5	3
28	PRA-DA-050-0250-0-2-2-1-1-1-BAS 50 mm x 250 mm profile cyl. cushioned	0822122008	5	3
28	PRA-DA-050-0320-0-2-2-1-1-1-BAS 50 mm x 320 mm profile cyl. cushioned	0822122009	5	3
28	PRA-DA-050-0400-0-2-2-1-1-1-BAS 50 mm x 400 mm profile cyl. cushioned	0822122010	5	3
28	PRA-DA-050-0500-0-2-2-1-1-1-BAS 50 mm x 500 mm profile cyl. cushioned	0822122011	5	3
28	PRA-DA-063-0025-0-2-2-1-1-1-BAS 63 mm x 25 mm profile cyl. cushioned	0822123001	5	3
28	PRA-DA-063-0050-0-2-2-1-1-1-BAS 63 mm x 50 mm profile cyl. cushioned	0822123002	5	3
28	PRA-DA-063-0080-0-2-2-1-1-1-BAS 63 mm x 80 mm profile cyl. cushioned	0822123003	5	3
28	PRA-DA-063-0100-0-2-2-1-1-1-BAS 63 mm x 100 mm profile cyl. cushioned	0822123004	5	3
28	PRA-DA-063-0125-0-2-2-1-1-1-BAS 63 mm x 125 mm profile cyl. cushioned	0822123005	5	3
28	PRA-DA-063-0160-0-2-2-1-1-1-BAS 63 mm x 160 mm profile cyl. cushioned	0822123006	5	3
28	PRA-DA-063-0200-0-2-2-1-1-1-BAS 63 mm x 200 mm profile cyl. cushioned	0822123007	5	3
28	PRA-DA-063-0250-0-2-2-1-1-1-BAS 63 mm x 250 mm profile cyl. cushioned	0822123008	5	3
28	PRA-DA-063-0320-0-2-2-1-1-1-BAS 63 mm x 320 mm profile cyl. cushioned	0822123009	5	3
28	PRA-DA-063-0400-0-2-2-1-1-1-BAS 63 mm x 400 mm profile cyl. cushioned	0822123010	5	3
28	PRA-DA-063-0500-0-2-2-1-1-1-BAS 63 mm x 500 mm profile cyl. cushioned	0822123011	5	3
28	PRA-DA-080-0025-0-2-2-1-1-1-BAS 80 mm x 25 mm profile cyl. cushioned	0822124001	5	3
28	PRA-DA-080-0050-0-2-2-1-1-1-BAS 80 mm x 50 mm profile cyl. cushioned	0822124002	5	3
28	PRA-DA-080-0080-0-2-2-1-1-1-BAS 80 mm x 80 mm profile cyl. cushioned	0822124003	5	3
28	PRA-DA-080-0100-0-2-2-1-1-1-BAS 80 mm x 100 mm profile cyl. cushioned	0822124004	5	3

GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
28	PRA-DA-080-0125-0-2-2-1-1-1-BAS 80 mm x 125 mm profile cyl. cushioned	0822124005	5	3
28	PRA-DA-080-0160-0-2-2-1-1-1-BAS 80 mm x 160 mm profile cyl. cushioned	0822124006	5	3
28	PRA-DA-080-0200-0-2-2-1-1-1-BAS 80 mm x 200 mm profile cyl. cushioned	0822124007	5	3
28	PRA-DA-080-0250-0-2-2-1-1-1-BAS 80 mm x 250 mm profile cyl. cushioned	0822124008	5	3
28	PRA-DA-080-0320-0-2-2-1-1-1-BAS 80 mm x 320 mm profile cyl. cushioned	0822124009	5	3
28	PRA-DA-080-0400-0-2-2-1-1-1-BAS 80 mm x 400 mm profile cyl. cushioned	0822124010	5	3
28	PRA-DA-100-0025-0-2-2-1-1-1-BAS 100 mm x 25 mm profile cyl. cushioned	0822125001	5	3
28	PRA-DA-100-0050-0-2-2-1-1-1-BAS 100 mm x 50 mm profile cyl. cushioned	0822125002	5	3
28	PRA-DA-100-0080-0-2-2-1-1-1-BAS 100 mm x 80 mm profile cyl. cushioned	0822125003	5	3
28	PRA-DA-100-0100-0-2-2-1-1-1-BAS 100 mm x 100 mm profile cyl. cushioned	0822125004	5	3
28	PRA-DA-100-0125-0-2-2-1-1-1-BAS 100 mm x 125 mm profile cyl. cushioned	0822125005	5	3
28	PRA-DA-100-0160-0-2-2-1-1-1-BAS 100 mm x 160 mm profile cyl. cushioned	0822125006	5	3
28	PRA-DA-100-0200-0-2-2-1-1-1-BAS 100 mm x 200 mm profile cyl. cushioned	0822125007	5	3
28	PRA-DA-100-0250-0-2-2-1-1-1-BAS 100 mm x 250 mm profile cyl. cushioned	0822125008	5	3
28	PRA-DA-100-0320-0-2-2-1-1-1-BAS 100 mm x 320 mm profile cyl. cushioned	0822125009	5	3
28	PRA-DA-100-0400-0-2-2-1-1-1-BAS 100 mm x 400 mm profile cyl. cushioned	0822125010	5	3
28	PRA-DA-125-0025-0-2-2-1-1-1-BAS 125 mm x 25 mm profile cyl. cushioned	R480140491	5	5
28	PRA-DA-125-0050-0-2-2-1-1-1-BAS 125 mm x 50 mm profile cyl. cushioned	R480140455	5	5
28	PRA-DA-125-0080-0-2-2-1-1-1-BAS 125 mm x 80 mm profile cyl. cushioned	R480141371	5	5
28	PRA-DA-125-0100-0-2-2-1-1-1-BAS 125 mm x 100 mm profile cyl. cushioned	R480079499	5	5
28	PRA-DA-125-0125-0-2-2-1-1-1-BAS 125 mm x 125 mm profile cyl. cushioned	R480140083	5	5
28	PRA-DA-125-0160-0-2-2-1-1-1-BAS 125 mm x 160 mm profile cyl. cushioned	R480079809	5	5
28	PRA-DA-125-0200-0-2-2-1-1-1-BAS 125 mm x 200 mm profile cyl. cushioned	R480140833	5	5
28	PRA-DA-125-0250-0-2-2-1-1-1-BAS 125 mm x 250 mm profile cyl. cushioned	R480141106	5	5
28	PRA-DA-125-0320-0-2-2-1-1-1-BAS 125 mm x 320 mm profile cyl. cushioned	R480140759	5	5
28	PRA-DA-125-0400-0-2-2-1-1-1-BAS 125 mm x 400 mm profile cyl. cushioned	R480141373	5	5
28	PRA-DA-125-0500-0-2-2-1-1-1-BAS 125 mm x 500 mm profile cyl. cushioned	R480141666	5	5
28	Rod clevis kit, 1"-14 for 125mm bore inch	R433012604	5	1
28	Rod clevis kit, 1/2"-20 for 40mm bore inch	R433012665	5	1
28	Rod clevis kit, 3/4"-16 for 50mm, 63mm, 80mm and 100mm bore inch	R433012603	5	1
28	Rod clevis kit, 7/16"-20 for 32mm bore inch	R433012602	5	1
28	Series PRA ISO cylinders, 125 mm bore, stroke <=500mm, configure online	Configurable	5	5
28	Series PRA ISO cylinders, 32 to 100 mm bore, stroke <=500mm, configure online	Configurable	5	3
28	new Series PRA ISO cylinders, 32 to 100 mm bore, stroke between 500mm and 1000mm, configure online	Configurable	3	5
28	Series TRB ISO cylinders, 32 to 125 mm bore, stroke <=500mm, configure online	Configurable	5	5
28	Single-Ended cable, 3 meter, M8 female connector, 3-pin, right angle	1834484167	10	1
28	Single-Ended cable, 3 meter, M8 female connector, 3-pin, straight	1834484166	10	1
28	Single-Ended cable, 5 meter, M8 female connector, 3-pin, right angle	1834484169	10	1
28	Single-Ended cable, 5 meter, M8 female connector, 3-pin, straight	1834484168	10	1
28	ST6-NP-K05U-030 ST6 NPN proximity switch, 5 meter PUR cable	0830100634	10	1
28	ST6-PN-K05U-030 ST6 PNP prox. switch, 5 meter PUR cable	0830100632	10	1


GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
28	ST6-PN-M08R-030 ST6 PNP prox. switch, 0.3 meter PUR cable, 3-pin quick	0830100489	10	1
28	ST6-PN-M08T-030 ST6 PNP prox. switch, 0.3 meter PUR cable, 3-pin M8	0830100435	10	1
28	ST6-PN-M08U-030 ST6 PNP prox. switch, 0.5 meter PUR cable, 3-pin M8	0830100437	10	1
28	ST6-PN-M12R-030 ST6 PNP prox. switch, 0.3 meter PUR cable, 3-pin M12	0830100433	10	1
28	ST6-R3-K03U-030 ST6 reed proximity switch, 3 meter PUR cable	0830100629	10	1
28	ST6-R3-K05U-030 ST6 reed proximity switch, 5 meter PUR cable	0830100630	10	1
28	ST6-R3-M08R-030 ST6 reed prox. switch, 0.3 meter PUR cable, 3-pin quick	0830100488	10	1
28	ST6-R3-M08T-030 ST6 reed prox. switch, 0.3 meter PUR cable, 3-pin M8	0830100434	10	1
28	TRB-DA-032-0025-0-2-2-1-1-1-BAS 32 mm x 25 mm tie-rod cyl. cushioned	0822340001	5	5
28	TRB-DA-032-0050-0-2-2-1-1-1-BAS 32 mm x 50 mm tie-rod cyl. cushioned	0822340002	5	5
28	TRB-DA-032-0080-0-2-2-1-1-1-BAS 32 mm x 80 mm tie-rod cyl. cushioned	0822340003	5	5
28	TRB-DA-032-0100-0-2-2-1-1-1-BAS 32 mm x 100 mm tie-rod cyl. cushioned	0822340004	5	5
28	TRB-DA-032-0125-0-2-2-1-1-1-BAS 32 mm x 125 mm tie-rod cyl. cushioned	0822340005	5	5
28	TRB-DA-032-0160-0-2-2-1-1-1-BAS 32 mm x 160 mm tie-rod cyl. cushioned	0822340006	5	5
28	TRB-DA-032-0200-0-2-2-1-1-1-BAS 32 mm x 200 mm tie-rod cyl. cushioned	0822340007	5	5
28	TRB-DA-032-0250-0-2-2-1-1-1-BAS 32 mm x 250 mm tie-rod cyl. cushioned	0822340008	5	5
28	TRB-DA-032-0320-0-2-2-1-1-1-BAS 32 mm x 320 mm tie-rod cyl. cushioned	0822340009	5	5
28	TRB-DA-032-0400-0-2-2-1-1-1-BAS 32 mm x 400 mm tie-rod cyl. cushioned	0822340010	5	5
28	TRB-DA-040-0025-0-2-2-1-1-1-BAS 40 mm x 25 mm tie-rod cyl. cushioned	0822341001	5	5
28	TRB-DA-040-0050-0-2-2-1-1-1-BAS 40 mm x 50 mm tie-rod cyl. cushioned	0822341002	5	5
28	TRB-DA-040-0080-0-2-2-1-1-1-BAS 40 mm x 80 mm tie-rod cyl. cushioned	0822341003	5	5
28	TRB-DA-040-0100-0-2-2-1-1-1-BAS 40 mm x 100 mm tie-rod cyl. cushioned	0822341004	5	5
28	TRB-DA-040-0125-0-2-2-1-1-1-BAS 40 mm x 125 mm tie-rod cyl. cushioned	0822341005	5	5
28	TRB-DA-040-0160-0-2-2-1-1-1-BAS 40 mm x 160 mm tie-rod cyl. cushioned	0822341006	5	5
28	TRB-DA-040-0200-0-2-2-1-1-1-BAS 40 mm x 200 mm tie-rod cyl. cushioned	0822341007	5	5
28	TRB-DA-040-0250-0-2-2-1-1-1-BAS 40 mm x 250 mm tie-rod cyl. cushioned	0822341008	5	5
28	TRB-DA-040-0320-0-2-2-1-1-1-BAS 40 mm x 320 mm tie-rod cyl. cushioned	0822341009	5	5
28	TRB-DA-040-0400-0-2-2-1-1-1-BAS 40 mm x 400 mm tie-rod cyl. cushioned	0822341010	5	5
28	TRB-DA-040-0500-0-2-2-1-1-1-BAS 40 mm x 500 mm tie-rod cyl. cushioned	0822341011	5	5
28	TRB-DA-050-0025-0-2-2-1-1-1-BAS 50 mm x 25 mm tie-rod cyl. cushioned	0822342001	5	5
28	TRB-DA-050-0050-0-2-2-1-1-1-BAS 50 mm x 50 mm tie-rod cyl. cushioned	0822342002	5	5
28	TRB-DA-050-0080-0-2-2-1-1-1-BAS 50 mm x 80 mm tie-rod cyl. cushioned	0822342003	5	5
28	TRB-DA-050-0100-0-2-2-1-1-1-BAS 50 mm x 100 mm tie-rod cyl. cushioned	0822342004	5	5
28	TRB-DA-050-0125-0-2-2-1-1-1-BAS 50 mm x 125 mm tie-rod cyl. cushioned	0822342005	5	5
28	TRB-DA-050-0160-0-2-2-1-1-1-BAS 50 mm x 160 mm tie-rod cyl. cushioned	0822342006	5	5
28	TRB-DA-050-0200-0-2-2-1-1-1-BAS 50 mm x 200 mm tie-rod cyl. cushioned	0822342007	5	5
28	TRB-DA-050-0250-0-2-2-1-1-1-BAS 50 mm x 250 mm tie-rod cyl. cushioned	0822342008	5	5
28	TRB-DA-050-0320-0-2-2-1-1-1-BAS 50 mm x 320 mm tie-rod cyl. cushioned	0822342009	5	5
28	TRB-DA-050-0400-0-2-2-1-1-1-BAS 50 mm x 400 mm tie-rod cyl. cushioned	0822342010	5	5
28	TRB-DA-050-0500-0-2-2-1-1-1-BAS 50 mm x 500 mm tie-rod cyl. cushioned	0822342011	5	5
28	TRB-DA-063-0025-0-2-2-1-1-1-BAS 63 mm x 25 mm tie-rod cyl. cushioned	0822343001	5	5
28	TRB-DA-063-0050-0-2-2-1-1-1-BAS 63 mm x 50 mm tie-rod cyl. cushioned	0822343002	5	5
28	TRB-DA-063-0080-0-2-2-1-1-1-BAS 63 mm x 80 mm tie-rod cyl. cushioned	0822343003	5	5


GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
28	TRB-DA-063-0100-0-2-2-1-1-1-BAS 63 mm x 100 mm tie-rod cyl. cushioned	0822343004	5	5
28	TRB-DA-063-0125-0-2-2-1-1-1-BAS 63 mm x 125 mm tie-rod cyl. cushioned	0822343005	5	5
28	TRB-DA-063-0160-0-2-2-1-1-1-BAS 63 mm x 160 mm tie-rod cyl. cushioned	0822343006	5	5
28	TRB-DA-063-0200-0-2-2-1-1-1-BAS 63 mm x 200 mm tie-rod cyl. cushioned	0822343007	5	5
28	TRB-DA-063-0250-0-2-2-1-1-1-BAS 63 mm x 250 mm tie-rod cyl. cushioned	0822343008	5	5
28	TRB-DA-063-0320-0-2-2-1-1-1-BAS 63 mm x 320 mm tie-rod cyl. cushioned	0822343009	5	5
28	TRB-DA-063-0400-0-2-2-1-1-1-BAS 63 mm x 400 mm tie-rod cyl. cushioned	0822343010	5	5
28	TRB-DA-063-0500-0-2-2-1-1-1-BAS 63 mm x 500 mm tie-rod cyl. cushioned	0822343011	5	5
28	TRB-DA-080-0025-0-2-2-1-1-1-BAS 80 mm x 25 mm tie-rod cyl. cushioned	0822344001	5	5
28	TRB-DA-080-0050-0-2-2-1-1-1-BAS 80 mm x 50 mm tie-rod cyl. cushioned	0822344002	5	5
28	TRB-DA-080-0080-0-2-2-1-1-1-BAS 80 mm x 80 mm tie-rod cyl. cushioned	0822344003	5	5
28	TRB-DA-080-0100-0-2-2-1-1-1-BAS 80 mm x 100 mm tie-rod cyl. cushioned	0822344004	5	5
28	TRB-DA-080-0125-0-2-2-1-1-1-BAS 80 mm x 125 mm tie-rod cyl. cushioned	0822344005	5	5
28	TRB-DA-080-0160-0-2-2-1-1-1-BAS 80 mm x 160 mm tie-rod cyl. cushioned	0822344006	5	5
28	TRB-DA-080-0200-0-2-2-1-1-1-BAS 80 mm x 200 mm tie-rod cyl. cushioned	0822344007	5	5
28	TRB-DA-080-0250-0-2-2-1-1-1-BAS 80 mm x 250 mm tie-rod cyl. cushioned	0822344008	5	5
28	TRB-DA-080-0320-0-2-2-1-1-1-BAS 80 mm x 320 mm tie-rod cyl. cushioned	0822344009	5	5
28	TRB-DA-080-0400-0-2-2-1-1-1-BAS 80 mm x 400 mm tie-rod cyl. cushioned	0822344010	5	5
28	TRB-DA-080-0500-0-2-2-1-1-1-BAS 80 mm x 500 mm tie-rod cyl. cushioned	0822344011	5	5
28	TRB-DA-100-0025-0-2-2-1-1-1-BAS 100 mm x 25 mm tie-rod cyl. cushioned	0822345001	5	5
28	TRB-DA-100-0050-0-2-2-1-1-1-BAS 100 mm x 50 mm tie-rod cyl. cushioned	0822345002	5	5
28	TRB-DA-100-0080-0-2-2-1-1-1-BAS 100 mm x 80 mm tie-rod cyl. cushioned	0822345003	5	5
28	TRB-DA-100-0100-0-2-2-1-1-1-BAS 100 mm x 100 mm tie-rod cyl. cushioned	0822345004	5	5
28	TRB-DA-100-0125-0-2-2-1-1-1-BAS 100 mm x 125 mm tie-rod cyl. cushioned	0822345005	5	5
28	TRB-DA-100-0160-0-2-2-1-1-1-BAS 100 mm x 160 mm tie-rod cyl. cushioned	0822345006	5	5
28	TRB-DA-100-0200-0-2-2-1-1-1-BAS 100 mm x 200 mm tie-rod cyl. cushioned	0822345007	5	5
28	TRB-DA-100-0250-0-2-2-1-1-1-BAS 100 mm x 250 mm tie-rod cyl. cushioned	0822345008	5	5
28	TRB-DA-100-0320-0-2-2-1-1-1-BAS 100 mm x 320 mm tie-rod cyl. cushioned	0822345009	5	5
28	TRB-DA-100-0400-0-2-2-1-1-1-BAS 100 mm x 400 mm tie-rod cyl. cushioned	0822345010	5	5
28	TRB-DA-100-0500-0-2-2-1-1-1-BAS 100 mm x 500 mm tie-rod cyl. cushioned	0822345011	5	5
28	TRB-DA-125-0025-0-2-2-1-1-1-BAS 125 mm x 25 mm tie-rod cyl. cushioned	0822306201	5	5
28	TRB-DA-125-0050-0-2-2-1-1-1-BAS 125 mm x 50 mm tie-rod cyl. cushioned	0822306202	5	5
28	TRB-DA-125-0080-0-2-2-1-1-1-BAS 125 mm x 80 mm tie-rod cyl. cushioned	0822306203	5	5
28	TRB-DA-125-0100-0-2-2-1-1-1-BAS 125 mm x 100 mm tie-rod cyl. cushioned	0822306204	5	5
28	TRB-DA-125-0125-0-2-2-1-1-1-BAS 125 mm x 125 mm tie-rod cyl. cushioned	0822306205	5	5
28	TRB-DA-125-0160-0-2-2-1-1-1-BAS 125 mm x 160 mm tie-rod cyl. cushioned	0822306206	5	5
28	TRB-DA-125-0200-0-2-2-1-1-1-BAS 125 mm x 200 mm tie-rod cyl. cushioned	0822306207	5	5
28	TRB-DA-125-0250-0-2-2-1-1-1-BAS 125 mm x 250 mm tie-rod cyl. cushioned	0822306208	5	5
28	TRB-DA-125-0320-0-2-2-1-1-1-BAS 125 mm x 320 mm tie-rod cyl. cushioned	0822306209	5	5
28	TRB-DA-125-0400-0-2-2-1-1-1-BAS 125 mm x 400 mm tie-rod cyl. cushioned	0822306210	5	5
28	TRB-DA-125-0500-0-2-2-1-1-1-BAS 126 mm x 500 mm tie-rod cyl. cushioned	0822306211	5	5

GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
	Series RTC Rodless Cylinders 			
29	Adjustable articulated mount for 1-1/4" & 1-1/2" (32, 40mm) bore RTC	R402002404	2	1
29	Adjustable articulated mount for 2", 2-1/2" & 3" (50, 63, 80mm) bore RTC	R402002405	2	1
29	Adjustable articulated mount for 5/8" & 1" (16, 25mm) bore RTC	R402002403	2	1
29	Cable w/ M8 angled connector, 2.5 meter, for RTC	8946016212	4	1
29	Cable w/ M8 straight connector, 10 meter, for RTC	8946016122	5	1
29	Cable w/ M8 straight connector, 2.5 meter, for RTC	8946016112	5	1
29	End cover mount for 1-1/4" & 1-1/2" (32, 40mm) bore RTC	R402002729	2	1
29	End cover mount for 2-1/2" & 3" (63, 80mm) bore RTC	R402002731	2	1
29	End cover mount for 2" (50 mm) bore RTC	R402002730	2	1
29	End cover mount for 5/8" & 1"(16, 25mm) bore RTC	R402002728	2	1
29	Fitting, straight, M7 x 1/4" tube, 25/pack for RTC	R412004926	25	1
29	Foot mount kit M12 for 2", 2-1/2" & 3" (50, 63, 80mm) bore RTC	R402003403	2	1
29	Foot mount kit M6 for 5/8" & 1"(16, 2 mm) bore RTC	R402003401	2	1
29	Foot mount kit M8 for 1-1/4" & 1-1/2" (32, 40mm) bore RTC	R402003402	2	1
29	RTC cylinders 16 – 63mm (5/8" – 2-1/2") CG & HD version, stroke ≤1800mm (72")	Configurable	2	10
29	RTC cylinders 16 – 63mm (5/8" – 2-1/2") CG & HD version, stroke >1800mm (72") <3000mm (118")	Configurable	1	10
29	RTC cylinders 16 – 80mm (5/8" – 3") BV, RR & RI versions, stroke >1800mm (72") <3000mm (118")	Configurable	1	5
29	RTC cylinders 16 – 80mm (5/8" – 3") BV, RR & RI versions, stroke ≤ 1800mm (72")	Configurable	2	5
29	RTC-BV to RTC-RI (170 Series) 16 mm end cover mount adapter kit	R402003634	2	1
29	RTC-BV to RTC-RI (170 Series) 16 mm foot mount mount adapter kit	R402003609	6	1
29	RTC-BV to RTC-RI (170 Series) 25 mm end cover mount adapter kit	R402003635	2	1
29	RTC-BV to RTC-RI (170 Series) 25 mm foot mount mount adapter kit	R402003610	6	1
29	RTC-BV to RTC-RI (170 Series) 32 mm end cover mount adapter kit	R402003636	2	1
29	RTC-BV to RTC-RI (170 Series) 32 mm foot mount mount adapter kit	R402003611	6	1
29	RTC-BV to RTC-RI (170 Series) 40 mm end cover mount adapter kit	R402003637	2	1
29	RTC-BV to RTC-RI (170 Series) 40 mm foot mount mount adapter kit	R402003612	6	1
29	RTC-BV to RTC-RI (170 Series) 50 mm end cover mount adapter kit	R402003638	2	1
29	RTC-BV to RTC-RI (170 Series) 50 mm foot mount mount adapter kit	R402003613	6	1
29	RTC-BV to RTC-RI (170 Series) 63 mm end cover mount adapter kit	R402003639	2	1
29	RTC-BV to RTC-RI (170 Series) 63 mm foot mount mount adapter kit	R402003615	6	1
29	RTC-BV to RTC-RI (170 Series) 80 mm end cover mount adapter kit	R402003640	2	1
29	RTC-BV to RTC-RI (170 Series) 80 mm foot mount mount adapter kit	R402003616	6	1
29	RTC-BV to RTC-RR (RexMover) 16 mm end cover mount adapter kit	R402003429	2	1
29	RTC-BV to RTC-RR (RexMover) 16 mm foot mount adapter kit	R402003406	6	1
29	RTC-BV to RTC-RR (RexMover) 25 mm end cover mount adapter kit	R402003430	2	1
29	RTC-BV to RTC-RR (RexMover) 25 mm foot mount adapter kit	R402003407	6	1
29	RTC-BV to RTC-RR (RexMover) 32 mm end cover mount adapter kit	R402003431	2	1



GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
29	RTC-BV to RTC-RR (RexMover) 32-63 mm foot mount adapter kit	R402003408	6	1
29	RTC-BV to RTC-RR (RexMover) 40 mm end cover mount adapter kit	R402003432	2	1
29	RTC-BV to RTC-RR (RexMover) 50 mm end cover mount adapter kit	R402003433	2	1
29	RTC-BV to RTC-RR (RexMover) 63 mm end cover mount adapter kit	R402003434	2	1
29	RTC-BV to RTC-RR (RexMover) 80 mm end cover mount adapter kit	R402003435	2	1
29	RTC-BV to RTC-RR (RexMover) 80 mm foot mount adapter kit	R402003409	6	1
29	Shock Absorber Holder RTC-CG & HD16	R402002702	4	1
29	Shock Absorber Holder RTC-CG & HD25	R402002703	4	1
29	Shock Absorber Holder RTC-CG & HD32-40	R402002704	4	1
29	Shock Absorber Holder RTC-HD 50-63	R402003397	4	1
29	Shock Absorber Kit RTC D16 0-4KG	R402002804	4	1
29	Shock Absorber Kit RTC D16 M>4KG	R402003618	4	1
29	Shock Absorber Kit RTC D25-40 0-8KG	R402002805	4	1
29	Shock Absorber Kit RTC D25-40 M>8KG	R402003619	4	1
29	Shock Absorber Kit RTC D50-63 0-23KG	R402002806	4	1
29	Shock Absorber Kit RTC D50-63 M>23KG	R402003620	4	1
29	Shuttle angle bracket for 1-1/4", 1-1/2" and 2" (32, 40, 50mm) bore RTC	3174203000	5	1
29	Single-Ended cable, 3 meter, M8 female connector, 3-pin, right angle	1834484167	10	1
29	Single-Ended cable, 3 meter, M8 female connector, 3-pin, straight	1834484166	10	1
29	Single-Ended cable, 5 meter, M8 female connector, 3-pin, right angle	1834484169	10	1
29	Single-Ended cable, 5 meter, M8 female connector, 3-pin, straight	1834484168	10	1
29	ST4-NP-K03U-024 ST4 NPN prox. switch, 3 meter PUR cable	R412004989	4	1
29	ST4-NP-M08R-030 ST4 NPN prox. Switch, 0.3 meter PUR cable, 3 pin quick	R412004988	4	1
29	ST4-PN-K03U-030 ST4 PNP prox. switch, 3 meter PUR cable	0830100642	4	1
29	ST4-PN-K05U-030 ST4 PNP prox. switch, 5 meter PUR cable	0830100643	4	1
29	ST4-PN-M08R-030 ST4 PNP prox. switch, 0.3 meter PUR cable, 3-pin quick	0830100441	4	1
29	ST4-R3-K03U-030 ST4 reed proximity switch, 3 meter PUR cable	0830100640	4	1
29	ST4-R3-K05U-030 ST4 reed proximity switch, 5 meter PUR cable	0830100641	4	1
29	ST4-R3-M08R-030 ST4 reed prox. switch, 0.3 meter PUR cable, 3-pin quick	0830100440	4	1
29	ST4-R3-M08T-030 ST4 reed prox. switch, 0.3 meter PUR cable, 3-pin M8	R412004577	4	1
29	Stop bracket RTC-CG & HD16	R402002695	2	1
29	Stop bracket RTC-CG 40	R402002699	2	1
29	Stop bracket RTC-HD 32	R402002698	2	1
29	Stop bracket RTC-HD 40	R402002700	2	1
29	Stop bracket RTC-HD 50 & 63	R402002701	2	1
29	Stop bracket RTC-HD25 & CG25-32	R402002696	2	1
	TaskMaster® NFPA Compatible Cylinders 			
30	1/2" pivot pin for 1.5", 2.0" and 2.5" bore TaskMaster	R433012619	5	1
30	3/4" pivot pin for 3.25" and 4.0" bore TaskMaster	R433012621	5	1
30	30MA NPN output 9 ft. and clamp for TaskMaster	R432008730	10	1
30	30MA PNP output 9 ft. and clamp for TaskMaster	R432008729	10	1


GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
30	30MA Switch, proximity reed 12' PVC cable & clamp for TaskMaster	R432008725	6	1
30	500MA Switch, proximity reed 12' cable and clamp for TaskMaster	R432008721	10	1
30	Clevis bracket, aluminum for 1.5" bore TaskMaster	R432013366	5	1
30	Clevis bracket, aluminum for 2.0" bore TaskMaster	R432012511	5	1
30	Clevis bracket, aluminum for 2.5" bore TaskMaster	R432013381	5	1
30	Clevis bracket, aluminum for 3.25" bore TaskMaster	R432008891	5	1
30	Clevis bracket, aluminum for 4.0" bore TaskMaster	R432008893	5	1
30	Detachable Eye Mount for 3.25" bore TaskMaster	R432008890	5	1
30	Female rod clevis, aluminum w/pivot pin for 1.5",2.0" & 2.5" bore TM,1/2-20	R432012516	5	1
30	Female rod clevis, aluminum w/pivot pin for 3.25" and 4.0" bore TM, 7/8-14	R432013386	5	1
30	Female rod eye (steel) for 1.5", 2.0" and 2.5" bore TM (1/2-20 threads)	R432006533	5	1
30	Female rod eye (steel) for 3.25" and 4.0" bore TM (7/8-14 threads)	R432013437	5	1
30	MF1 Flange, aluminum for 1.5" bore TaskMaster	R432013373	5	1
30	MF1 Flange, aluminum for 2.0" bore TaskMaster	R432012520	5	1
30	MF1 Flange, aluminum for 2.5" bore TaskMaster	R432013382	5	1
30	MF1 Flange, aluminum for 3.25" bore TaskMaster	R432013388	5	1
30	MF1 Flange, aluminum for 4.0" bore TaskMaster	R432013396	5	1
30	MP1 clevis kit (cast iron) with pivot pin for 1.5" bore TaskMaster	R432015731	5	1
30	MP1 clevis kit (cast iron) with pivot pin for 2.0" bore TaskMaster	R432015733	5	1
30	MP1 clevis kit (cast iron) with pivot pin for 2.5" bore TaskMaster	R432015735	5	1
30	MP1 clevis kit (cast iron) with pivot pin for 3.25" bore TaskMaster	R432015737	5	1
30	MP1 clevis kit (cast iron) with pivot pin for 4.0" bore TaskMaster	R432015739	5	1
30	MP2 clevis kit, aluminum with pivot pin for 1.5" bore TaskMaster	R432013371	8	3
30	MP2 clevis kit, aluminum with pivot pin for 2.0" bore TaskMaster	R432012512	5	1
30	MP2 clevis kit, aluminum with pivot pin for 2.5" bore TaskMaster	R432013379	5	1
30	MP2 clevis kit, aluminum with pivot pin for 3.25" bore TaskMaster	R432013394	5	1
30	MP2 clevis kit, aluminum with pivot pin for 4.0" bore TaskMaster	R432013402	5	1
30	MS2 mounting kit (steel) for 1.5" bore TaskMaster	R432013616	5	1
30	MS2 mounting kit (steel) for 2.0" or 2.5" bore TaskMaster	R432013641	5	1
30	MS2 mounting kit (steel) for 3.25" bore TaskMaster	R432013648	5	1
30	MS2 mounting kit (steel) for 4.0" bore TaskMaster	R432013651	5	1
30	TaskMaster cylinders TM8 1.5" to 4" bore, configure online	Configurable	5	3
30	TM-811000-00010 1-1/2" bore 1" stroke, non-cushioned	R432021805	5	3
30	TM-811000-00020 1-1/2" bore 2" stroke, non-cushioned	R432021812	5	3
30	TM-811000-00030 1-1/2" bore 3" stroke, non-cushioned	R432021815	5	3
30	TM-811000-03040 1-1/2" bore 4" stroke, cushioned	R432021892	5	3
30	TM-811000-03060 1-1/2" bore 6" stroke, cushioned	R432021901	5	3
30	TM-811000-03080 1-1/2" bore 8" stroke, cushioned	R432021906	5	3
30	TM-811000-03100 1-1/2" bore 10" stroke, cushioned	R432021911	5	3
30	TM-811000-03120 1-1/2" bore 12" stroke, cushioned	R432021917	5	3
30	TM-821000-00010 2" bore 1" stroke, non-cushioned	R432022232	5	3
30	TM-821000-03020 2" bore 2" stroke, cushioned	R432022306	5	3
30	TM-821000-03030 2" bore 3" stroke, cushioned	R432022311	5	3

GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
30	TM-821000-03040 2" bore 4" stroke, cushioned	R432022318	5	3
30	TM-821000-03060 2" bore 6" stroke, cushioned	R432022327	5	3
30	TM-821000-03080 2" bore 8" stroke, cushioned	R432022332	5	3
30	TM-821000-03100 2" bore 10" stroke, cushioned	R432022337	5	3
30	TM-821000-03120 2" bore 12" stroke, cushioned	R432022341	5	3
30	TM-831000-00020 2-1/2" bore 2" stroke, non-cushioned	R432022619	5	3
30	TM-831000-03010 2-1/2" bore 1" stroke, cushioned	R432022673	5	3
30	TM-831000-03030 2-1/2" bore 3" stroke, cushioned	R432022680	5	3
30	TM-831000-03040 2-1/2" bore 4" stroke, cushioned	R432022686	5	3
30	TM-831000-03060 2-1/2" bore 6" stroke, cushioned	R432022691	5	3
30	TM-831000-03080 2-1/2" bore 8" stroke, cushioned	R432022699	5	3
30	TM-831000-03100 2-1/2" bore 10" stroke, cushioned	R432022703	5	3
30	TM-831000-03120 2-1/2" bore 12" stroke, cushioned	R432022708	5	3
30	TM-841000-00030 3-1/4" bore 3" stroke, non-cushioned	R432022910	5	3
30	TM-841000-03020 3-1/4" bore 2" stroke, cushioned	R432022964	5	3
30	TM-841000-03040 3-1/4" bore 4" stroke, cushioned	R432022973	5	3
30	TM-841000-03060 3-1/4" bore 6" stroke, cushioned	R432022981	5	3
30	TM-841000-03080 3-1/4" bore 8" stroke, cushioned	R432022989	5	3
30	TM-841000-03100 3-1/4" bore 10" stroke, cushioned	R432022994	5	3
30	TM-841000-03120 3-1/4" bore 12 inch stroke, cushioned	R432023002	5	3
30	TM-851000-03040 4" bore 4" stroke, cushioned	R432023314	5	3
30	TM-851000-03060 4" bore 6" stroke, cushioned	R432023320	5	3
30	TM-851000-03080 4" bore 8" stroke, cushioned	R432023325	5	3
30	TM-851000-03100 4" bore 10" stroke, cushioned	R432023331	5	3
30	TM-851000-03120 4" bore 12" stroke, cushioned	R432023336	5	3
	 Series NCT Non-Contact Transfer Units			
31	Non-Contact Transfer NCT20	2650100010	5	1
31	Non-Contact Transfer NCT30	2650100020	5	1
31	Non-Contact Transfer NCT40	2650100030	5	1
31	Non-Contact Transfer NCT60	2650100040	5	1
	 Series PE5 Pressure Switches			
32	Double nipple, G1/4 to 1/4" NPT, (mating to AS inch), order in mult. of 2	R412010018	4	1
32	Double nipple, G1/4 to G1/4, 2/pack (order in multiples of 2)	R412010016	4	1
32	Double nipple, G1/8 to G1/4, 2/pack (order in multiples of 2)	R412010015	4	1
32	PE5 elec. connector, M12 4-pin right angle, 5m cable with flying leads	1834484260	5	1
32	PE5 elec. connector, M12 4-pin straight, 5m cable with flying leads	1834484257	2	1
32	PE5 elec. connector, right angle, 3m cable with flying leads	1834484259	5	1
32	PE5 elec. connector, straight, 3m cable with flying leads	1834484256	5	1

GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
32	PE5 wall mounting bracket	R412010019	5	1
32	PE5-P2-DA04-000-100-M012 P. switch, 2x PNP, 4mm push-in	R412007978	5	1
32	PE5-P2-G014-000-100-M012 P. switch, 2x PNP, 1/4 BSPP	R412007979	5	1
32	PE5-P2-G014-V10-000-M012 Vacuum switch, 2x PNP, 1/4 BSPP	R412007991	5	1
32	PE5-PP-G014-000-100-M012 P. switch, PNP+analog, 1/4 BSPP	R412007987	5	1
				
	Flow Controls, Fittings, Tubing & Silencers			
33	1/2" OD Polyurethane tubing, blue, 50 feet (unit is package)	R432026250	5	1
33	1/2" OD Polyurethane tubing, clear, 50 feet (unit is package)	R432030140	5	1
33	1/4" OD Polyurethane tubing, blue, 100 feet (unit is package)	R432026248	5	1
33	1/4" OD Polyurethane tubing, clear, 100 feet (unit is package)	R432026252	5	1
33	1/8" OD Polyurethane tubing, blue, 50 feet (unit is package)	R432026247	5	1
33	1/8" OD Polyurethane tubing, clear, 50 feet (unit is package)	R432026251	5	1
33	3/8" OD Polyurethane tubing, blue, 100 feet (unit is package)	R432026249	5	1
33	3/8" OD Polyurethane tubing, clear, 100 feet (unit is package)	R432026253	5	1
33	5/16" OD Polyurethane tubing, blue, 100 meters (unit is meters)	1820712038	100 mtr.	1
33	5/16" OD Polyurethane tubing, clear, 100 meters (unit is meters)	1820712008	100 mtr.	1
33	5/32" OD Polyurethane tubing, blue, 25 meters (unit is meters)	1820712030	50 mtr.	1
33	5/32" OD Polyurethane tubing, clear, 25 meters (unit is meters)	1820712000	100 mtr.	1
33	Adapter bushing, 1/2 BSPP male thread, 1/2" NPT female thread, 10/pack	R432011745	10	1
33	Adapter bushing, 1/2" NPT male thread, 1/2 BSPP female thread, 10/pack	R432012025	10	1
33	Adapter bushing, 1/4 BSPP male thread, 1/4" NPT female thread, 10/pack	R432011874	20	2
33	Adapter bushing, 1/4" NPT male thread, 1/4 BSPP female thread, 10/pack	R432012023	10	1
33	Adapter bushing, 1/8 BSPP male thread, 1/8" NPT female thread, 10/pack	R432011744	20	2
33	Adapter bushing, 1/8" NPT male thread, 1/8 BSPP female thread, 10/pack	R432012022	10	1
33	Adapter bushing, 3/8 BSPP male thread, 3/8" NPT female thread, 10/pack	R432011847	20	2
33	Adapter bushing, 3/8" NPT male thread, 3/8 BSPP female thread, 10/pack	R432012024	10	1
33	Flow control, meter-out, 1/2 BSPP male to 1/2 BSPP female 90, 1/pack	0821200207	4	1
33	Flow control, meter-out, 1/2" NPT male to 1/2" NPT female, 1/pack	R432027184	4	1
33	Flow control, meter-out, 1/4 BSPP male to 1/4 BSPP female 90, 1/pack	0821200205	4	1
33	Flow control, meter-out, 1/4" NPT male to 1/4" NPT female, 1/pack	R432027182	4	1
33	Flow control, meter-out, 1/8 BSPP male to 1/8 BSPP female 90, 1/pack	0821200204	4	1
33	Flow control, meter-out, 1/8" NPT male to 1/8" NPT female, 1/pack	R432027181	5	2
33	Flow control, meter-out, 3/8 BSPP male to 3/8 BSPP female 90, 1/pack	0821200206	4	1
33	Flow control, meter-out, 3/8" NPT male to 3/8" NPT female, 1/pack	R432027183	4	1
33	QR1-DWA-D014-1032 1/pack elbow flow control 1/4" tube to 10-32	R432002369	50	1
33	QR1-DWA-D014-N014 1/pack elbow flow control 1/4" tube to 1/4 NPT	R432002371	50	1
33	QR1-DWA-D014-N018 10/pack elbow flow control 1/4" tube to 1/8 NPT	R432002370	50	1
33	QR1-DWA-D038-N014 10/pack elbow flow control 3/8" tube to 1/4 NPT	R432002377	50	1
33	QR1-DWA-D532-1032 1/pack elbow flow control 5/32" tube to 10-32	R432002367	50	1
33	QR1-DWA-D532-N018 10/pack elbow flow control 5/32" tube to 1/8 NPT	R432002368	50	1

GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
33	QR1-DWA-DA06-G018 10/pack meter-in flow ctrl, 6mm tube to 1/8 BSPP	R432031082	10	1
33	QR1-MAN-D018-1032 25/pack straight fitting 1/8" tube to 10-32	R432000322	50	1
33	QR1-MAN-D018-N018 10/pack straight fitting 1/8" tube to 1/8 NPT	R432000321	50	1
33	QR1-MVT-D018-N018 10/pack elbow fitting 1/8" tube to 1/8 NPT	R432000357	50	1
33	QR1-RBS-D012 20/pack plug 1/2" stem	R432000048	40	1
33	QR1-RBS-D014 20/pack plug 1/4" stem	R432000049	60	2
33	QR1-RBS-D038 20/pack plug 3/8" stem	R432000050	40	1
33	QR1-RBS-D516 20/pack plug 5/16" stem	R432002354	40	1
33	QR1-RBS-D532 20/pack plug 5/32" stem	R432002353	40	1
33	QR1-RED-D014-D532 10/pack tube reducer 1/4 stem to 5/32"	R432000066	50	1
33	QR1-RED-D038-D014 10/pack tube reducer 3/8 stem to 1/4"	R432000067	50	1
33	QR1-RED-D516-D014 10/pack tube reducer 5/16 stem to 1/4"	R432000069	50	1
33	QR1-RPN-D012-N012 5/pack straight fitting 1/2" tube to 1/2 NPT	R432000123	50	1
33	QR1-RPN-D012-N014 10/pack straight fitting 1/2" tube to 1/4 NPT	R432000124	50	1
33	QR1-RPN-D012-N038 10/pack straight fitting 1/2" tube to 3/8 NPT	R432000125	50	1
33	QR1-RPN-D014-1032 10/pack straight fitting 1/4" tube to 10-32	R432000126	50	1
33	QR1-RPN-D014-N014 10/pack straight fitting 1/4" tube to 1/4 NPT	R432000127	100	2
33	QR1-RPN-D014-N018 10/pack straight fitting 1/4" tube to 1/8 NPT	R432000128	100	2
33	QR1-RPN-D014-N038 10/pack straight fitting 1/4" tube to 3/8 NPT	R432000129	50	1
33	QR1-RPN-D038-N012 10/pack straight fitting 3/8" tube to 1/2 NPT	R432000132	50	1
33	QR1-RPN-D038-N014 10/pack straight fitting 3/8" tube to 1/4 NPT	R432000133	70	2
33	QR1-RPN-D038-N018 10/pack straight fitting 3/8" tube to 1/8 NPT	R432002636	50	1
33	QR1-RPN-D038-N038 10/pack straight fitting 3/8" tube to 3/8 NPT	R432000134	50	1
33	QR1-RPN-D516-N014 10/pack straight fitting 5/16" tube to 1/4 NPT	R432000136	50	1
33	QR1-RPN-D516-N018 10/pack straight fitting 5/16" tube to 1/8 NPT	R432000137	50	1
33	QR1-RPN-D532-1032 10/pack straight fitting 5/32" tube to 10-32	R432000139	50	1
33	QR1-RPN-D532-N014 10/pack straight fitting 5/32" tube to 1/4 NPT	R432000140	50	1
33	QR1-RPN-D532-N018 10/pack straight fitting 5/32" tube to 1/8 NPT	R432000141	50	1
33	QR1-RSK-D014 10/pack tube union 1/4" to 1/4"	R432000151	50	1
33	QR1-RSK-D038 10/pack tube union 3/8" to 3/8"	R432000152	50	1
33	QR1-RSM-D012 10/pack bulkhead tube union 1/2" to 1/2"	R432000155	50	1
33	QR1-RSM-D014 10/pack bulkhead tube union 1/4" to 1/4"	R432000156	50	1
33	QR1-RSM-D038 10/pack bulkhead tube union 3/8" to 3/8"	R432000157	50	1
33	QR1-RSM-D516 10/pack bulkhead tube union 5/16" to 5/16"	R432000158	50	1
33	QR1-RSR-D014-D532 10/pack reducer union 1/4" to 5/32"	R432000162	70	2
33	QR1-RSR-D516-D014 10/pack reducer union 5/16" to 1/4"	R432000164	100	2
33	QR1-RTK-D012 10/pack tee 1/2" tube	R432000166	50	1
33	QR1-RTK-D014 10/pack tee 1/4" tube	R432000167	50	1
33	QR1-RTK-D038 10/pack tee 3/8" tube	R432000168	50	1
33	QR1-RTK-D516 10/pack tee 5/16" tube	R432000169	50	1
33	QR1-RTK-D532 10/pack tee 5/32" tube	R432000170	50	1
33	QR1-RTT-D014-N014 10/pack branch tee 1/4" tube to 1/4 NPT	R432000175	50	1
33	QR1-RTT-D038-N014 10/pack branch tee 3/8" tube to 1/4 NPT	R432000179	50	1

GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
33	QR1-RTT-D516-N018 10/pack branch tee 5/16" tube to 1/8 NPT	R432000183	50	1
33	QR1-RVK-D014 10/pack union elbow 1/4" tube	R432000208	70	2
33	QR1-RVK-D038 10/pack union elbow 3/8" tube	R432000209	70	2
33	QR1-RVT-D012-N012 10/pack elbow fitting 1/2" tube to 1/2 NPT	R432000229	50	1
33	QR1-RVT-D012-N014 10/pack elbow fitting 1/2" tube to 1/4 NPT	R432000230	50	1
33	QR1-RVT-D012-N038 10/pack elbow fitting 1/2" tube to 3/8 NPT	R432000231	50	1
33	QR1-RVT-D014-1032 10/pack elbow fitting 1/4" tube to 10-32	R432000232	50	1
33	QR1-RVT-D014-N014 10/pack elbow fitting 1/4" tube to 1/4 NPT	R432000233	100	2
33	QR1-RVT-D014-N018 10/pack elbow fitting 1/4" tube to 1/8 NPT	R432000234	100	2
33	QR1-RVT-D014-N038 5/pack elbow fitting 1/4" tube to 3/8 NPT	R432000235	50	1
33	QR1-RVT-D038-N012 10/pack elbow fitting 3/8" tube to 1/2 NPT	R432000236	50	1
33	QR1-RVT-D038-N014 10/pack elbow fitting 3/8" tube to 1/4 NPT	R432000237	70	2
33	QR1-RVT-D038-N018 10/pack elbow fitting 3/8" tube to 1/8 NPT	R432002637	50	1
33	QR1-RVT-D038-N038 10/pack elbow fitting 3/8" tube to 3/8 NPT	R432000238	50	1
33	QR1-RVT-D516-N014 10/pack elbow fitting 5/16" tube to 1/4 NPT	R432000240	50	1
33	QR1-RVT-D516-N038 10/pack elbow fitting 5/16" tube to 3/8 NPT	R432000242	50	1
33	QR1-RVT-D532-1032 10/pack elbow fitting 5/32" tube to 10-32	R432000243	70	2
33	QR1-RVT-D532-N014 10/pack elbow fitting 5/32" tube to 1/4 NPT	R432000244	50	1
33	QR1-RVT-D532-N018 10/pack elbow fitting 5/32" tube to 1/8 NPT	R432000245	50	1
33	QR1-RY2-D014 10/pack push-in Y 1/4 stem to 2x 1/4"	R432000262	50	1
33	QR1-RYK-D014 10/pack Y 1/4" tube	R432000267	70	2
33	QR1-RYK-D038 10/pack Y 3/8" tube	R432000268	50	1
33	QR1-RYK-D516 10/pack Y 5/16" tube	R432000269	70	2
33	QR1-RYK-D532 10/pack Y 5/32" tube	R432000270	50	1
33	QR1-S-RBS-DA06 20/pack plug 6mm stem	2123206000	40	1
33	QR1-S-RBS-DA12 10/pack plug 12mm stem	2123212000	50	1
33	QR1-S-RED-DA08-DA06 10/pack push-in reducer 6mm to 4mm	2121708060	50	1
33	QR1-S-RED-DA10-DA06 10/pack push-in reducer 10mm to 6mm	2121710060	50	1
33	QR1-S-RPN-G014-DA04 10/pack straight fitting 4mm tube to 1/4 BSPP	2121004140	50	1
33	QR1-S-RPN-G014-DA06 10/pack straight fitting 6mm tube to 1/4 BSPP	2121006140	50	1
33	QR1-S-RPN-G014-DA08 10/pack straight fitting 1/4 BSPP to 8mm (5/16") tube	2121008140	50	1
33	QR1-S-RPN-G014-DA10 10/pack straight fitting 1/4 BSPP to 10mm tube	2121010140	50	1
33	QR1-S-RPN-G014-DA12 10/pack straight fitting 1/4 BSPP to 12mm tube	2121012140	50	1
33	QR1-S-RPN-G018-DA04 10/pack straight fitting 4mm tube to 1/8 BSPP	2121004180	50	1
33	QR1-S-RPN-G018-DA06 10/pack straight fitting 6mm tube to 1/8 BSPP	2121006180	50	1
33	QR1-S-RPN-G018-DA08 10/pack straight fitting 1/8 BSPP to 8mm (5/16") tube	2121008180	50	1
33	QR1-S-RPN-G038-DA08 10/pack straight fitting 3/8 BSPP to 8mm (5/16") tube	2121008380	50	1
33	QR1-S-RPN-G038-DA10 10/pack straight fitting 3/8 BSPP to 10mm tube	2121010380	50	1
33	QR1-S-RPN-G038-DA12 10/pack straight fitting 3/8 BSPP to 12mm tube	2121012380	50	1
33	QR1-S-RPN-M005-DA06 10/pack straight fitting 6mm tube to M5	2121006050	50	1

GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
33	QR1-S-RSK-DA06 10/pack tube union 6mm tube	2121506000	50	1
33	QR1-S-RSK-DA10 10/pack tube union 10mm tube	2121510000	50	1
33	QR1-S-RTK-DA06 10/pack tee 6mm tube	2121106000	30	1
33	QR1-S-RTK-DA10 10/pack tee 10mm tube	2121110000	30	1
33	QR1-S-RTK-DA12 10/pack tee 12mm tube	2121112000	30	1
33	QR1-S-RVK-DA06 10/pack union elbow 6mm tube	2121206000	30	1
33	QR1-S-RVT-G012-DA12 10/pack elbow fitting 1/2 BSPP to 12mm tube	2122012120	50	1
33	QR1-S-RVT-G014-DA04 10/pack elbow fitting 1/4 BSPP to 4mm (5/32") tube	2122004140	50	1
33	QR1-S-RVT-G014-DA06 10/pack elbow fitting 1/4 BSPP to 6mm tube	2122006140	50	1
33	QR1-S-RVT-G014-DA08 10/pack elbow fitting 1/4 BSPP to 8mm (5/16") tube	2122008140	50	1
33	QR1-S-RVT-G014-DA10 10/pack elbow fitting 1/4 BSPP to 10mm tube	2122010140	50	1
33	QR1-S-RVT-G014-DA12 10/pack elbow fitting 1/4 BSPP to 12mm tube	2122012140	50	1
33	QR1-S-RVT-G018-DA04 10/pack elbow fitting 1/8 BSPP to 4mm (5/32") tube	2122004180	50	1
33	QR1-S-RVT-G018-DA06 10/pack elbow fitting 1/8 BSPP to 6mm tube	2122006180	50	1
33	QR1-S-RVT-G018-DA08 10/pack elbow fitting 1/8 BSPP to 8mm (5/16") tube	2122008180	50	1
33	QR1-S-RVT-G038-DA08 10/pack elbow fitting 3/8 BSPP to 8mm (5/16") tube	2122008380	50	1
33	QR1-S-RVT-M005-DA06 10/pack elbow fitting M5 to 6mm tube	2122006050	50	1
33	QR1-S-RYK-DA06 10/pack Y 6mm tube	2121806000	30	1
33	QR1-S-RYK-DA12 10/pack Y 12mm tube	2121812000	30	1
33	Silencer, 1 BSPP thread, Polyethylene, 1/pack	1827000024	10	1
33	Silencer, 1/2 BSPP thread, Polyethylene, 1/pack	1827000022	10	1
33	Silencer, 1/2 BSPP thread, Sintered Bronze, 2/pack	1827000003	10	1
33	Silencer, 1/2" OD stem for push-in connection, Polyethylene, 5/pack	R412007714	10	1
33	Silencer, 1/2"NPT, metal, threaded	R432011952	10	1
33	Silencer, 1/4 BSPP thread, Polyethylene, 5/pack	1827000020	10	1
33	Silencer, 1/4 BSPP thread, Sintered Bronze, 10/pack	1827000001	10	1
33	Silencer, 1/4" OD stem for push-in connection, Polyethylene, 5/pack	R412005727	10	1
33	Silencer, 1/4"NPT, metal threaded	R432012060	10	1
33	Silencer, 1/8 BSPP thread, Polyethylene, 5/pack	1827000019	10	1
33	Silencer, 1/8 BSPP thread, Sintered Bronze, 10/pack	1827000000	10	1
33	Silencer, 1/8"NPT, metal threaded	R432012062	10	1
33	Silencer, 10mm OD stem for push-in connection, Polyethylene, 5/pack	R412000593	10	1
33	Silencer, 12mm OD stem for push-in connection, Polyethylene, 5/pack	R412007715	10	1
33	Silencer, 3/4 BSPP thread, Polyethylene, 1/pack	1827000023	10	1
33	Silencer, 3/4"NPT, metal, threaded	R432012059	10	1
33	Silencer, 3/8 BSPP thread, Polyethylene, 2/pack	1827000021	10	1
33	Silencer, 3/8 BSPP thread, Sintered Bronze, 5/pack	1827000002	10	1
33	Silencer, 3/8" OD stem for push-in connection, Polyethylene, 5/pack	R412005728	10	1
33	Silencer, 3/8"NPT, metal, threaded	R432012058	10	1

GoTo Focused Delivery Program: Part Numbers

Page Number	Description/Model Code	Part Number	Maximum Quantity	Shipment (Business Days)
33	Silencer, 6mm OD stem for push-in connection, Polyethylene, 5/pack	R412000591	10	1
33	Silencer, 8mm OD stem for push-in connection, Polyethylene, 5/pack	R412007520	10	1
33	Silencer, M5 thread, Polyethylene, 5/pack	1827000018	10	1
33	TU1-S-PUR-006-0105-BU-0025, blue, 25 meters, 6mm (unit is meters)	1820712032	25	1
33	TU1-S-PUR-006-0105-BU-0100, blue, 100 meters, 6mm (unit is meters)	1820712037	100 mtr.	1
33	TU1-S-PUR-006-0105-NT-0100, clear, 100 meters, 6mm (unit is meters)	1820712006	100 mtr.	1
33	TU1-S-PUR-008-0115-BU-0025, blue, 25 meters, 8mm (unit is meters)	1820712033	25	1
33	TU1-S-PUR-010-0125-BU-0025, blue, 25 meters, 10mm (unit is meters)	1820712035	25	1
33	TU1-S-PUR-010-0125-BU-0100, blue, 100 meters,10mm (unit is meters)	1820712039	100 mtr.	1
33	TU1-S-PUR-010-0125-NT-0100, clear, 100 meters, 10mm (unit is meters)	1820712009	100 mtr.	1
33	TU1-S-PUR-012-0150-BU-0025, blue, 25 meters, 12mm (unit is meters)	1820712034	25	1
33	TU1-S-PUR-012-0150-BU-0100, blue, 100 meters,12mm (unit is meters)	1820712040	100 mtr.	1
33	TU1-S-PUR-012-0150-NT-0100, clear, 100 meters, 12mm (unit is meters)	1820712082	100 mtr.	1

GoTo Focused Delivery Program: Notes

A large grid of small dots, intended for taking notes. The grid consists of approximately 30 columns and 40 rows of dots, spaced evenly across the page.

GoTo Focused Delivery Program: Notes



GoTo Products app: New digital tools add even more speed to GoTo Focused Delivery Program

The GoTo Products apps for iPhone® and iPad® put the power of Rexroth's GoTo Focused Delivery Program at your fingertips. Find products, connect with your distributor, get GoTo updates, and more.

For engineers and OEM project managers on the go, Bosch Rexroth has a GoTo Products app in the iTunes® App Store. It's now faster and easier than ever for Rexroth customers to browse the industry's most popular collection of products for manufacturing, automation, and machinery engineering.

The GoTo app helps users find the information they need quickly and easily: User friendly search tools make it easy to find the right technology or part number from among Rexroth's thousands of Drive & Control products and jump instantly to basic product and technical information. The app lets users build product lists and e-mail them, create "favorites" lists, view helpful product videos, and connect with Bosch Rexroth in the U.S. on Facebook, Twitter, and YouTube—all from one easy interface. And the Sync-on-Demand feature ensures that you always have the latest data.

Bosch Rexroth's GoTo Focused Delivery Program streamlines everything to make it easier to get a selection of Rexroth's most popular products faster. The GoTo Products app carries the program a significant step further by putting critical GoTo information at the ready, anywhere at anytime. Look for it in the iTunes App Store by searching for "Bosch Rexroth" or "GoTo Products."



For more information on our GoTo Program and the apps for iPhone® and iPad®, visit www.boschrexroth-us.com/GoTo



Bosch Rexroth Corporation

Corporate Headquarters

14001 South Lakes Drive

Charlotte, NC 28273

Telephone: 1-800-REXROTH (739-7684)

Email: info@boschrexroth-us.com

Contact Us: www.boschrexroth-us.com/contactus