

Preparation of compressed air → Maintenance units and components

Pressure regulator, Series MH1-RGS

► G 1/4 - G 1/2 ► Qn=510 - 3000 l/min ► Activation: mechanical



17158_a

Mounting orientation	Any
Working pressure min./max.	0.5 bar / 17 bar
Medium	Compressed air
Medium temperature min./max.	-30 °C / +80 °C
Ambient temperature min./max.	-30 °C / +80 °C
Regulator type	Diaphragm-type pressure regulator
Regulator function	with relieving air exhaust
Adjustment range min./max.	0.5 bar / 9 bar
Pressure supply	single
 Materials:	
Housing	Stainless steel, acid-proof
Seals	Acrylonitrile Butadiene Rubber


Technical Remarks

- The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C.

	Port	Qn [l/min]	Weight [kg]	Note	Part No.
	G 1/4	510	0.3	Fig. 1	R432034650
	G 1/2	3000	1.01	Fig. 2	R432034657


Max. pressure gauge Ø in blocked state [mm]: 50
 Nominal flow Qn at p1 = 6.3 bar and Δp = 1 bar

Flow rate characteristic, Fig. 1

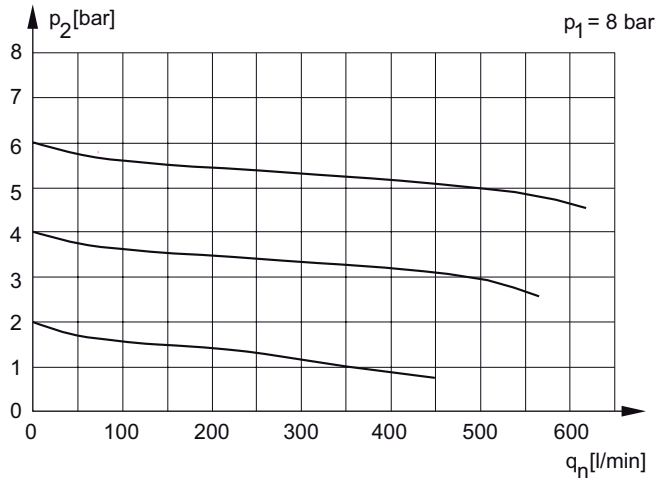


17200

p1 = Working pressure
 p2 = Secondary pressure
 qn = Nominal flow

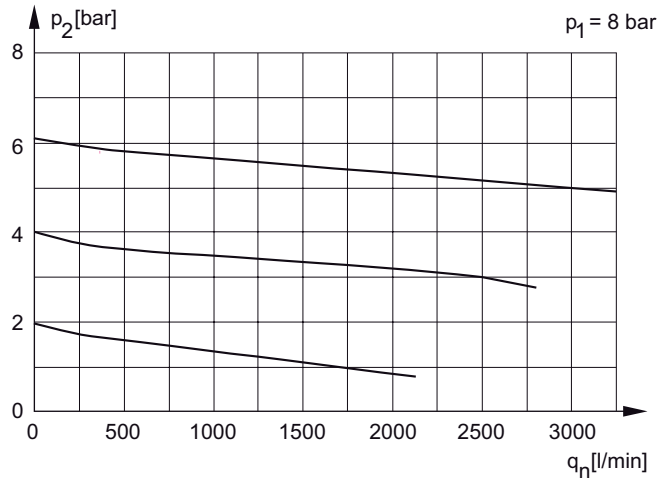Preparation of compressed air → Maintenance units and components
Pressure regulator, Series MH1-RGS
► G 1/4 - G 1/2 ► Qn=510 - 3000 l/min ► Activation: mechanical
Flow rate characteristic, Fig. 2


17199

p_1 = Working pressure
 p_2 = Secondary pressure
 q_n = Nominal flow

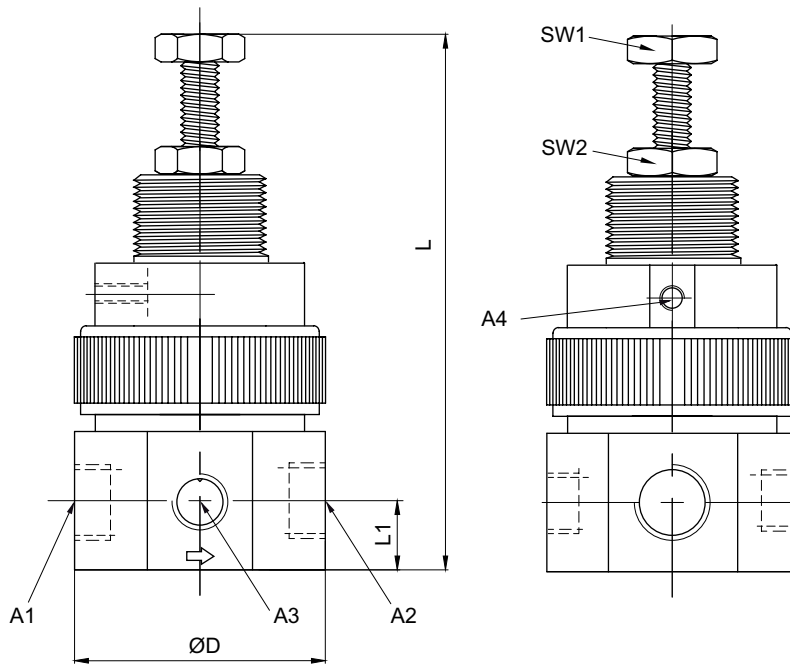Dimensions in mm, Fig. 1


15801

A1 = input
 A2 = output
 A3 = pressure gauge connection
 A4 = relieving exhaust

Preparation of compressed air → Maintenance units and components


Pressure regulator, Series MH1-RGS

► G 1/4 - G 1/2 ► Qn=510 - 3000 l/min ► Activation: mechanical

A1	A2	A3	A4	L *)	L1	ØD	SW1	SW2					
G 1/4	G 1/4	G 1/8	M5	85	9.9	35.8	10	10					

*) max.

Dimensions in mm, Fig. 2

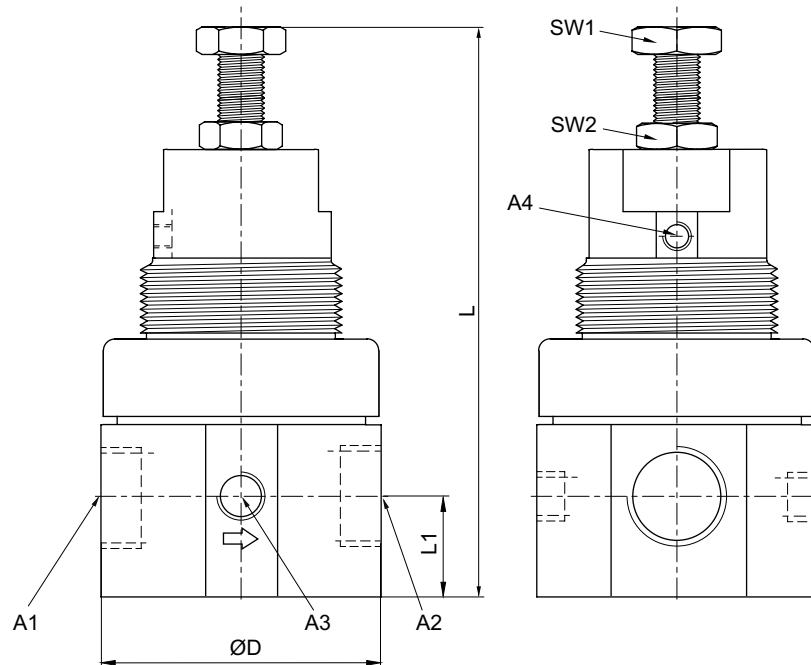

15805

- A1 = input
- A2 = output
- A3 = pressure gauge connection
- A4 = relieving exhaust

A1	A2	A3	A4	L *)	L1	ØD	SW1	SW2					
G 1/2	G 1/2	G 1/8	M5	121	20.6	57.5	13	13					

*) max.